



KUBE+ Guides

Version: 2025.0.0.0

KUBE+ Guides

Welcome to the KUBE+ guides, introducing AppViewX KUBE+, a cutting-edge K8s Crypto Mesh designed for cloud and Kubernetes environments. This platform ensures top-notch security for containerized workloads by seamlessly handling TLS certificate issuance and management through automation. With KUBE+, administrators gain full control over the lifecycle of X.509 certificates within their Kubernetes cluster, empowering them with comprehensive certificate management capabilities.

Copyright AppViewX, Inc.

Copyright © 2025 AppViewX, Inc. All Rights Reserved.

This document may not be copied, disclosed, transferred, or modified without the prior written consent of AppViewX, Inc. While all content is believed to be correct at the time of publication, it is provided as general-purpose information. The content is subject to change without notice and is provided “as is” and with no expressed or implied warranties whatsoever, including, but not limited to, a warranty for accuracy made by AppViewX. The software described in this document is provided under written license only, contains valuable trade secrets and proprietary information, and is protected by the copyright laws of the United States and other countries. Unauthorized use of software or its documentation can result in civil damages and criminal prosecution.

Trademarks

The trademarks, logos, and service marks displayed in this manual are the property of AppViewX or other third parties. Users are not permitted to use these marks without the prior written consent of AppViewX or such third party which may own the mark.

Contact Information

AppViewX, Inc.

222 Broadway, FL 19

New York, NY 10038

Email: info@appviewx.com

Web: www.appviewx.com

Contents

KUBE+ Guides.....	ii
Preface.....	18
Revision History.....	18
About this Guide	18
Audience.....	18
Third-Party Software Acknowledgments.....	18
Text Conventions.....	18
Chapter 1. KUBE+ User Guide.....	19
KUBE+ Overview.....	19
Simplify and Modernize Certificate Lifecycle Management (CLM) in Kubernetes.....	20
3 Steps to Bridge the Gap between Agility and Security in Kubernetes.....	20
KUBE+ Features.....	20
Getting Started.....	21
Know your Deployments for KUBE+.....	21
KUBE+ Deployment Architecture.....	22
Overview.....	22
KUBE+.....	23
Cert Orchestrator.....	23
Communication Flow.....	24
Authentication and Access Control.....	25
Visibility & Control.....	27
Overview.....	27
Prerequisites to Onboard a Cluster.....	27
Cluster Inventory.....	28
Docker Image and Helm Chart Validation Using Cosign.....	43
Visibility.....	44
Managing Certificate Groups for Kubernetes Clusters.....	44

Certificate Endpoint View – Understanding Where Certificates Are Used.....	45
Holistic View.....	45
Server.....	47
Client.....	61
Trust Store.....	75
Dashboard - Insights.....	78
Dashboard Widgets Overview.....	78
Certificate Management Metrics.....	79
Platform Adoption & SelfService Features.....	81
Policy Enforcement.....	82
Certificate Authority (CA) Integration.....	82
Creating the CA Policy.....	175
Groups.....	274
Cluster Policy.....	276
Appendix A: Prerequisites for Enabling the Integrated Windows Gateway Mode.....	286
Automate Certificate Lifecycle Management.....	288
Steps for Automating Certificate Lifecycle Management.....	289
Secure Apps Inventory.....	289
Trust Store Bundles Inventory.....	313
Secure Service Mesh with mTLS authentication.....	318
Why Zero Trust is Critical?.....	318
AppViewX Integration with Istio Service Mesh.....	318
Enabling AppViewX Signer.....	319
Mesh Inventory.....	322
Onboarding a Mesh.....	323
Deleting a Mesh.....	326
Significance of Issuer CA Mode.....	326
Enable External Signing.....	327
Overview.....	327

Creating a Signer Profile.....	328
Integrating Istio with Custom CA.....	329
About Integrating Istio with Custom CA.....	329
Alerts and Logs.....	329
Expiry Alerts.....	330
Logs.....	336
Viewing Details of a Log.....	337
Filtering the Logs.....	337
Automation.....	338
Requests.....	338
Rules.....	340
System Administration.....	343
Crypto Minions.....	343
Configuring Cluster Settings.....	344
Configuring Policy Settings.....	345
Configuring Email Settings.....	346
Setting up Configurations for Expired Certificates.....	346
Auto Enrollment.....	347
Notification Event.....	371
Enabling Custom Workflow Integration.....	372
Uninstall and Cleanup.....	373
Steps to Uninstall/Cleanup KUBE+ Deployment.....	373
FAQ and Troubleshooting.....	375
Command Line Cheat Sheet.....	375
FAQ.....	377
Chapter 2. KUBE+ API Guide.....	384
API Reference.....	384
Enable ACF Permission for API Reference.....	384
Best Practices for Working with the AppViewX API.....	385

Understanding the AppViewX KUBE+ API.....	386
RESTful HTTPS Requests.....	387
Requests.....	387
Request Structure.....	388
Response Structure.....	388
Description of Server Responses.....	389
URI Scheme.....	389
Types of Accounts in AppViewX.....	389
Authentication using a User Account.....	390
Retrieve session ID using login API.....	391
Using Session ID for further API calls.....	395
Authentication using a Service Account.....	399
Retrieve Access Token using get-service-token API.....	400
Using Access Token in the header for further API calls.....	403
Onboard a Cluster.....	407
Request Structure.....	407
Payload.....	408
Response Structure.....	408
Status Codes.....	409
Sample Request/Response.....	409
Reference.....	410
What's Next.....	411
Generated Cluster Onboarding Command Using Service Account.....	411
Request Structure.....	411
Payload.....	412
Response Structure.....	413
Status Codes.....	414
Sample Request/Response.....	414
Reference.....	415

What's Next.....	416
Get Secret YAML Using Service Account Configured in AppViewX.....	416
Request Structure.....	416
Payload.....	417
Response Structure.....	417
Sample Request/Response.....	418
Reference.....	419
What's Next.....	419
Manage Clusters.....	419
Request Structure.....	420
Payload.....	420
Response Structure.....	421
Status Codes.....	421
Sample Request/Response.....	422
Reference.....	422
What's Next.....	423
Unmanage Clusters.....	423
Request Structure.....	423
Payload.....	424
Response Structure.....	424
Status Codes.....	425
Sample Request/Response.....	425
Reference.....	426
What's Next.....	427
Issuer CA Create - Deprecated.....	427
Request Structure.....	427
Response Structure.....	429
Sample Request/Response.....	429
Reference.....	430

What's Next.....	431
Issuer CA Create - Amazon Private CA.....	431
Issuer CA Create - AppViewX CA.....	435
Issuer CA Create - Comodo Certificate Manager CA.....	439
Issuer CA Create - DigiCert CA.....	442
Issuer CA Create - DigiCert MPKI CA.....	446
Issuer CA Create - EJBCA CA.....	450
Issuer CA Create - Entrust CA.....	454
Issuer CA Create - Entrust MPKI CA.....	458
Issuer CA Create - GlobalSign CA.....	461
Issuer CA Create - GlobalSignAtlas CA.....	465
Issuer CA Create - GlobalSignMSSL CA.....	468
Issuer CA Create - HashicorpVault CA.....	472
Issuer CA Create - InCommon CA.....	476
Issuer CA Create - Nexus CA.....	479
Issuer CA Create - Trustwave CA.....	483
Issuer CA Create - Microsoft Enterprise CA.....	486
Issuer CA Create - Microsoft Standalone CA.....	490
Issuer CA Create - Google CA.....	493
Issuer CA Create - AppViewX PKIaaS CA.....	497
Issuer CA Create - Amazon CA.....	500
Issuer CA Create - GoDaddy CA.....	504
Issuer CA Create - LetsEncrypt CA.....	508
Cluster Policy Template Create.....	511
Request Structure.....	511
Payload.....	512
Response Structure.....	513
Sample Request/Response.....	514
Reference.....	516

What's Next.....	516
Amazon Private CA.....	517
AppViewX CA.....	520
Comodo Certificate Manager CA.....	523
DigiCert CA.....	527
DigiCert MPKI CA.....	531
EJBCA CA.....	534
Entrust CA.....	538
Entrust MPKI CA.....	542
GlobalSign CA.....	545
GlobalSignAtlas CA.....	549
GlobalSignMSSL CA.....	552
HashicorpVault CA.....	556
InCommon CA.....	559
Nexus CA.....	562
Trustwave CA.....	566
Microsoft Enterprise CA.....	569
Microsoft Standalone CA.....	572
Google CA.....	576
AppViewX PKIaaS CA.....	579
Map Cluster to Issuer CA - Deprecated.....	583
Request Structure.....	584
Payload.....	584
Response Structure.....	585
Status Codes.....	585
Sample Request/Response.....	586
Reference.....	587
What's Next.....	587
Map Cluster Policy to Use Legacy CA Setting.....	587

Request Structure.....	588
Payload.....	588
Response Structure.....	589
Status Codes.....	590
Sample Request/Response.....	590
Reference.....	591
What's Next.....	592
Map Cluster Policy Using Policy Central.....	592
Request Structure.....	592
Payload.....	593
Response Structure.....	593
Status Codes.....	594
Sample Request/Response.....	594
Reference.....	595
What's Next.....	596
Push Issuer CA to Target Cluster - Deprecated.....	596
Request Structure.....	596
Payload.....	597
Response Structure.....	598
Status Codes.....	598
Sample Request/Response.....	599
Reference.....	600
What's Next.....	600
Push Cluster Policy Mapping to Legacy CA Setting.....	601
Request Structure.....	601
Payload.....	602
Response Structure.....	602
Status Codes.....	603
Sample Request/Response.....	603

Reference.....	604
What's Next.....	605
Push Cluster Policy Mapping to Policy Central CA Setting.....	605
Request Structure.....	605
Payload.....	606
Response Structure.....	607
Status Codes.....	607
Sample Request/Response.....	608
Reference.....	609
What's Next.....	609
Revoke Issuer CA from Target Cluster.....	609
Request Structure.....	610
Payload.....	611
Response Structure.....	611
Status Codes.....	612
Sample Request/Response.....	612
Reference.....	613
What's Next.....	614
Revoke Cluster Policy Mapping from Legacy CA Setting.....	614
Request Structure.....	614
Payload.....	615
Response Structure.....	615
Status Codes.....	616
Sample Request/Response.....	616
Reference.....	617
What's Next.....	618
Revoke Cluster Policy Mapping from Policy Central CA Setting.....	618
Request Structure.....	618
Payload.....	619

Response Structure.....	620
Status Codes.....	620
Sample Request/Response.....	621
Reference.....	622
What's Next.....	623
Delete Cluster Policy Mapping from Legacy CA Setting.....	623
Request Structure.....	623
Payload.....	624
Response Structure.....	624
Status Codes.....	625
Sample Request/Response.....	625
Reference.....	626
What's Next.....	627
Delete Cluster Policy Mapping from Policy Central CA Setting.....	627
Request Structure.....	627
Payload.....	628
Response Structure.....	629
Status Codes.....	629
Sample Request/Response.....	629
Reference.....	630
What's Next.....	631
Create Cert CRD Instance in Cluster.....	631
Request Structure.....	631
Payload.....	632
Response Structure.....	635
Status Codes.....	635
Sample Request/Response.....	635
Reference.....	638
Get CA Settings YAML.....	639

Request Structure.....	639
Payload.....	640
Response Structure.....	640
Status Codes.....	641
Sample Request/Response.....	641
Reference.....	642
What's Next.....	643
Enroll Certificate to K8s Secret.....	643
Request Structure.....	643
Payload.....	644
Response Structure.....	647
Status Codes.....	647
Sample Request/Response.....	648
Reference.....	649
What's Next.....	650
Push Create Certificate to the End Cluster.....	650
Request Structure.....	650
Payload.....	651
Status Codes.....	651
Sample Request/Response.....	652
Reference.....	653
What's Next.....	653
TrustStore Content Download.....	654
Request Structure.....	654
Payload.....	655
Status Codes.....	655
Sample Request/Response.....	656
Reference.....	657
What's Next.....	657

Save TrustStore Template.....	658
Request Structure.....	658
Payload.....	659
Status Codes.....	661
Sample Request/Response.....	661
Reference.....	663
What's Next.....	664
Push TrustStore Bundle to Cluster.....	664
Request Structure.....	664
Payload.....	665
Status Codes.....	665
Sample Request/Response.....	666
Reference.....	666
What's Next.....	667
Revoke TrustStore Bundle.....	667
Request Structure.....	667
Payload.....	668
Status Codes.....	669
Sample Request/Response.....	669
Reference.....	670
What's Next.....	670
Delete TrustStore Bundle.....	671
Request Structure.....	671
Payload.....	672
Status Codes.....	672
Sample Request/Response.....	672
Reference.....	673
What's Next.....	674
Create TrustStore Bundle.....	674

Request Structure.....	674
Payload.....	675
Status Codes.....	675
Sample Request/Response.....	676
Reference.....	676
What's Next.....	677
Delete TrustStore Template.....	677
Request Structure.....	677
Status Codes.....	678
Sample Request/Response.....	679
Reference.....	679
What's Next.....	680
Chapter 3. KUBE+ Upgrade Guide.....	681
Introduction.....	681
Steps for Cert-Orchestrator Migration from v1.2 to v1.3.....	681
Steps for Cert-Orchestrator Migration from v1.3 to v1.4.....	682
Chapter 4. KUBE+ as an EKS Addon - AWS Marketplace.....	684
AppViewX KUBE+ for Workload Certificate Management: An AWS EKS Add-On.....	684
Benefits.....	684
Install the EKS Add-on.....	684
Step 1: Subscribe to the EKS Add-on in the AWS Marketplace.....	684
Step 2: Ensure access to a valid AppViewX KUBE+ Subscription.....	689
Step 3: Connect your EKS cluster to AppViewX.....	690
Step 4: Deploy credentials and manage EKS cluster in AppViewX.....	692
Manage SSL/TLS certificates in your EKS.....	693
Signing Up for the Free Trial via the AWS Marketplace.....	693
Step 1: Accessing the AWS Marketplace Sign Up Page.....	693
Step 2: Filling the Sign Up Form.....	694
Step 3: Verifying your Email.....	695

Step 4: Logging in to your SaaS Account.....696

Step 5: Setting up the AppViewX Cloud Connector.....699

Step 6: Getting Started with AppViewX SaaS.....699

Preface

Revision History

Revision	Description	Date
1.0	Initial release of document for Release 2025.0.0.	November 2025

About this Guide

AppViewX KUBE+ is an advanced Kubernetes Crypto Mesh designed to deliver enhanced security for containerized workloads in Kubernetes environments. It offers automated TLS certificate issuance and lifecycle management, providing administrators with comprehensive control over X.509 certificates within their Kubernetes cluster.

Audience

The document is intended for internal users and customers of AppViewX.

Third-Party Software Acknowledgments

This section serves as a placeholder to document the third-party components referenced in this guide, along with their associated trademark information.

For example,

- This document includes software details developed by VMware, Inc. (www.vmware.com).

Text Conventions

The following text conventions are used in this document:

Convention	Description
boldface	Boldface type indicates graphical user interface elements associated with an action, or terms defined in text or the glossary.
<i>italic</i>	Italic type indicates book titles, emphasis, or placeholder variables for which you supply particular values.
<code>codeblock</code>	Indicates commands within a paragraph, URLs, code in examples, text that appears on the screen, or text that you enter.

Chapter 1: KUBE+ User Guide

Welcome to the KUBE+ guide, introducing AppViewX KUBE+, a cutting-edge K8s Crypto Mesh designed for cloud and Kubernetes environments. This platform ensures top-notch security for containerized workloads by seamlessly handling TLS certificate issuance and management through automation. With KUBE+, administrators gain full control over the lifecycle of X.509 certificates within their Kubernetes cluster, empowering them with comprehensive certificate management capabilities.

- [KUBE+ Overview](#)
- [KUBE+ Features](#)
- [Getting Started](#)
- [KUBE+ Deployment Architecture](#)
- [Visibility & Control](#)
- [Docker Image and Helm Chart Validation Using Cosign](#)
- [Visibility](#)
- [Dashboard - Insights](#)
- [Policy Enforcement](#)
- [Automate Certificate Lifecycle Management](#)
- [Secure Service Mesh with mTLS authentication](#)
- [Mesh Inventory](#)
- [Enable External Signing](#)
- [Integrating Istio with Custom CA](#)
- [Alerts and Logs](#)
- [Automation](#)
- [System Administration](#)
- [Notification Event](#)
- [Enabling Custom Workflow Integration](#)
- [Uninstall and Cleanup](#)
- [FAQ and Troubleshooting](#)

KUBE+ Overview

Simplify and Modernize Certificate Lifecycle Management (CLM) in Kubernetes


AppViewX KUBE+ is a comprehensive certificate lifecycle management solution for Kubernetes environments. It provides a central solution to discover, manage, automate, and govern certificates (or machine identities) across cloud-native containerized workloads and Kubernetes infrastructure. By bringing together visibility, automation, and policy-driven control, KUBE+ bakes security into the core of DevOps pipelines and Kubernetes management.

3 Steps to Bridge the Gap between Agility and Security in Kubernetes


1. Get Visibility into all SSL/TLS certificates across your Kubernetes environments.



2. Enforce PKI policies to ensure the use of compliant CAs and strong crypto-standards.



3. Automate end-to-end Certificate Lifecycle Management.



KUBE+ Features

AppViewX KUBE+ offers comprehensive lifecycle management of x.509 digital certificates across K8s clusters and container workloads. It comes equipped with a variety of features, including the following:

- **Visibility & Control:** This platform offers a unified solution for discovering, maintaining, and ensuring compliance of TLS certificates across Kubernetes clusters deployed in on-premises, cloud, or hybrid cloud environments.
- **Full TLS coverage on K8s:** Automated provisioning and management of TLS certificates used for Pod-to-Pod Communication (mTLS), Ingress Traffic, Ephemeral Pods and Self-Signed Kubernetes Infrastructure certificates.
- **Integrate with Enterprise PKI:** Seamlessly integrate with your enterprise's Public Key Infrastructure (PKI) to issue certificates from the customer's chosen Public or Private Certificate Authority (CA).

- **High Availability & Resiliency:** PKI that is always available with Offline CA issuance.
- **Business Continuity:** Use workflow orchestration to simplify and streamline the process of issuing Enterprise PKI certificates.
- **Ecosystem:** A single, unified platform that integrates CA, Vault, TLS keystores, ITSM, the K8s platform, and DevOps Tools.
- **Governance:** Enable full control and auditing of the certificate issuance process for certificates managed across Kubernetes infrastructure.

Getting Started

Know your Deployments for KUBE+

We offer flexible deployment options for the AppViewX Platform, which enables the KUBE+ capability, to meet diverse customer requirements and infrastructure preferences, including On-Premises environments, Managed Kubernetes platforms like EKS, AKS, GKE, and OpenShift, as well as Software as a Service (SaaS).

SaaS Deployment (Highly Secure and Hassle-Free)

Our Software as a Service (SaaS) offering is designed for organizations that prioritize security, simplicity, and efficiency. In this deployment mode, we manage all aspects of application hosting, maintenance, and scaling, providing a worry-free experience for our customers. Our SaaS platform is built with cutting-edge security measures, including robust encryption, multi-factor authentication, and continuous monitoring to ensure your data and operations are protected at all times.



Choosing SaaS not only reduces the burden on your IT teams but also ensures that you benefit from the latest updates, features, and security enhancements without any additional effort. This option is ideal for organizations of all sizes, particularly those looking to quickly access our services with the assurance of enterprise-grade security and compliance.

[For additional information about saas deployment, click here.](#)

On-Premises Deployment

On-Premises deployment enables organizations to install and operate our applications on their own infrastructure. This approach offers the highest level of control and customization, making it particularly suitable for organizations with strict security, compliance, or performance needs. It is best suited for enterprises with dedicated IT resources and the expertise to manage complex infrastructure. [For additional information about on-premises deployment, click here.](#)



Managed Kubernetes Deployment (AKS, EKS, and GKE)

We offer support for deployment on Managed Kubernetes services such as Amazon EKS, Microsoft AKS, and Google GKE. Managed Kubernetes platforms simplify the management of Kubernetes clusters by handling tasks like cluster provisioning, maintenance, and scaling. This deployment option is suitable for organizations looking for a balance between control and operational simplicity, and for those who prefer leveraging cloud providers' infrastructure and expertise. [For additional information about managed kubernetes deployment, click here.](#)



KUBE+ Deployment Architecture

- [Overview](#)
- [KUBE+](#)
- [Cert Orchestrator](#)
- [Communication Flow](#)
- [Authentication and Access Control](#)

Overview

AppViewX KUBE+ consists of a control plane and a set of in-cluster components, designed on a microservice architecture and deployed as a container workload. The control plane is equipped with the ability to gain valuable insights into SSL/TLS certificates throughout K8s clusters and enforce PKI policies for these clusters. Meanwhile, the in-cluster components handle the automated lifecycle management of x.509 digital certificates for K8s clusters and container workloads.

- **KUBE+**: As a control plane feature, KUBE+ serves as a centralized hub, empowering users to effortlessly discover, manage, and automate certificate issuance via a robust policy-driven approach.
- **Cert-Orchestrator**: The primary component of KUBE+ which is deployed within a Kubernetes cluster and is responsible for managing the lifecycle of certificates.

KUBE+

AppViewX KUBE+ is a powerful control plane that offers centralized visibility and management for certificates across Kubernetes and container workloads through its integrated components. With KUBE+, you can maintain up-to-date certificate inventories, track certificate chain of trust, locations, expiration dates, and crypto standards.

The platform enables you to establish and enforce enterprise-wide PKI policies and role-based access controls, providing enhanced security. KUBE+ also facilitates easy audits and compliance validation with comprehensive reporting and logging functionalities.

Moreover, the seamless integration with both public trust and private trust Certificate Authorities (CAs) simplifies the management of the entire certificate lifecycle, ensuring a smooth and efficient process.


Cert Orchestrator

Cert-Orchestrator is a Kubernetes cryptomesh that utilizes a microservice architecture and is deployed as a container workload. Its purpose is to facilitate the implementation of KUBE+ across workloads and hosted clusters.

Users have the option to deploy and integrate the cert orchestrator with AppViewX KUBE+. This enables the full range of Crypto Mesh features, or specific features can be selectively implemented depending on the use case. The cert-orchestrator comprises several sub-components that enable the KUBE+ solution:

- **Cert-orchestrator controller**: The primary component of KUBE+ is deployed to enable end-to-end certificate lifecycle management, including discovery, enrollment, and renewal.
- **AppViewX-Signer**: The KUBE+ component is deployed together with Cert-orchestrator to manage certificates within Istio Service Mesh.


- **AppViewX-CSI:** The KUBE+ component is deployed along with Cert-orchestrator to manage certificates within ephemeral volumes of pods.
- **AppViewX-Infra-orchestrator:** The KUBE+ component, deployed as a daemon set along with Cert-orchestrator, enables certificate lifecycle management for the Kubernetes infrastructure or control plane, including certificate discovery and enrollment from external public or private CAs.

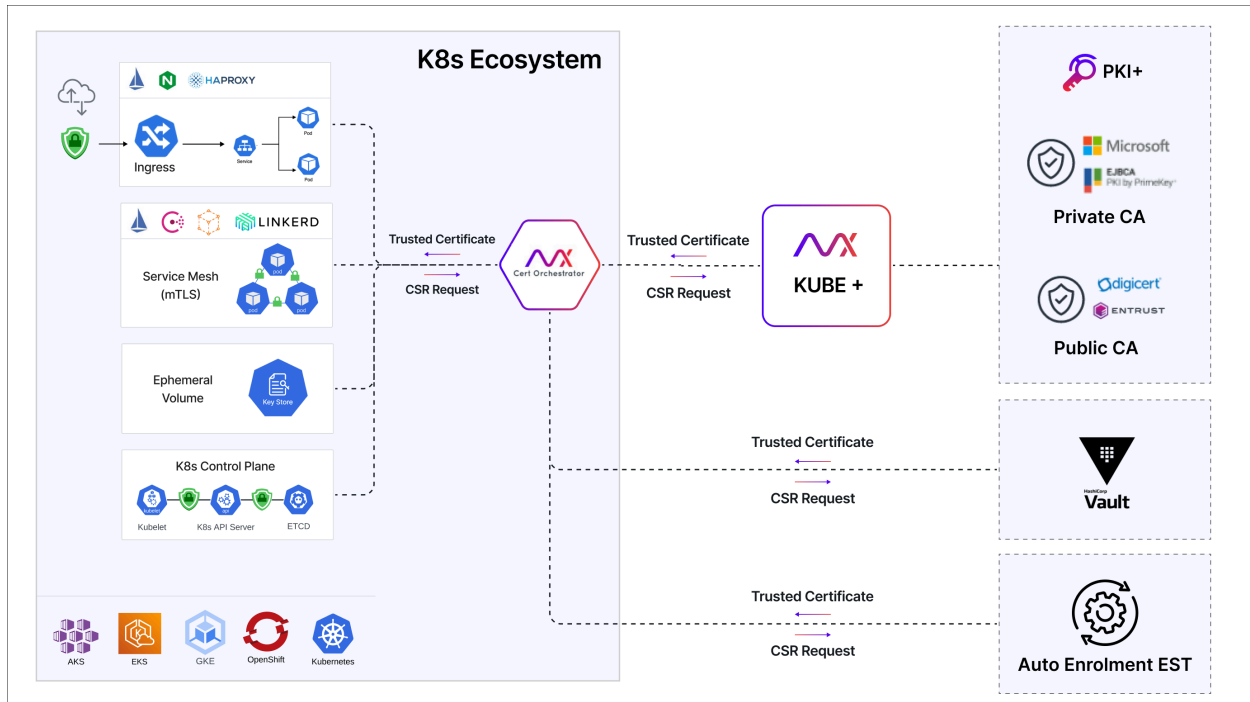

Communication Flow

Cert-orchestrator and AppViewX KUBE+ primarily communicate through REST API-based communication to facilitate end-to-end certificate lifecycle management operations.

The communication between the subcomponents of the cert-orchestrator and AppViewX KUBE+ for their respective business logic is enabled and routed through the cert-orchestrator controller. The cert-orchestrator serves as the control plane for the end-to-end certificate lifecycle management operations, which means that any outgoing communication from the Kubernetes cluster to AppViewX KUBE+ is only routed through the primary controller.

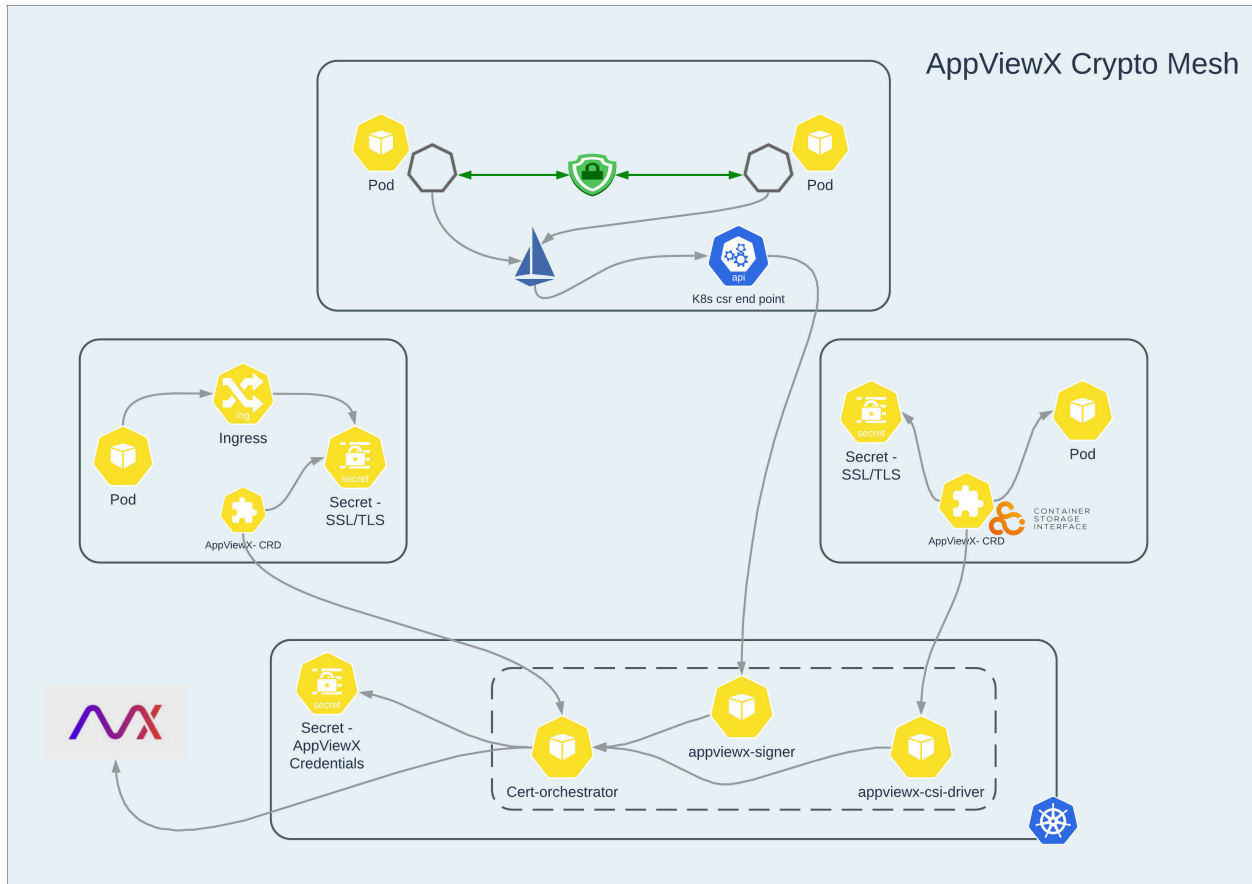

Authentication and Access Control

The communication between the K8s cluster and AppViewX KUBE+ takes place through a REST API, and it is authenticated. AppViewX provides several authentication modes to access its API.

Authentication

- Basic Authentication:** AppViewX offers multiple modes of authentication for accessing its API. Users can create a dedicated user for authentication, either an external user (LDAP, RADIUS and TACACS) or an internal user created in AppViewX. For more information on Basic Authentication, refer to [Platform User guide](#).
- OAuth 2.0 (Service Account):** Users have the option to create a service account that is enabled through AppViewX OAuth 2.0. They can then obtain the client ID and client secret from the service account, which can be used for authentication purposes. Once the ClientID and ClientSecret are configured in cert-orchestrator, they will be used for authentication. If the existing ClientSecret expires,

cert-orchestrator will renew it by using the current ClientID and ClientSecret. The new ClientSecret will then be stored and used for subsequent authentication with AppViewX. For more information on OAuth 2.0, refer to [Platform User guide](#).

Access Control

Specific permissions to access modules and carry out tasks within each AppViewX module are assigned by each role. Roles are exclusively assigned to user groups. Any user groups assigned to a role will automatically inherit all the associated permissions. User groups can also be assigned more than one role.

KUBE+ simplifies role-based access control by providing Out Of the Box (OOB) roles for KUBE+ features. These predefined roles can be cloned, enabled, or disabled, but not updated or deleted. For more granular control, administrators can create custom roles, which can be fully managed (updated, deleted, enabled, and disabled). Users can then be assigned either OOB roles or custom roles to align with their specific permissions, streamlining the management of user access and permissions for various personas within KUBE+.

KUBE-Application-User: For DevOps/Application users/CloudOps teams to perform Certificate Lifecycle Management for their applications (or) business units.

KUBE-PKI-Administrator: For Infosec and PKI teams to define and enforce PKI policies for their Kubernetes environments.

KUBE-cert-orchestrator: Role to be mapped to the service account or user used for deployment of Cert-Orchestrator for performing CLM operations on individual Kubernetes clusters.

As previously explained, when deploying Cert-Orchestrator within the Kubernetes cluster for access control, it's necessary to follow these steps:

1. Create a user or service account and associate it with the User Group.
2. Assign the KUBE-cert-orchestrator role to the User Group.
3. Additionally, ensure that the super access resource is linked to the User Group.
4. Ensure MFA (Multi Factor Authentication) is disabled for this user since it is used for API access.



Note: When a user onboards the cluster using Easy Onboarding and selects "Download Credentials," the KUBE+ platform automatically performs steps 1 through 3. This includes creating the OAuth service account, mapping the default KUBE service user group, the OOB KUBE cert-orchestrator, and the super access resource.

For detailed instructions to perform any actions on role, see [Platform User Guide](#).

Visibility & Control

- [Overview](#)
- [Prerequisites to Onboard a Cluster](#)
- [Cluster Inventory](#)

Overview

To ensure security and prevent outages, Infosec and PKI teams need complete visibility into all certificates across Kubernetes environments. This eliminates security blindspots. To provide this visibility using KUBE+, DevOps/CloudOps teams must follow a specific process.

1. **Onboard Cluster** - Install AppViewX KUBE+ component in the targeted cluster.
2. **Manage Cluster** - Deploy cert-orchestrator with the feature gate to discover certificates and manage the cluster in the inventory.
3. **Visibility & Insights** - The certificates discovered from these managed clusters can be visualized in the inventory and dashboards for assessing the security risks.

Prerequisites to Onboard a Cluster

The cert-orchestrator runs as a container workload on the same Kubernetes infrastructure that hosts the workloads that need certificates.

To begin the deployment process, the following prerequisites must be met and verified:

- Cluster Running Kubernetes version 1.22 and above; OpenShift version 4.10, 4.11 or 4.12.
- Docker version 20.x installed and running as the container runtime.
- Containerd running if the cluster does not support docker runtime.
- Access to either an on-premise AppViewX KUBE+ instance or a subscribed AppViewX SaaS instance.
- Helm and kubectl packages installed in the Kubernetes cluster.

- In the case of a bastion host, the bastion host should be connected to the cluster.
- Access to the helm and docker image repositories.



Note: Contact AppViewX support to obtain the steps to pull the images and charts from the Docker and Helm Repository.

Cluster Inventory

The Cluster Inventory allows users to obtain the deployment configuration of cert-orchestrator for the targeted cluster. After executing this configuration on the targeted cluster, the cluster is added to the inventory, enabling cluster management from within the inventory.

The Cluster Inventory list displays the clusters where the cert-orchestrator is installed. On the Cluster Inventory page, you can:

- refresh the list, click the  (**refresh**) icon.
- go to the pages, click the  (**navigation**) icon.
- discover the cluster objects for the selected clusters and extracts the certificates, click the  (**config fetch**) icon. Config fetch can be triggered in 15 minutes interval.

The cluster inventory list includes the following information:

Column and Description Table

Column Name	Description
Cluster Name	Name of the Kubernetes cluster and metadata about the cluster retrieved on clicking the name of the cluster. The cluster name contains the vendor name, cluster name, account ID and region for the unique identity.
Vendor	The Kubernetes Cluster Provider.

Column and Description Table (continued)

Column Name	Description
Onboarding Type	Kubernetes clusters can be managed in two ways: • Agent-based: This involves deploying an agent on the cluster. • Agentless: This method does not require any agents and the feature will be available soon.
No. of Nodes	Count of nodes in the cluster.
State	State of the Cluster for CLM operations. Possible Options: Managed (CLM operations can be performed) and Unmanaged (CLM operations cannot be performed).
Status	Health of the cert-orchestrator in the cluster. An event can be configured to send a notification when the cluster status changes to unhealthy. To configure an event, see Configuring Notification Event .
Last Updated Time	Timestamp of the most recent health check update.
Created By	The user who generated the deployment configuration.
Actions	Actions icon allows updating the deployment configuration for the Cluster.

- [Onboarding a Cluster](#)
- [Viewing Cluster Details](#)
- [Managing a Cluster](#)
- [Unmanaging a Cluster](#)
- [Modifying Cluster](#)
- [Deleting a Cluster](#)

Onboarding a Cluster

Connect Cluster allows you to get the cluster's deployment configuration for deploying and managing the cert-orchestrator from AppViewX KUBE+.

Generating a deployment configuration for the cluster involves initiating the generation of deployment templates or configuration steps. KUBE+ allows DevOps teams or cluster administrators multiple ways to onboard Kubernetes clusters into your inventory, catering to different environments and operational needs. Choose the method that best suits your setup:

- **Generic Onboarding** – A universal deployment template for onboarding clusters across any Kubernetes vendor.
- **Marketplace [AWS EKS Addon]** – A certified AWS Marketplace integration to seamlessly onboard Amazon EKS clusters via KUBE+ EKS Add-on.
- **Agentless [Cloud Account] (Coming Soon)** – Discover and onboard clusters directly via cloud accounts without installing an agent.
- [Generic Onboarding](#)
- [Deployment Prerequisites for Ephemeral Volume Feature Gate](#)
- [Marketplace \[AWS EKS Addon\]](#)

Generic Onboarding

This method generates a common deployment template that can be applied across multiple Kubernetes vendors, making it a flexible choice for organizations with a diverse cluster landscape

- **Easy onboarding:** - Enables DevOps team to generate a common deployment template for onboarding multiple clusters.
- **Advanced onboarding** - Enables individual cluster administrators to generate cluster specific deployment configuration.
- [Onboarding a Cluster - Easy Method](#)
- [Onboarding a Cluster - Advanced](#)

Onboarding a Cluster - Easy Method

Deploy and manage cert-orchestrator on multiple Kubernetes clusters using a common deployment configuration.

The common deployment template enables the DevOps team to generate a generic command that can be executed at multiple clusters where these commands just need Cluster Name and Vendor name to be changed accordingly while executed in the respective clusters.

A credential will be generated with a default user group associated to the OOB role and resource which is downloadable as a YAML and the object type is a Kubernetes secret. The credential can be changed by editing the cluster once it's successfully managed in the inventory.

Additionally, the common deployment configuration enables default services, including discovery of certificates and provisioning of certificates from the Kubernetes cluster. Administrator can modify the services after managing the cluster in the cluster inventory.

If the on-boarding policy is enabled, new clusters will be onboarded with automated policy and PKI configuration. To configure on-boarding policy, follow the [Configuring Policy Settings](#) steps.

To obtain the common deployment template for Kubernetes cluster:

1. Go to **menu > KUBE+ > INVENTORY > Cluster Inventory**.
2. Click **Connect Cluster** on the menu bar.
3. On the **Onboard Cluster** popup window, select **Get Started** under **Generic Onboarding**.
4. Select **Get Started** under **Easy Onboarding**.
5. On the **Cluster Easy Onboard** page, enter values in the form fields to generate the deployment/installation command. Details on the mapping of each field are provided in the table below:

Generating Helm Command - Fields and Description Table

Field	Description
Cluster Details	
Enter Cluster Name*	Enter a unique cluster name in the format of FQDN. Example: my-cluster.net.
Vendor*	Select the K8s vendor where the cert orchestrator is deployed from the dropdown list. The options are: • EKS • AKS

Field	Description
	• GKE • OpenShift • Self-Managed
*: Mandatory fields	

6. Click **Generate Installation Command** to get the Helm command in the Commands field.



Note:

- To see the commands in the full screen view, click the  (**Expand**) icon.
- To copy the command, click  (**Copy**) icon.

7. Click **Download Credentials** to download the credentials of your AppViewX environment. Once deployed in the cluster, this credentials enables connectivity between the Kubernetes cluster and AppViewX environment from the cert-orchestrator deployed in the Kubernetes cluster.



Note:

- The downloaded credential creates a default OAuth svc account in AppViewX named **kube-svc-account** with a client ID and client secret.
- The **kube-svc-account** is linked to a default user group named **kube-svc-usergroup**, which, in turn, is associated with the OOB **kube-cert-orchestrator** role and super access resource.
- The downloaded credential includes the connectivity URL, serving as the AppViewX login URL.
- After successful onboarding and managing the cluster in the cluster inventory, the user or admin with access to the inventory can edit the cluster.

Onboarding a Cluster - Advanced

Deploy and manage cert-orchestrator on Kubernetes clusters by customizing installation commands and choosing specific services.

The advanced onboarding enables the DevOps team/cluster administrators to generate a specific install command that can be executed at the clusters, administrators or DevOps team can modify the namespace, connectivity URL and KUBE+ services to be deployed in the cluster.

To obtain cert-orchestrator deployment configuration for the respective Kubernetes cluster:

1. Go to **menu > KUBE+ > Inventory > Cluster Inventory**.
2. Click **Connect Cluster** on the menu bar.
3. Select **Get Started** under **Advanced Onboarding**.
4. On the **Cluster Easy Onboard** page, enter values in the form fields to generate the deployment/ installation command. Details on the mapping of each field are provided in the table below:

Generating Helm Command - Fields and Description Table

Field	Description
Cluster and Connectivity Details	
Enter Cluster Name*	Enter a unique cluster name in the format of FQDN. Example: my-cluster.net.
Vendor*	Select the K8s vendor where the cert orchestrator is deployed from the dropdown list. The options are: • EKS • AKS • GKE • OpenShift • Self-Managed
Connect To*	Select one of the following options to establish a connection between the cert-orchestrator

Field	Description
	and AppViewX across different AppViewX deployment scenarios: • AppViewX URL - For on-prem deployment, select this option. • Cloud Connector URL - For cloud SaaS deployment, select this option.
URL*	Enter the URL based on the Connect To type (onprem/cloud connector).
Credential Type*	Select one of the following credential types for integrating the cert-orchestrator with AppViewX: • Basic Authentication • OAuth2.0
Username*	This option is applicable for the Basic Authentication of the Credential Type and will auto populate the list of users from the user inventory. Select the required user to be used for authentication.  Note: In this mode, only users created within the AppViewX database or on boarded via AAA (LDAP, RADIUS, TACACS) are supported. SSO credentials cannot be used for API authentication. It is recommended to use OAuth 2.0 for authentication instead.
Crypto Mesh Details	
Namespace*	Enter the Namespace where the cert-orchestrator is to be deployed. It is recommended to install in the crypto-mesh namespace.

Field	Description
Features*	Select the list of feature gates to be enabled/disabled in the cert-orchestrator deployment configuration for the cluster.
Certification Group*	Select the certificate group to onboard certificates: • Auto Create Group - This option enables Auto creation of Certificate Groups in AppViewX with the Group Name as the Namespace Name. • Use Existing - This option allows you to choose the existing certificate group. If you choose this option, select a group from the Select Group dropdown menu. .
Enable Private Key Discovery*	Set the value to “True”, if you want to discover the private keys from the Kubernetes secrets.

5. Click **Generate Installation Command** to get the Helm command in the Commands field.



Note:

- To see the commands in the full screen view, click the  (**Expand**) icon.
- To copy the command, click  (**Copy**) icon.

6. Click **Finish**.

Execute the copied installation commands sequentially on your Kubernetes cluster where the cert orchestrator is to be deployed.



Note:

- Upon clicking **Finish**, the deployment generated for the cluster will not appear in the cluster inventory until the cert-orchestrator is successfully deployed within the cluster.
- If a connection required from the cluster to AppViewX via a proxy, you can set the proxy environment variables in a **ConfigMap** or **Secret**:
 - **Using a ConfigMap**: If you want to use a **ConfigMap** to specify proxy settings, you can pass the `--set certOrchestrator.envConfigMapName=myconfig` flag in the Helm command.

Sample ConfigMap:

```
apiVersion: v1

kind: ConfigMap

metadata:

  name: myconfig

  namespace: crypto-mesh

data:

  http_proxy: "http://MY_PROXY:MY_PROXY_IP"

  https_proxy: "http://MY_PROXY:MY_PROXY_IP"

  # no_proxy: "svc,local"
```

- **Using a Secret:** If you prefer to use a **Secret** (especially if the proxy credentials need to be stored securely), you can pass the `--set certOrchestrator.envSecretName=mysecret` flag in the Helm command.

Sample secret:

```
apiVersion: v1

kind: Secret

metadata:
  name: proxy-config
  namespace: default

type: Opaque

data:

  http_proxy: aHR0cDovLzEyNy4wLjAuMT04MDgw # Base64 encoded value of "<http://127.0.0.1:8080>"
  https_proxy: aHR0cHM6Ly8xMjc0MC4wLjE6ODA4MA== # Base64 encoded value of "<https://127.0.0.1:8080>"
  no_proxy: MTI3LjAuMC4xLzE6ODAwMA== # Base64 encoded value of "127.0.0.1,localhost"
```


To verify if the cert-orchestrator is deployed and functioning as expected, execute the following command:

```
kubect! get pods --all -n crypto-mesh
```



Note: The initial status of the cert-orchestrator pod will be in 1/2 running state and the state will be changed to 2/2 upon approval/moving the cluster to managed state in the Cluster inventory.

- Expected status is for the pods to be in running status with 1/2 state.
- In case of any issues or logs to be collected or verified, execute **kubect! logs -f <cert-orchestrator-podname> -n crypto-mesh**.
- Ensure to review the deployment prerequisites for ephemeral volume if the Ephemeral Volume use case is selected.

Deployment Prerequisites for Ephemeral Volume Feature Gate

Enabling the feature gate "Provision Certificates to Ephemeral Volumes" for certificate provisioning into pod volumes will require the activation of a CSI driver feature within the cluster where the cert orchestrator is deployed.

To enable the CSI provider:

1. Add the CSI provider helm repository to the Kubernetes cluster by using the command: `helm repo add secrets-store-csi-driver https://kubernetes-sigs.github.io/secrets-store-csi-driver/charts`.
2. Install the CSI provider drive in the Kubernetes cluster by using the command `helm install csi secrets-store-csi-driver/secrets-store-csi-driver --namespace crypto-mesh --set syncSecret.enabled=true --set enableSecretRotation=true --set rotationPollInterval=5m`.

**Note:**

- The value of `RotationPollInterval` can be configured to set the time interval at which the CSI driver makes a call to `appviewx-csi-provider` for synchronizing the certificate content from secret to pod volume.
- If the CSI provider driver already existed prior to the installation of the crypto mesh, you can skip this step.
- For CSI feature, in case of any issues or logs to be collected or verified execute **`kubectl logs -f <appviewx-csi-provider-podname> -n crypto-mesh`**.

• OpenShift Security Permissions

OpenShift Security Permissions

For deploying the AppViewX CSI feature in OpenShift environments, the following elevated privileges are required. To execute the prerequisites, Contact OpenShift Administrator.

1. After deploying the `appviewx-csi-provider` in an OpenShift cluster, patch the `DaemonSet` for the AppViewX CSI Provider to run with a privileged security context. `kubectl patch daemonset appviewx-csi-provider --type=json -p '{"op": "add", "path": "/spec/template/spec/containers/0/securityContext", "value": {"privileged": true}}'`.
2. Add the security account for the Secret Store CSI Driver and AppViewX CSI Provider to the privileged security context constraint. To obtain the name of the service account associated with the AppViewX CSI provider, run the command `oc get sa -n crypto-mesh`, and copy the relevant name to be used in the command below: `oc adm policy add-scc-to-user privileged system:serviceaccount:crypto-mesh:secrets-store-csi-driver oc adm policy add-scc-to-user privileged system:serviceaccount:crypto-mesh:<replace with service account name>`.
3. Give additional access to the application for retrieving secrets with the AppViewX CSI Provider. Create a **SecurityContextConstraint** to **allowHostDirVolumePlugin** and **allowHostPorts** for the service account of the application.

```
cat > application-scc.yaml << EOF
apiVersion: security.openshift.io/v1
kind: SecurityContextConstraints
```

```

metadata:
  name: appviewx-csi-provider
allowPrivilegedContainer: false
allowHostDirVolumePlugin: true
allowHostNetwork: true
allowHostPorts: true
allowHostIPC: false
allowHostPID: false
readOnlyRootFilesystem: false
defaultAddCapabilities:
- SYS_ADMIN
runAsUser:
  type: RunAsAny
seLinuxContext:
  type: RunAsAny
fsGroup:
  type: RunAsAny
users:
- system:serviceaccount:crypto-mesh:<replace with service account name>
EOF
Kubectl apply -f application-scc.yaml

```

Marketplace [AWS EKS Addon]

The EKS Addon is an AWS Marketplace integration that allows seamless onboarding of Amazon EKS clusters using KUBE+ EKS Add-on. This method ensures compliance with AWS's certified deployment process.

For detailed step-by-step instructions, refer to [KUBE+ as an EKS Addon - AWS Marketplace](#).

Viewing Cluster Details

The Cluster Inventory lists all clusters that have been successfully onboarded. Cluster details are available for viewing within the Cluster Inventory.

To view cluster details:

1. Go to **menu > KUBE+ > Inventory > Cluster Inventory**.
2. Click the cluster name link in the Cluster Name column.

The following cluster details are displayed:

Cluster Details - Field and Description

Field	Description
Cluster Name	Unique name of the cluster.
Cluster Status	Status of the cluster.
Available Namespaces	Namespaces available within the cluster.
No. of Pods	Count of pods.
Connectivity URL	URL used for a connection between the cert-orchestrator and AppViewX.
Auth Secret Name	Authentication secret name that contains the authentication information.
Secret Namespace	Secret associated with a namespace.
Current Nodes	Current node of the cluster,

Discovery Exclusion Settings - Field and Description

Field	Description
Namespace Exclusion	Namespaces that are excluded from certificate discovery.
Namespaces Excluded Count	Number of namespaces that are not included when certificates are discovered.
Manage Namespace Exclusions	Status of Namespaces (Included or Excluded) and List of Namespaces

Managing a Cluster

The cluster's information will be automatically added to the Cluster Inventory in a **Pending Approval** state after the cert-orchestrator is successfully installed on the desired cluster. CLM operations on the Kubernetes cluster where the cert-orchestrator is deployed will only be permitted when the cluster is in **Managed State**.

To change the cluster status to Managed:

1. Go to **menu > KUBE+ > Inventory > Cluster Inventory**.
2. Select a preferred cluster(s), and then click **Manage**.



Note: To enable the automatic transition of clusters into a managed state, administrators can set the 'Cluster Auto Approval Policy' to **True** by navigating to **menu > KUBE+ > System Administration > Cluster Settings**.

The cluster's status will take some time to update to Managed.

Related information
[Unmanaging a Cluster](#)

Unmanaging a Cluster

A cluster that is already managed in the Cluster Inventory can be removed from management to apply CLM restrictions.

To unmanage a cluster:

1. Go to **menu > KUBE+ > Inventory > Cluster Inventory**.
2. Select a managed cluster.
3. Click **Unmanage** on the menu bar.

The cluster's status may take some time to change to Unmanaged.

Related information
[Managing a Cluster](#)

Modifying Cluster

The cluster details and feature gates can be adjusted after the cert-orchestrator has been successfully deployed to the cluster.

To modify cluster details:

1. Go to **menu > KUBE+ > Inventory > Cluster Inventory**.
2. Click the  (**edit**) icon in the **Actions** column of the cluster row.
3. On the **Cluster Upgrade** page, update the following details as needed:

- In the **Update Cert Orchestrator** section:
 - **Modify Feature Gates** : Cluster administrators can modify feature gates to enable or disable specific services within the cluster.
 - **Manage AppViewX Connection Settings** : Modify the service account linked to the cluster, enable or disable private key discovery, and change the AppViewX URL.

**Note:**

If the AppViewX URL or service account credentials are updated, the cluster administrator can download the new credentials as a YAML file and apply them to the cluster.

- Click **Generate Update Command** to get the updated deployment configuration.
 - Copy and execute the install command in the desired cluster.
 - In the **Discovery Exclusion Settings** section:
 - **Namespace Exclusion** - View the namespaces selected for exclusion from certificate discovery.
 - **Namespaces Excluded Count** - View the number of namespaces excluded from certificate discovery.
 - **Manage Namespace Exclusions** - A list of namespaces is displayed along with their status (Excluded or Included). Select a namespace and click  to update its status.
4. Click **Update** or **Reset** to restore the previous configuration changes associated to the cluster.

Deleting a Cluster

If a user decides to limit or remove CLM actions on a specific cluster, they have the option to delete it from the inventory.

To delete a cluster:

1. Go to **menu > KUBE+ > Inventory > Cluster Inventory**.
2. Select the designated cluster, regardless of whether it is in a Managed or Unmanaged state.
3. Click **Delete** on the menu bar.

**Note:**

- Deleting clusters from the inventory will not remove the in-cluster KUBE+ components. Users are required to follow the [Uninstall and Clean Up](#) steps within the cluster to complete the removal process.
- If off-boarding policy is enabled, the cluster and its associated components will be removed from the AppViewX inventory as configured. To configure the off-boarding policy, follow the [Configuring Policy Settings](#) steps.

4. On the **Delete Cluster** pop-up window, enter the comment and click **Yes**.

Once you confirm that you want to delete the cluster, its status will change to "Delete in progress." Deleting a cluster from the inventory takes some time. If you attempt to delete the cluster again while the deletion is in progress, you'll receive the following error message: "Selected Clusters are recently offboard triggered."

Docker Image and Helm Chart Validation Using Cosign

Prerequisites: Install the latest version of `cosign` as described in the [AppViewX SIGN+ Guide](#).

Validate a Docker Image

1. Download the Image Key file (<image-name>.pub) from [AppViewX release portal](#) respective release version.



Note: To get the release portal credentials, contact help@appviewx.com.

2. Validate the Image Using following command:

```
cosign verify --key <Image Key file> <Image uri>
```

Example: `cosign verify --key my-app-image-key.pub registry.example.com/appviewx/my-service@sha256:abc123...`

Validate a Helm Chart

1. Download the helm chart signature file (.sig) from release portal.
2. Add the repo to your local Helm configuration using the following command:

```
helm repo add crypto-mesh --username <your username> --password <your password or access token> <helm repo URL>
```

3. Update your local Helm repo cache using the following command:

```
helm repo update
```

4. Pull a specific version of a chart using the following command:

```
helm pull <repo-name>/<chart-name> --version <version of the chart>
```

This downloads the helm chart as <chartname>.tgz file

5. Validate the helm chart using following command:

```
cosign verify-blob --key <keyfile> --signature <Helm chart signature file .sig> <CHART_TGZ file>
```

Visibility

After installing cert-orchestrator on the designated cluster and enabling the certificate discovery feature, AppViewX will create an inventory of Kubernetes certificates found across all your Kubernetes clusters. This centralized view allows you to proactively manage all your certificates.

Managing Certificate Groups for Kubernetes Clusters

When the Discovery Feature Gate is enabled with the Auto Create Certificate Groups option (enabled by default), the platform automatically organizes certificates based on Kubernetes clusters and namespaces. This feature helps in efficiently managing Kubernetes certificates by automatically grouping them under a structured hierarchy, ensuring better organization and access control.

Cluster-Based Grouping:

- The platform creates a **certificate group for each discovered Kubernetes cluster**.

Namespace-Based Grouping:

- Within each cluster group, **namespace-specific certificate groups** are automatically created.
- These namespace groups act as **child groups** under their respective Kubernetes cluster group.

Parent Group for Kubernetes Certificates:


- All Kubernetes-related certificate groups are mapped under a **Parent Group called "Kube Plus Group"**.
- This ensures clear **segregation** between **Kubernetes certificates** and **other certificates**.

Key Benefits

- Automatic Organization** – No need for manual certificate group creation; Kubernetes certificates are **automatically structured**.
- Fine-Grained Access Control** – Admins can **assign permissions** at the cluster and namespace levels, ensuring secure access management.
- Simplified Certificate Management** – Certificates are categorized in a logical structure, making them easier to locate and manage.

Certificate Endpoint View – Understanding Where Certificates Are Used


Inventory View: The Certificate Endpoint View feature allows users to identify where a certificate is used within a Kubernetes environment. By enabling **Kube Attributes** in the inventory view, users can see detailed information about the certificate’s usage across clusters, namespaces, and Kubernetes objects. This feature helps in troubleshooting, auditing, and managing certificates effectively.

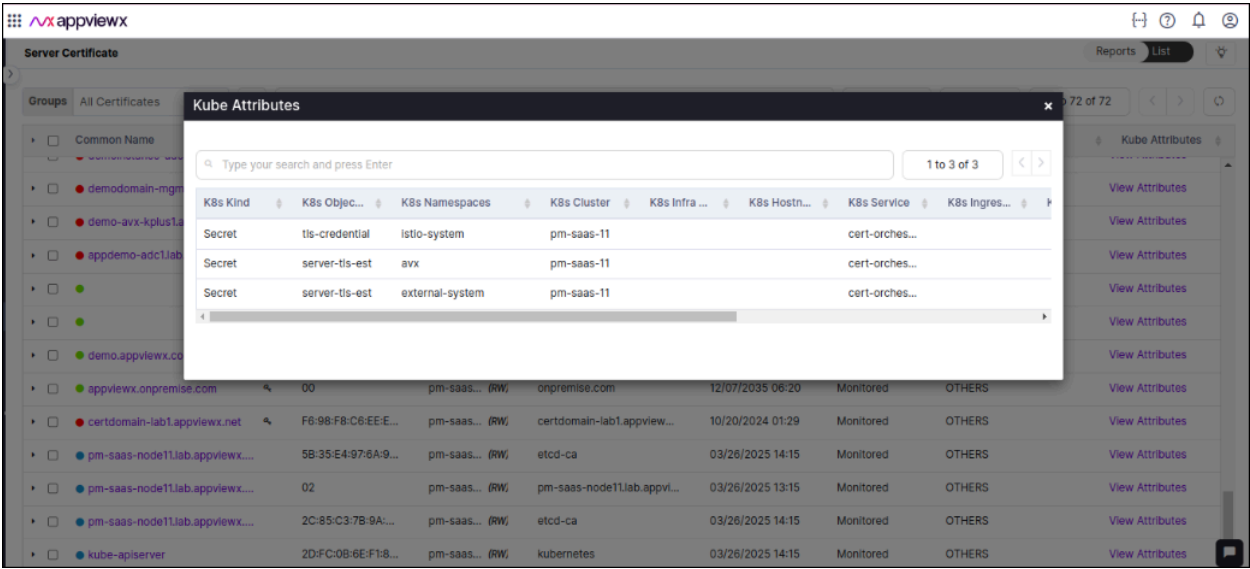

Holistic View

The certificate details and connector actions can be viewed by clicking on the common name of the certificate in the certificate inventory.

- For certificates found in Kubernetes Secrets, the connector name will start with the prefix "Secret".
- For certificates discovered through Routes, the connector name will start with the prefix "Route."
- For certificates discovered from configmap objects, the connector name will start with the prefix "configmap".

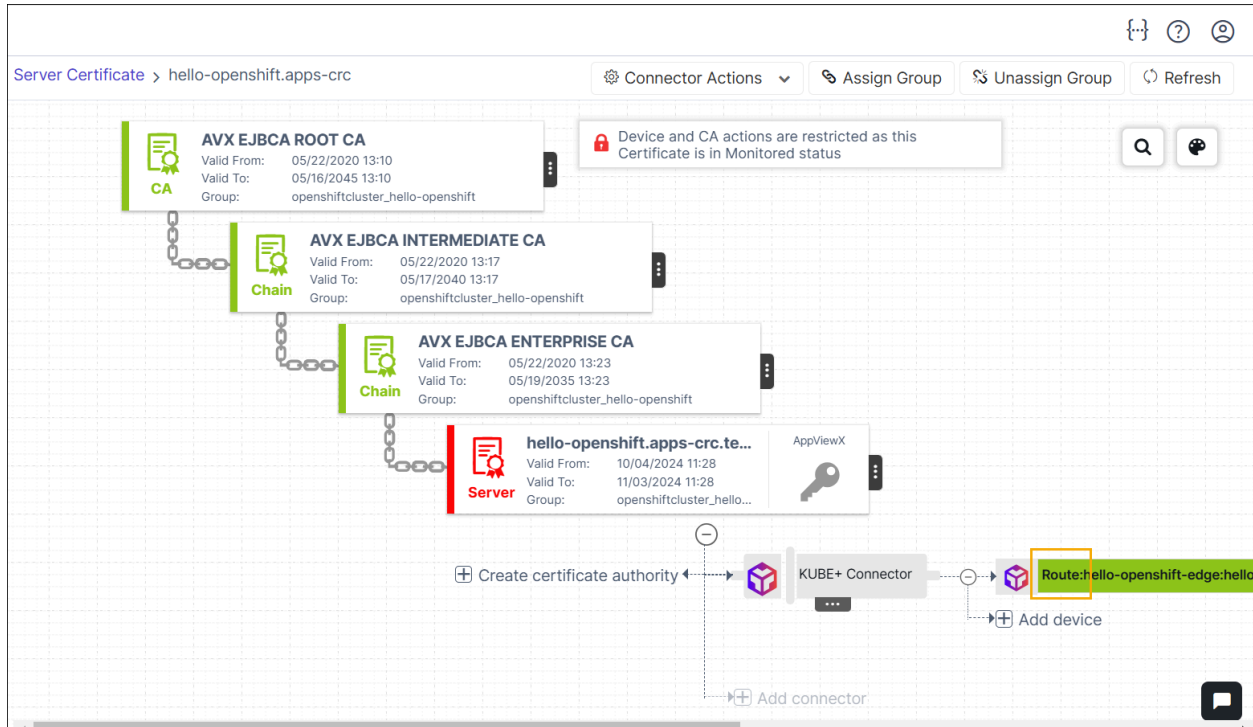

The Certificate Inventory, where certificates discovered from Kubernetes clusters are managed, is further classified into:

1. **Ingress** certificates - Certificates which are used by Ingress controllers.
2. **Infrastructure certificates** - Certificate discovered from Kubernetes control plane components.
3. **Service Mesh** - Certificates which are enrolled from AppViewX for Service Mesh for mTLS authentications.
4. **Others** - Certificates which are not of any of the above 3 classifications will be classified as Others.



Note: To see all certificates across all categories, use the "All" option.

- [Server](#)
- [Client](#)
- [Trust Store](#)

Server

Server certificate inventory is where all the server certificates with the ECU (Extended/enhanced Key Usage) Server authentication will be present.

In this release, renewals and regenerations of the server certificates are only supported through the Cert-Orchestrator, which is part of the in-cluster component of KUBE+.

To go to Server certificate inventory page, go to **menu > KUBE+ > VISIBILITY > Server**.

The following table describes the options available on the Server Certificate inventory page:


Options available on the Server Certificate page

Options	Description
	Allows you to switch between the view by clicking the toggle button.
Groups	Expanding this dropdown displays the certificate groups and the number of certificates in each group. Selecting a group will display the filtered list of certificates.
Filter Summary	Displays the status of certificates according to expiry, compliance, validity, and so on.
Advanced Search	Allows you to perform a quick search for specific data. Clicking on the search bar dropdown opens the Advanced Search window.

Options available on the Server Certificate page (continued)

Options	Description
	To find the preferred server certificate, perform any of the following: 1. Choose the CAs from the Certificate Authority dropdown menu. 2. Enter the desired search terms in the Common Name, Serial Number, or Issuer Common Name field. 3. Select a certificate attribute from the dropdown list and if required add more certificate attributes to the search criteria by clicking the Add Certificate Attribute. 4. Click Search. The matching server certificates are displayed on the Server Certificate page.
Actions	Displays the list of actions you can perform on the certificates. • Export Certificates • Download Certificates • Delete • Change Status • Assign Group • Unassign Group • Add/Modify Comments • Certificate Attributes

Options available on the Server Certificate page (continued)

Options	Description
	• Renew Certificate • Revoke Certificate • CA Switch • Revocation Check
Columns	Allows you to select the columns to be displayed on the Server Certificate inventory page.
Number of Rows per Page	Hover the mouse over the number of row displayed on the page, the Show popup opens and choose the no. of rows to be displayed on the page.
	Allows to switch between the certificate inventory pages.
	Allows to refresh the certificate inventory data.

The Server Certificate inventory list includes the following information:

Column and Description Table

Column Name	Description
Common Name	The common name of the certificate.
Discovery Source	The source from which a certificate management system discovers and retrieves information about certificates
Serial Number	A unique identifier assigned to the certificate by the CA during the issuance process.
Group	The certificate group name.
Issuer Common Name	Issuer name of the certificate.

Column and Description Table (continued)

Column Name	Description
Valid To (GMT)	The expiration date and time of a certificate, expressed in Greenwich Mean Time (GMT).
Status	The status of the certificate.
Certificate Authority	Name of the Certificate Authority (CA).
Kube Attributes	Kubernetes Attributes to identify certificates linked to specific objects, namespaces, and clusters.

All

This inventory displays all CLM-issued, discovered, or uploaded Server Authentication certificates.

Ingress Certificates

Certificates discovered from Kubernetes secrets and secrets associated with Kubernetes ingresses are classified as Ingress certificates. Similarly, certificates linked to OpenShift routes are also classified as **Ingress certificates**.

Infrastructure Certificates

Certificates discovered from Kubernetes control plane components via feature gate “**Discover K8’s Infra Certificates**” are classified as Infrastructure certificates.

ServiceMesh

KUBE+ provides the feature gate to secure pod-pod communication in a Kubernetes service mesh infrastructure with mTLS certificates signed by Enterprise PKI. If the feature gate “**Enable mTLS certificates for Service Mesh**” is enabled the mTLS certificates signed by AppViewX will be classified as Service Mesh certificates.

Others

Certificates discovered from Kubernetes secrets and not associated with any ingress (or) which does not classify into any of the above categories will be classified as Other certificates.

- [Exporting a Server Certificate](#)
- [Deleting Server Certificates](#)
- [Changing Server Certificate Status](#)

- [Assigning Server Certificate Group](#)
- [Unassigning Server Certificate Group](#)
- [Bulk Server Certificate Revoke Action](#)
- [Add/Modify Comments for Server Certificate](#)
- [Updating Certificate Attributes for Server Certificate](#)
- [Bulk Updating Certificate Attributes](#)
- [Pushing a Server Certificate to a Device](#)
- [Renewing a Server Certificate](#)

Exporting a Server Certificate

You can export certificate(s) from the Server Certificate inventory in the form of columns and values. These certificates can be exported either in an **.xls** or **.csv** format. This can be used for reporting or making another inventory.

To export a server certificate:

1. On the **Server Certificate** page, select the certificate that you want to export.
2. From the **Actions** dropdown menu, select **Export Certificates**.
The **Export** pop-up window is displayed.
3. Select the required **Options** and **Format**.
The selected certificate is exported to your local machine.

Deleting Server Certificates

AppViewX lets you delete individual certificates, selected certificates, and all certificates from the server certificate inventory.



Note: Once a certificate is deleted from the inventory, it will not be displayed in any reports and alerts.

Deleting Individual Server Certificates from the Inventory

1. Go to **Menu > KUBE+ > VISIBILITY > Server > All**.
The **Server Certificate** page is displayed.


2. From the **Server Certificate** inventory, for the certificate(s) you want to delete, select the corresponding checkboxes.
3. From the **Actions** dropdown menu, select **Delete**.
4. From the **Delete Certificate** confirmation dialog box, click **Yes**.
The selected certificate(s) will be deleted.

Deleting Individual Certificates from the Holistic View



Note: Via the holistic view, you can delete only one certificate at a time.


1. Go to **Menu > KUBE+ > VISIBILITY > Server > All**.
The **Server Certificate** page is displayed.
2. From the **Server Certificate** inventory, click the **Common Name** of the certificate you want to delete.
The holistic view of the selected certificate is displayed.
3. Hover your mouse over the  (**More**) icon and from the menu displayed, click **Delete Certificate**.

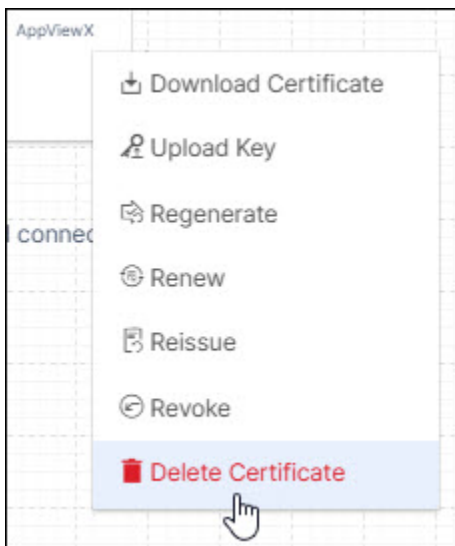

4. In the **Confirmation** dialog box that is displayed, click **Yes**.
The server certificate is deleted from the AppViewX inventory.


Deleting all Server Certificates

1. Go to **Menu > KUBE+ > VISIBILITY > Server > All**.
The **Server Certificate** page is displayed.
2. In the **Server Certificate** inventory, select the checkbox next to the **Common Name** field label.

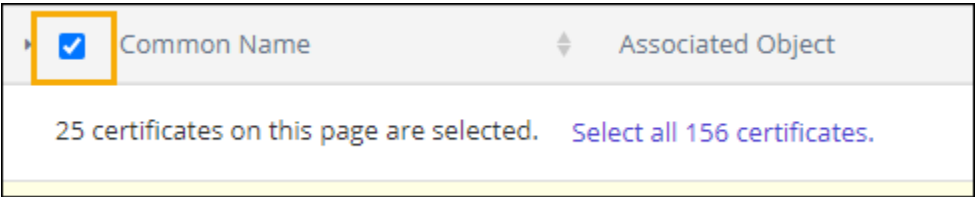


All certificates on the current page are selected.

3. To select all certificates in the server certificate inventory, click **Select all <no. of certificates> certificates.**

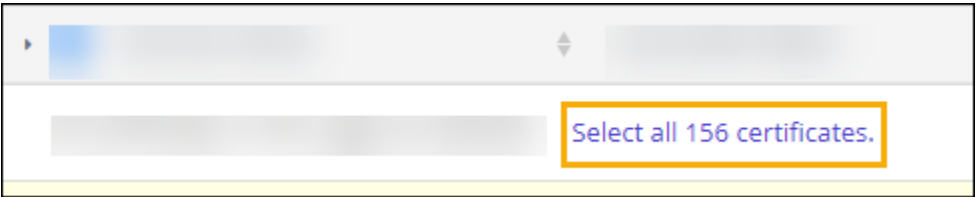

This will select all certificates across all pages in the server certificate inventory.

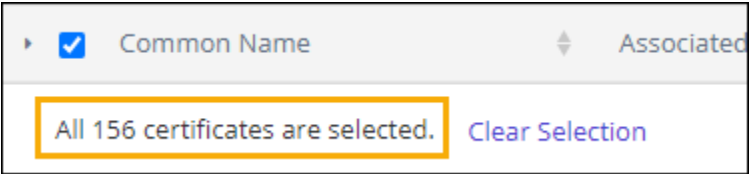

4. From the **Actions** dropdown menu, select **Delete**.
5. From the **Delete Certificate** confirmation dialog box, click **Yes**.
- All certificates in the server certificate inventory are deleted.



Note: The **Select all <no. of certificates> certificates** option does not allow deselecting individual certificates. If, after selecting all the certificates, you deselect a few certificates, only the remaining certificates on the current page will remain selected. The certificates on the other pages of the inventory will be deselected automatically.

Example: Assume you have 150 certificates in your inventory and each page is set to display 25 records. If you select all 150 certificates and then deselect two certificates from the first page, only the remaining 23 certificates on the first page will be selected. The other 125 certificates will be deselected.

Changing Server Certificate Status

The status of a certificate can be set as monitored or managed during or after the certificate discovery process and also from the certificate inventory directly. When the certificates are set as Monitored, you can only view the certificate details in reports and in the inventory. When the certificates are set as

Managed, the certificate-related actions. All certificates that are discovered will be in a monitored state. Any certificate enrolled from the Kubernetes cluster via KUBE+ will be in a managed state.

To change the server certificate status:

1. On the **Server Certificate** page, select the certificate for which you want to change status.
2. From the **Actions** dropdown, click **Change Status**.
3. In the **Change Status** pop-up window that is displayed, in the **Change Status to** field, select the status of the certificate field as **Managed** or **Monitored**.


4. Enter the reason for changing the status, if required, and click **Yes**.
The certificate status is changed as per the selection.

Assigning Server Certificate Group

The certificates with common attributes can be grouped together to perform compliance checks against policy details, to enable auto-renewal and auto-push operations. You can also view certificates as groups.

To assign a server certificate to a group:

1. On the **Server Certificate** page, select the certificate that you want to assign to a group.
2. From the **Actions** dropdown, click **Assign Group**.
3. In the **Assign to Group** pop-up window that is displayed, search for the group that you want this certificate to be assigned to.

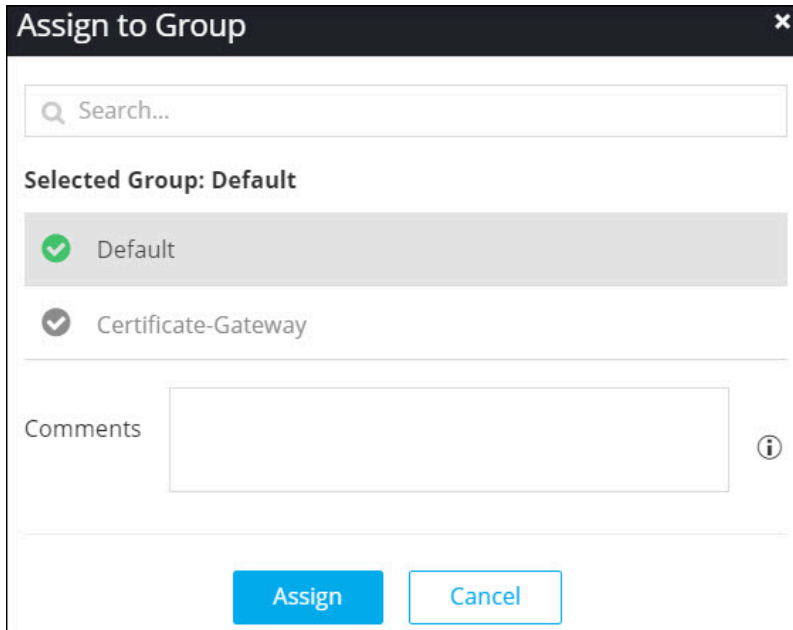

The image shows a dialog box titled "Assign to Group" with a close button (X) in the top right corner. Inside the dialog, there is a search bar with a magnifying glass icon and the text "Search...". Below the search bar, it says "Selected Group: Default". There are two list items: "Default" with a green checkmark icon and "Certificate-Gateway" with a grey checkmark icon. Below the list is a "Comments" section with a text input field and an information icon (i) to its right. At the bottom of the dialog are two buttons: "Assign" (blue) and "Cancel" (light blue).

4. Select the required certificate group.
5. Enter a reason for assigning the certificate to the selected certificate group, if required, and click **Assign**.

The certificate is assigned to the selected group.

Unassigning Server Certificate Group

You can unassign any certificates from a specific certificate group to the default group. The policy and actions of the default group will be applied to these certificates.

To unassign a server certificate from a certificate group:

1. On the **Server Certificate** page, select the certificate that you want to unassign from a certificate group.
2. From the **Actions** dropdown, click **Unassign Group**.
3. In the **Unassign Group** window that is displayed, enter the reason for unassigning the certificate from the group and click **Unassign**.

The selected certificate is now assigned to the default group.

Bulk Server Certificate Revoke Action



Note: For the DevOps users, the issuing CA may disable the revoke action. In this case, a pop-up message, informing the user of this, is displayed. For enterprise users, the revoke action is enabled.

To revoke a server certificate:

1. On the **Server Certificate** page, select the certificate that you want to revoke .
2. From the **Actions** dropdown, click **Revoke Certificate**.
3. In the **Certificate Revoke** window that is displayed, enter the reason for revoking the certificate and click **Submit**.

The selected certificate is now revoked.

Add/Modify Comments for Server Certificate

To add/modify comments for certificate(s):

1. On the **Server Certificate** page, select the certificate that you want to revoke.
2. From the **Actions** dropdown, click **Add/Modify Comments**.
3. In the **Add/Modify Comments** dialog box that is displayed, enter a comment and click **Save**.

Updating Certificate Attributes for Server Certificate

Other than the fields that are defined for CSR, you can add organization-specific values to a request. These values will not be part of the certificate but will be available in the AppViewX inventory. For example, cost center. Inventory can be filtered based on these attributes.

To update the certificate attribute for a server certificate:

1. On the **Server Certificate** page, select the certificate for which you want to update attributes.
2. From the **Actions** dropdown, click **Certificate Attributes**.
3. Update the **Certificate Attributes** and click **Save**.

Bulk Updating Certificate Attributes

Bulk Updating Attributes using a CSV File

1. Go to **Menu > KUBE+ > VISIBILITY > Client > All**.

The **Client Certificate** page is displayed.

2. From the **Actions** menu, select **Bulk Update Attributes Value**.

The **Bulk Update Attributes Value** dialog box is displayed.



Note: Before you bulk update the certificate attribute values, review the attribute and expiry configuration mapping to prevent errors. Ensure that no updates are made to attributes involved in an expiry alert.

3. From the options for **Update Method**, select **File Upload**.

4. Click **Download Template**.

A **.csv** file will be downloaded to your system. This file has the format in which you need to specify the attributes and their corresponding updated values (along with the certificate identification details).

5. In the **Upload File** field, click **Upload**.

6. Navigate to the location where the updated **.csv** file is saved on your system and upload the file.

7. Click **Save**.

Bulk Updating Attributes for a Certificate Group

1. Go to **Menu > KUBE+ > VISIBILITY > Client > All**.

The **Client Certificate** page is displayed.

2. From the **Actions** menu, select **Bulk Update Attributes Value**.

The **Bulk Update Attributes Value** dialog box is displayed.



Note: Before you bulk update the certificate attribute values, review the attribute and expiry configuration mapping to prevent errors. Ensure that no updates are made to attributes involved in an expiry alert.

3. From the options for **Update Method**, select **Based on Certificate Group**.

4. From the dropdown list, select the required **Certificate Group**.

5. From the dropdown list, select one or more **Cert Attributes** that you want to update.

Corresponding text/list fields are displayed depending on the **Cert Attributes** selected.

6. Enter the required value for each attribute selected in the corresponding field.

7. Click **Save**.

Downloading Failed Updates

From the **Bulk Update Attributes Value** dialog box, to view failed bulk updates to the certificate attributes, click **Download Failed Updates**.

A **.csv** file with a log of the failed updates is downloaded to your local system.

Pushing a Server Certificate to a Device

1. Go to **Menu > KUBE+ > VISIBILITY > Server > All**.

The **Server Certificate** page is displayed.

2. To push a certificate, under **Common Name**, click the required certificate.

The certificate topology view is displayed.

3. Click **Push to Device**. The Push to Device option will be shown if the app connector is for a Kube Secret.



Note: The **Push to Device** option is displayed only after an app connector is added to certificate.

The **Confirmation** dialog box is displayed.

4. Enter your comments, if required, in the text field.

5. Click **OK**.

- The approval process is triggered. The current flow is based on the default policy of two-level approvals.
- A request ID and work order ID are generated automatically and the work order status is displayed alongside the connector in the certificate topology view.

6. To approve the push request, from the certificate topology view, click **Approve**.

7. In the **Confirmation** dialog box:

- a. In the **Manual Implementation** field, to choose the mode of implementation, use the **On/Off** toggle.
- b. If you select **Off**, set the date and time to schedule the certificate push.
- c. Enter your comments in the text field and click **Yes**.

The work order status displayed beside the connector updates to **Push-Review In Progress**.


8. To implement the push request, from the certificate topology view, click **Implement**.

9. In the **Confirmation** dialog box:

- a. In the **Manual Implementation** field, to choose the mode of implementation, use the **On/Off** toggle.
- b. If you select **Off**, set the date and time to schedule the certificate push.
- c. Enter your comments in the text field and click **Yes**.

The push action is triggered. After the push action is completed, the status updates to **Completed**.

To refresh the certificate topology view, from the top-right corner of the screen, click **Refresh**.



Color Codes Status

The topological view follows a color codes scheme to identify certificate status.

Full list of color codes and their descriptions

Color	Description
Green	The certificate is available and valid.
Red	.The certificate has expired
Gray	Certificate push action failed.
Blue	The certificate will expire in 90 days.
Yellow	The certificate will expire in 30 days.
Orange	The certificate will expire in 10 days.
Black	The certificate has been revoked.
Mid Purple	The certificate associated with profiles is manually removed.

What's Next

After pushing a server certificate to a device, you can proceed with configuring expiry alerts:

- To set up expiry alerts and be notified of certificate statuses, see [Configuring Expiry Alerts](#).


Renewing a Server Certificate

If you are renewing a single certificate, you can trigger the renewal from the holistic view as they can verify all the details before initiating the renewal.

To renew a server certificate:

1. Go to **Menu > KUBE+ > VISIBILITY > Server > All**.
The **Server Certificate** page is displayed.
2. To open the holistic view of a certificate, under **Common Name**, select the required certificate name.

3. From the **(More)** menu for the certificate, click **Renew**.

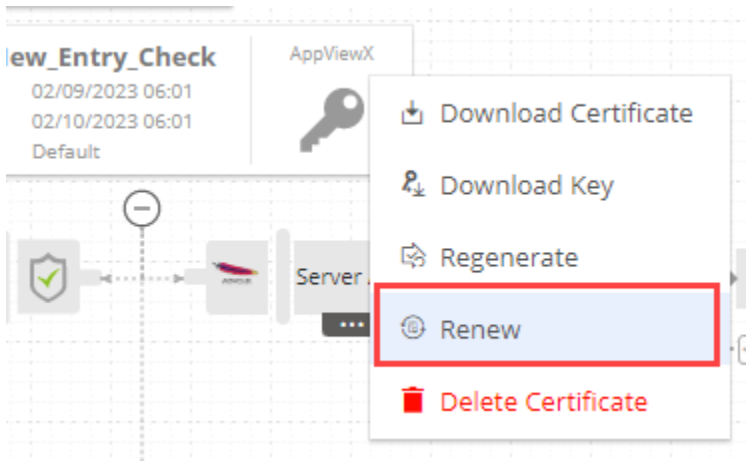

The **Server Certificate > Renew** page is displayed. The fields on this page are displayed depending on the type of certificate and the issuing certificate authority.

4. On the **Server Certificate > Renew** page, update the renewal details if and as required.
For field descriptions, you can refer to the instructions for enrolling a server certificate.



Note: Starting version 2023.1.0 FP2, for certificates issued by Entrust and Microsoft, you can upload a new CSR in the **CSR Generation** field.

- If you are uploading a new CSR, ensure that the new and existing **Common Name** in the **CSR Parameters** are the same.


5. Click **Renew**.

The **Renew** dialog box is displayed.

6. Enter your comments in the text field and click **Yes**.

A request ID, which is the work order ID, is generated automatically, and work order status is displayed adjacent to the certificate in the holistic view. If the approval required option is enabled in the CA policy, the request is moved to the **Approve** and **Implementation** stages.

7. Click **Approve** to proceed.

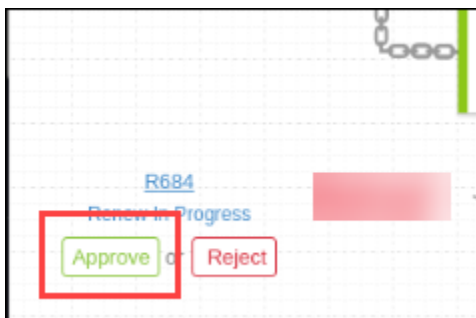

The **Approve** dialog box is displayed.

8. Enter your comments in the text field.

 **Note:** If the workflow request has to be approved automatically in the future, click the **Schedule later** button .

9. Click **Yes**.

Once the approval process is complete, the **Implement** option is displayed in the holistic view.

10. Click **Implement**.



The **Implement** dialog box is displayed.

11. Enter your comments in the text field.

If the workflow request has to be implemented automatically in the future, click **Schedule later** .

12. Click **Yes**.

The renewal process is triggered. After renewal is completed, the workflow status updates to **Completed**.

Client

Client certificate inventory is where all the client certificates with the EKU (Extended/enhanced Key Usage) Client authentication will be present.

In this release, renewals and regenerations of the client certificates are only supported through the Cert-Orchestrator, which is part of the in-cluster component of KUBE+.

To go to Client certificate inventory page, go to **menu > KUBE+ > VISIBILITY > Client**.

The following table describes the options available on the server certificate inventory page:

Options available on the Client Certificate page

Options	Description
	Allows you to switch between the view by clicking the toggle button.
Groups	Expanding this dropdown displays the certificate groups and the number of certificates in each group. Selecting a group will display the filtered list of certificates.
Filter Summary	Displays the status of certificates according to expiry, compliance, validity, and so on.
Advanced Search	Allows you to perform a quick search for specific data. Clicking on the search bar dropdown opens the Advanced Search window. To find the preferred server certificate, perform any of the following: 1. Choose the CAs from the Certificate Authority dropdown menu. 2. Enter the desired search terms in the Common Name, Serial Number, or Issuer Common Name field. 3. Select a certificate attribute from the dropdown list and if required add more certificate attributes to the search criteria by clicking the Add Certificate Attribute. 4. Click Search. The matching server certificates are displayed on the Server Certificate page.

Options available on the Client Certificate page (continued)

Options	Description
Actions	Displays the list of actions you can perform on the certificates. • Export Certificates • Download Certificates • Delete • Change Status • Assign Group • Unassign Group • Add/Modify Comments • Certificate Attributes • Renew Certificate • Revoke Certificate • CA Switch • Revocation Check
Columns	Allows you to select the columns to be displayed on the Server Certificate inventory page.
Number of Rows per Page	Hover the mouse over the number of row displayed on the page, the Show popup opens and choose the no. of rows to be displayed on the page.
	Allows to switch between the certificate inventory pages.
	Allows to refresh the certificate inventory data.

The Client Certificate inventory list includes the following information:

Column and Description Table

Column Name	Description
Common Name	The common name of the certificate.
Discovery Source	The source from which a certificate management system discovers and retrieves information about certificates
Serial Number	A unique identifier assigned to the certificate by the CA during the issuance process.
Group	The certificate group name.
Issuer Common Name	Issuer name of the certificate.
Valid To (GMT)	The expiration date and time of a certificate, expressed in Greenwich Mean Time (GMT).
Status	The status of the certificate.
Certificate Authority	Name of the Certificate Authority (CA).
Kube Attributes	Kubernetes Attributes to identify certificates linked to specific objects, namespaces, and clusters.

All

This inventory displays all CLM-issued, discovered, or uploaded Client Authentication certificates.

Ingress Certificates

Certificates discovered from Kubernetes secrets and secrets associated with kubernetes ingresses are classified as Ingress certificates.

Infrastructure Certificates

Certificates discovered from Kubernetes control plane components via feature gate “**Discover K8’s Infra Certificates**” are classified as Infrastructure certificates.

ServiceMesh

KUBE+ provides the feature gate to secure pod-pod communication in a Kubernetes service mesh infrastructure with mTLS certificates signed by Enterprise PKI. If the feature gate “**Enable mTLS certificates for Service Mesh**” is enabled the mTLS certificates signed by AppViewX will be classified as Service Mesh certificates.

Others

Certificates discovered from Kubernetes secrets and not associated with any ingresses (or) which does not classify into any of the above categories will be classified as Other certificates.

- [Exporting Client Certificate](#)
- [Deleting Client Certificates](#)
- [Changing Client Certificate Status](#)
- [Assigning Client Certificate Group](#)
- [Unassigning Client Certificate Group](#)
- [Bulk Client Certificate Revoke Action](#)
- [Add/Modify Comments for Client Certificate](#)
- [Updating Certificate Attributes for Client Certificate](#)
- [Bulk Updating Certificate Attributes](#)
- [Pushing a Client Certificate to a Device](#)
- [Renewing a Client Certificate](#)

Exporting Client Certificate

Export certificate action allows the user to export certificate details in the form of columns and values. The user can export all the certificates in the inventory or select only specific certificates and export. The output of this action can be selected in **.xls** or **.csv** format. This can be used for reporting or creating an inventory.

To export a client certificate:

1. On the **Client Certificate** page, select the certificate that you want to export.
2. From the **Actions** dropdown menu, select **Export Certificates**.
The **Export** dialog box is displayed.
3. Select the required **Options** and **Format**.
The selected certificate is exported to your local machine.

Deleting Client Certificates

AppViewX lets you delete individual certificates, selected certificates, and all certificates from the server certificate inventory.



Note: Once a certificate is deleted from the inventory, it will not be displayed in any reports and alerts.

Deleting Individual Client Certificates from the Inventory

1. Go to **Menu > KUBE+ > VISIBILITY > Client > All**.

The **Client Certificate** page is displayed.

2. From the **Client Certificate** inventory, for the certificate(s) you want to delete, select the corresponding checkboxes.

3. From the **Actions** dropdown menu, select **Delete**.

4. From the **Delete Certificate** confirmation dialog box, click **Yes**.

The selected certificate(s) will be deleted.

Deleting Client Certificates from the Holistic View



Note: Via the holistic view, you can delete only one certificate at a time.


1. Go to **Menu > KUBE+ > VISIBILITY > Client > All**.

The **Client Certificate** page is displayed.

2. From the **Client Certificate** inventory, click the **Common Name** of the certificate you want to delete.

The holistic view of the selected certificate is displayed.


3. Hover your mouse over the  (**More**) icon and from the menu displayed, click **Delete Certificate**.

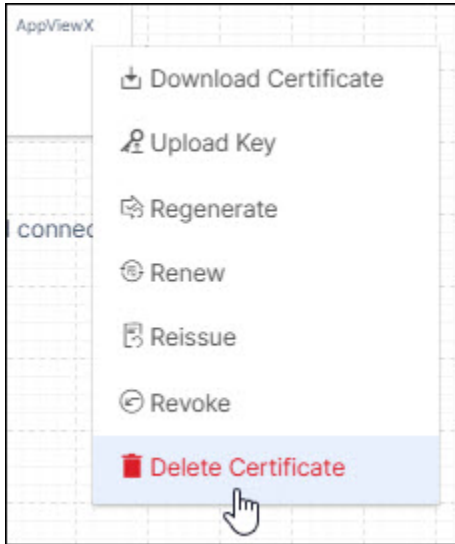

4. In the **Confirmation** dialog box that is displayed, click **Yes**.
The client certificate is deleted from the AppViewX inventory.


Deleting all Client Certificates

1. Go to **Menu > KUBE+ > VISIBILITY > Client > All**.
The **Client Certificate** page is displayed.
2. In the **Client Certificate** inventory, select the checkbox next to the **Common Name** field.

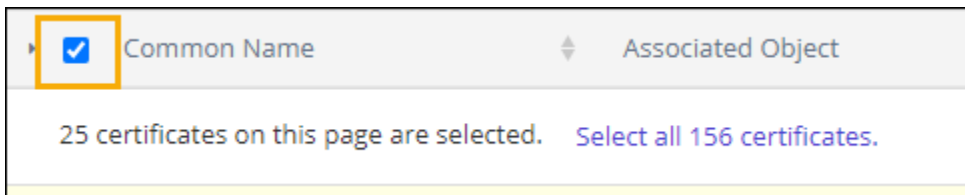


All certificates on the current page are selected.

3. To select all certificates in the client certificate inventory, click **Select all <no. of certificates> certificates**.

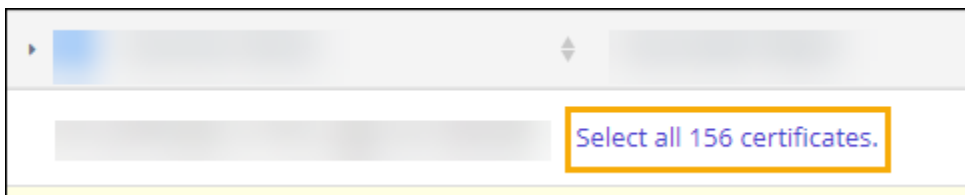

This will select all certificates across all pages in the client certificate inventory.

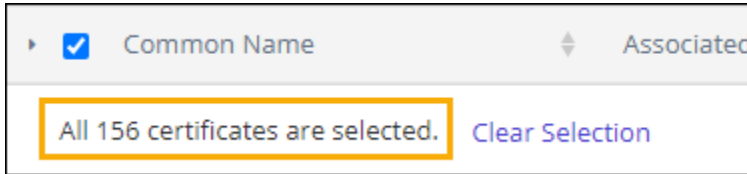

4. From the **Actions** dropdown menu, select **Delete**.
 5. From the **Delete Certificate** confirmation dialog box, click **Yes**.
- All certificates in the client certificate inventory are deleted.



Note: The **Select all <no. of certificates> certificates** option does not allow deselecting individual certificates. If, after selecting all the certificates, you deselect a few certificates, only the remaining certificates on the current page will remain selected. The certificates on the other pages of the inventory will be deselected automatically.

Example: Assume you have 150 certificates in your inventory and each page is set to display 25 records. If you select all 150 certificates and then deselect two certificates from the first page, only the remaining 23 certificates on the first page will be selected. The other 125 certificates will be deselected.

Changing Client Certificate Status

The status of a certificate can be set as monitored or managed during or after the certificate discovery process and also from the certificate inventory directly. When the certificates are set as Monitored, you can only view the certificate details in reports and in the inventory. When the certificates are set as Managed, the certificate-related actions along with push/bind operations can be performed along with viewing of the certificates in the reports and inventory.

To change the client certificate status:

1. On the **Client Certificate** page, select the certificate for which you want to change status.
2. From the **Actions** dropdown, click **Change Status**.
3. In the **Change Status** pop-up window that is displayed, in the **Change Status to** field, select the status of the certificate field as **Managed** or **Monitored**.
4. Enter the reason for changing the status, if required, and click **Yes**.

The certificate status is changed as per the selection.

Assigning Client Certificate Group

The certificates with common attributes can be grouped together to perform compliance checks against policy details, to enable auto-renewal and auto-push operations. You can also view certificates as groups.

To assign a client certificate to a group:

1. On the **Client Certificate** page, select the certificate that you want to assign to a group.
2. From the **Actions** dropdown, click **Assign Group**.
3. In the **Assign to Group** pop-up window that is displayed, search for the group that you want this certificate to be assigned to.
4. Select the required certificate group.
5. Enter a reason for assigning the certificate to the selected certificate group, if required, and click **Assign**.

The certificate is assigned to the selected group.

Unassigning Client Certificate Group

The user can unassign any certificates from the specific group to the default group. The policy and actions of the default group will be applied to these certificates.

To unassign the client certificate group,

1. On the **Client Certificate** page, select the certificate that you want to assign to a group.
2. From the **Actions** dropdown, click **Unassign Group**.
3. In the **Unassign Group** window that is displayed, enter the reason for unassigning the certificate from the group and click **Unassign**.

The selected certificate is now assigned to the default group.

Bulk Client Certificate Revoke Action



Note: For the DevOps users, the issuing CA may disable the revoke action. In this case, a pop-up message, informing the user of this, is displayed. For enterprise users, the revoke action is enabled.

To revoke a server certificate:

1. On the **Client Certificate** page, select the certificate that you want to revoke .
2. From the **Actions** dropdown, click **Revoke Certificate**.
3. In the **Certificate Revoke** window that is displayed, enter the reason for revoking the certificate and click **Submit**.

The selected certificate is now revoked.

Add/Modify Comments for Client Certificate

To add/modify comments for certificate(s):

1. On the **Client Certificate** page, select the certificate that you want to revoke.
2. From the **Actions** dropdown, click **Add/Modify Comments**.
3. In the **Add/Modify Comments** pop-up window that is displayed, enter a comment and click **Save**.

Updating Certificate Attributes for Client Certificate

Other than the fields that are defined for CSR, you can add organization-specific values to a request. These values will not be part of the certificate but will be available in the AppViewX inventory. For example, cost center. Inventory can be filtered based on these attributes.

To update the certificate attribute for a client certificate:

1. On the **Client Certificate** page, select the certificate for which you want to update attributes.
2. From the **Actions** dropdown, click **Certificate Attributes**.
3. Update the **Certificate Attributes** and click **Save**.

Bulk Updating Certificate Attributes

Bulk Updating Attributes using a CSV File

1. Go to **Menu > KUBE+ > VISIBILITY > Client > All**.
The **Client Certificate** page is displayed.
2. From the **Actions** menu, select **Bulk Update Attributes Value**.
The **Bulk Update Attributes Value** dialog box is displayed.



Note: Before you bulk update the certificate attribute values, review the attribute and expiry configuration mapping to prevent errors. Ensure that no updates are made to attributes involved in an expiry alert.

3. From the options for **Update Method**, select **File Upload**.
4. Click **Download Template**.
A **.csv** file will be downloaded to your system. This file has the format in which you need to specify the attributes and their corresponding updated values (along with the certificate identification details).
5. In the **Upload File** field, click **Upload**.
6. Navigate to the location where the updated **.csv** file is saved on your system and upload the file.
7. Click **Save**.

Bulk Updating Attributes for a Certificate Group

1. Go to **Menu > KUBE+ > VISIBILITY > Client > All**.
The **Client Certificate** page is displayed.
2. From the **Actions** menu, select **Bulk Update Attributes Value**.
The **Bulk Update Attributes Value** dialog box is displayed.



Note: Before you bulk update the certificate attribute values, review the attribute and expiry configuration mapping to prevent errors. Ensure that no updates are made to attributes involved in an expiry alert.

3. From the options for **Update Method**, select **Based on Certificate Group**.
4. From the dropdown list, select the required **Certificate Group**.
5. From the dropdown list, select one or more **Cert Attributes** that you want to update.
Corresponding text/list fields are displayed depending on the **Cert Attributes** selected.
6. Enter the required value for each attribute selected in the corresponding field.
7. Click **Save**.

Downloading Failed Updates

From the **Bulk Update Attributes Value** dialog box, to view failed bulk updates to the certificate attributes, click **Download Failed Updates**.

A **.csv** file with a log of the failed updates is downloaded to your local system.

Pushing a Client Certificate to a Device

1. Go to **Menu > KUBE+ > VISIBILITY > Client > All**.

The **Client Certificate** page is displayed.

2. To push a certificate, under **Common Name**, double click the required certificate.

The certificate topology view is displayed.

3. Click **Push to Device**. The Push to Device option will be shown if the app connector is already added to the certificate otherwise add the app connector and then proceed.



Note: The **Push to Device** option is displayed only after an app connector is added to certificate.

The **Confirmation** dialog box is displayed.

4. Enter your comments, if required, in the text field.

5. Click **OK**.

- The approval process is triggered. The current flow is based on the default policy of two-level approvals.
- A request ID and work order ID are generated automatically and the work order status is displayed alongside the connector in the certificate topology view.

6. To approve the push request, from the certificate topology view, click **Approve**.

7. In the **Confirmation** dialog box:

- a. In the **Manual Implementation** field, to choose the mode of implementation, use the **On/Off** toggle.
- b. If you select **Off**, set the date and time to schedule the certificate push.
- c. Enter your comments in the text field and click **Yes**.

The work order status displayed beside the connector updates to **Push-Review In Progress**.

8. To implement the push request, from the certificate topology view, click **Implement**.

9. In the **Confirmation** dialog box:

- a. In the **Manual Implementation** field, to choose the mode of implementation, use the **On/Off** toggle.
- b. If you select **Off**, set the date and time to schedule the certificate push.
- c. Enter your comments in the text field and click **Yes**.

The push action is triggered. After the push action is completed, the status updates to **Completed**.

Colour Codes Status

The topological view follows a colour codes scheme to identify certificate status.

Full list of color codes and their descriptions

Colour	Description
Green	The certificate is available and valid.
Red	The certificate has expired.
Gray	Certificate push action failed.
Blue	The certificate will expire in 90 days.
Yellow	The certificate will expire in 30 days.
Orange	The certificate will expire in 10 days.
Black	The certificate has been revoked.
Mid Purple	The certificate associated with profiles is manually removed.

Renewing a Client Certificate

If you are renewing a single certificate, you can trigger the renewal from the holistic view as they can verify all the details before initiating the renewal.


To renew a client certificate:

1. Go to **Menu > KUBE+ > VISIBILITY > Client > All**.

The **Client Certificate** page is displayed.

2. To open the holistic view of a certificate, under **Common Name**, select the required certificate name.

3. From the  (**More**) icon for the certificate, click **Renew**.

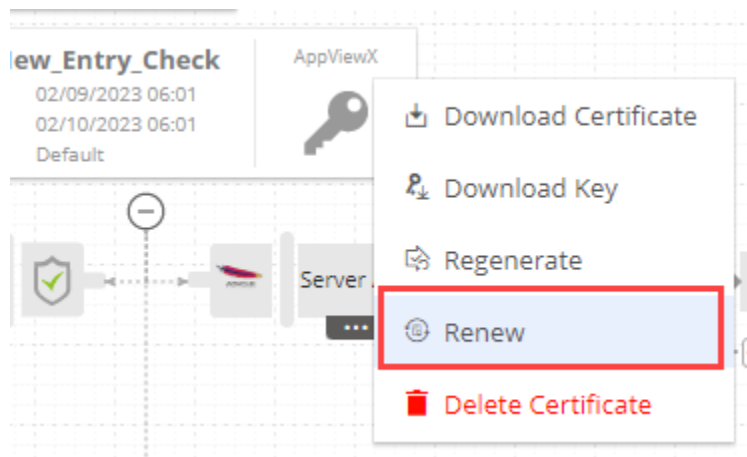

The **Client Certificate > Renew** page is displayed. The fields on this page are displayed depending on the type of certificate and the issuing certificate authority.

- On the **Client Certificate > Renew** page, update the renewal details if and as required.



Note: Starting version 2023.1.0 FP2, for certificates issued by Entrust and Microsoft, you can upload a new CSR in the **CSR Generation** field.

- If you are uploading a new CSR, ensure that the new and existing **Common Name** in the **CSR Parameters** are the same.


- Click **Renew**.

The **Renew** dialog box is displayed.

- Enter your comments in the text field and click **Yes**.

A request ID, which is the work order ID, is generated automatically, and work order status is displayed adjacent to the certificate in the holistic view. If the approval required option is enabled in the CA policy, the request is moved to the **Approve** and **Implementation** stages.

- Click **Approve** to proceed.

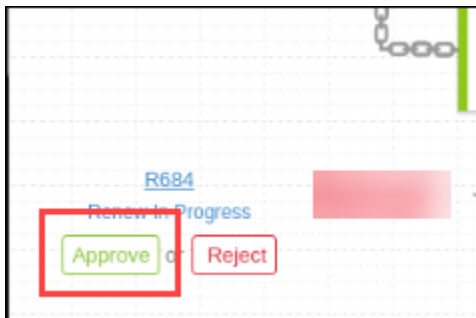

The **Approve** dialog box is displayed.

- Enter your comments in the text field.



Note: If the workflow request has to be approved automatically in the future, click the **Schedule later** button .

- Click **Yes**.

Once the approval process is complete, the **Implement** option is displayed in the holistic view.

- Click **Implement**.



The **Implement** dialog box is displayed.

- 11. Enter your comments in the text field.
If the workflow request has to be implemented automatically in the future, click **Schedule later** .
- 12. Click **Yes**.
The renewal process is triggered. After renewal is completed, the workflow status updates to **Completed**.

Trust Store

The Trust Store certificate inventory consists of the following:


- Intermediate
- Root

To go to the Trust Store certificate inventory page, go to **menu > KUBE+ > VISIBILITY > Trust Store**.

Options available on the Intermediate and Root Certificate page

Options	Description
Advanced Search	Allows you to perform a quick search for specific data. Clicking on the search bar dropdown opens the Advanced Search window.
All	Allows you to filter the certificates by their Certificate Authority (CA).
Actions	Displays the list of actions you can perform on the certificates: • Export Certificates • Copy • Download • Delete

Options available on the Intermediate and Root Certificate page (continued)

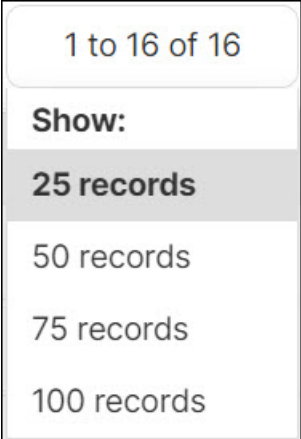Options	Description
	• Chain of Trust Preference • Certificate Attributes
Columns	Allows you to select the columns to be displayed on the Client Certificate inventory page.
Number of Rows per Page	hover the mouse over the number of row displayed on the page, the Show popup opens and choose the no. of rows to be displayed on the page. 
	Allows to switch between the certificate inventory pages.
	Allows to refresh the certificate inventory data.

The Trust Store certificate inventory list includes the following information:

Column and Description Table

Column Name	Description
Common Name	The common name of the certificate.
Certificate Authority	Name of the Certificate Authority (CA).

Column and Description Table (continued)

Column Name	Description
Serial Number	A unique identifier assigned to the certificate by the CA during the issuance process.
Valid From (GMT)	The start date and time of a certificate, expressed in Greenwich Mean Time (GMT).
Valid To (GMT)	The expiration date and time of a certificate, expressed in Greenwich Mean Time (GMT).
Issuer Organization	The name of the issuer organization of the certificate that acts as the CA.
Issuer Organization Unit	The name of the issuer organization unit of the certificate that acts as the CA.
Key Algorithm & Size	The key type of the certificate such as: 1. RSA 2. ECDSA and sizes such as: • 2048/4096/3072 bit length for RSA. 256 / 384 / 521 bit length for ECDSA.
Signature	The private key of the certificate issuer.
Discovery Source	The source from which a certificate management system discovers and retrieves information about certificates.
Discovered File Name(s)	The name of the file discovered during a discovery process.
Application(s)	The applications that use the certificates.
Associated Object(s)	The objects that are linked to a particular certificate.

Intermediate

Intermediate certificate inventory is where the issuer certificates apart from the root certificate will be displayed. In the chain of trust, if there is more than one layer of the intermediate certificate (excluding root and end certificate), all those certificates will be shown in this inventory.

Root

Root certificate inventory is where the root certificate of all the issuer certificates will be maintained. For any chain of trust certificates, there can be only one root certificate.

Dashboard - Insights

The PKI Dashboard provides a centralized view of certificate management and compliance across Kubernetes clusters. It offers key insights into the state of certificates, their compliance posture, and adoption metrics, helping security and platform teams efficiently manage and track certificates within their environment.

This dashboard is designed to provide both high-level overviews and granular details about certificates, compliance issues, and platform adoption, ensuring better visibility and proactive management of PKI-related operations in Kubernetes clusters.


- [Dashboard Widgets Overview](#)
- [Certificate Management Metrics](#)
- [Platform Adoption & SelfService Features](#)

Dashboard Widgets Overview

The PKI Dashboard is structured into two primary sections:

1. **Certificate Management Metrics** – Provides insights into certificates used within Kubernetes clusters, their expiry status, compliance posture, and issuing authorities.
2. **Platform Adoption & Self-Service Features** – Offers tools to onboard clusters, configure alerts, track adoption, and understand overall platform usage.

Below is a breakdown of each widget with details on the insights they offer.

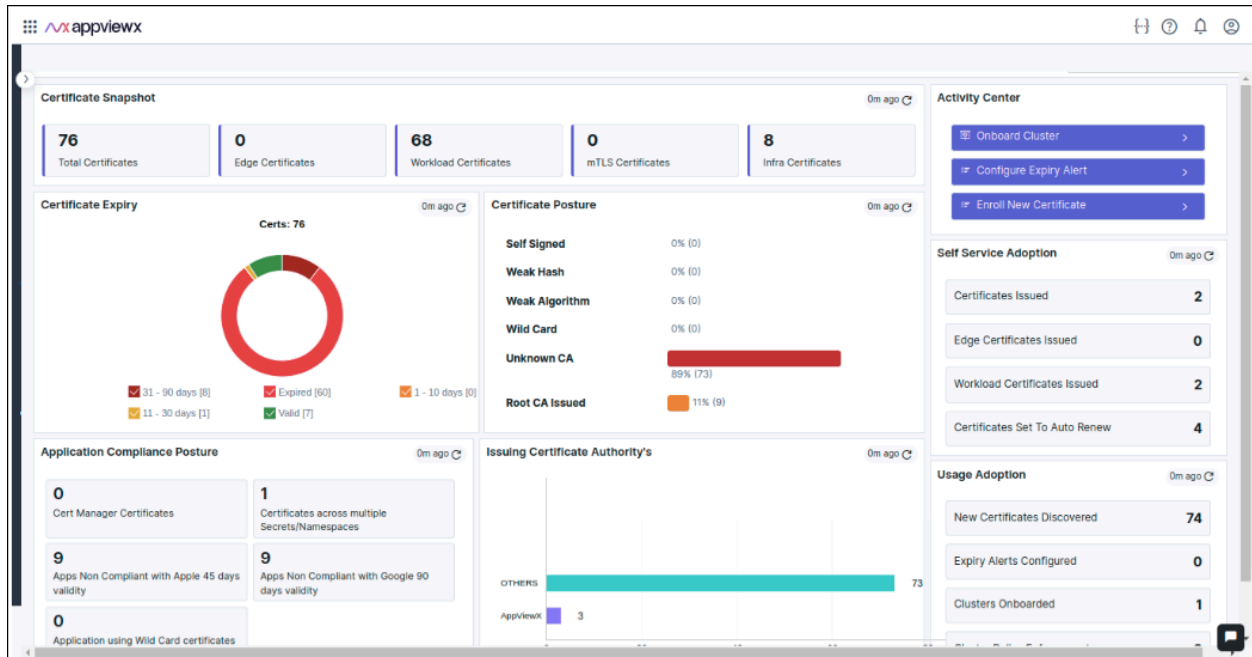

Certificate Management Metrics

- Certificates Snapshot
- Certificates Expiry
- Certificate Posture
- Application Posture
- Issuing Certificate Authority's

Certificates Snapshot

This widget provides a real-time overview of all certificates managed across Kubernetes clusters, segmented into different categories:

- Total Certificates – The total number of certificates being managed.
- Edge Certificates – Certificates used by Kubernetes Ingress, Gateway, and Routes.
- Workload Certificates – Certificates used within the cluster but not by edge components.

- mTLS Certificates – Certificates issued by AppViewX KUBE+ for service mesh mTLS communication.
- Infrastructure Certificates – Certificates used by Kubernetes system components.

Key Benefit: Helps track the distribution of certificates across different components of the Kubernetes ecosystem.

Certificates Expiry

A donut chart that provides a breakdown of certificates based on their expiry status:

- Valid Certificates – Currently active and within their validity period.
- About to Expire – Certificates nearing expiration.
- Expired Certificates – Certificates that have already expired.

Key Benefit: Provides a quick view of expiring certificates to ensure proactive renewal and avoid disruptions.

Certificate Posture

This widget highlights the compliance posture of the certificates managed across Kubernetes clusters. It helps in identifying certificates that impact overall compliance based on the following risk factors:

- Selfsigned Certificates
- Certificates issued by unknown CAs
- Wildcard Certificates
- Weak hash & key algorithms
- Certificates issued directly from a Root CA

Key Benefit: Helps identify noncompliant certificates that may introduce security risks.

Application Posture

This widget evaluates the compliance of applications deployed in the Kubernetes clusters, based on certificate-related risks. Metrics include:

- Applications using certificates not compliant with Google's 90 day readiness.
- Applications using certificates not compliant with Apple's 47 day readiness.
- Applications using wildcard certificates.
- Applications using certificates issued by certmanager (opensource version).
- Applications with certificates shared across multiple secrets and namespaces.

Key Benefit: Helps DevOps and security teams ensure applications adhere to best practices and compliance standards.

Issuing Certificate Authority's

This widget provides insights into the Certificate Authorities (CAs) that are being used to issue certificates across the Kubernetes environment.

Key Benefit: Gives the PKI team visibility into CAs in use, ensuring governance over certificate issuance.

Platform Adoption & SelfService Features

- [Activity Center](#)
- [Certificate Adoption Metrics](#)
- [Usage Adoption for the Platform](#)

Activity Center

A selfservice widget allowing users to:

- Onboard new clusters easily.
- Configure expiry alerts to receive timely notifications.
- Enroll new certificates for workloads and applications.

Key Benefit: Enables teams to take quick actions directly from the dashboard.

Certificate Adoption Metrics

Provides insights into certificate adoption trends within the platform, including:

- Number of certificates issued.
- Split of issued certificates into Edge, Workload, and mTLS categories.
- Number of certificates set to autorenew.

Key Benefit: Helps track certificate issuance trends and automation adoption.

Usage Adoption for the Platform

Displays high-level metrics on platform engagement, including:

- Newly discovered certificates.
- Expiry alerts configured.
- Clusters onboarded into the system.
- PKI policies enforced on Kubernetes clusters.

Key Benefit: Provides insight into how well the PKI management platform is being adopted across teams.

Policy Enforcement

- [Certificate Authority \(CA\) Integration](#)
- [Creating the CA Policy](#)
- [Groups](#)
- [Cluster Policy](#)
- [Appendix A: Prerequisites for Enabling the Integrated Windows Gateway Mode](#)

Certificate Authority (CA) Integration

AppViewX integrates with both internal and external Certificate Authorities (CA) to sign certificates for Kubernetes workloads. However, for service mesh mTLS certificates, AppViewX only supports signing with internal CAs such as EJBCA and MSCA.

Outlined below are the integration steps to get your CA integrated with AppViewX KUBE+.

- [Custom CA](#)
- [AppViewX CA](#)
- [AppViewX PKIaaS CA](#)
- [AppViewX PKIaaS Native CA](#)
- [Amazon and Amazon Private CA](#)
- [Segito CA](#)
- [DigiCert CA](#)
- [DigiCert MPKI CA](#)
- [EJBCA CA](#)
- [Entrust CA](#)
- [Entrust MPKI CA](#)
- [GlobalSign MSSL CA](#)
- [GlobalSign Atlas CA](#)
- [GlobalSign SSL CA](#)
- [GoDaddy CA](#)
- [Google CA](#)
- [Certificate Authority Service CA](#)
- [HashiCorp Vault CA](#)
- [InCommon CA](#)
- [Let's Encrypt CA](#)
- [Microsoft Enterprise CA](#)
- [Microsoft Standalone CA](#)
- [Nexus CA](#)
- [OpenTrust CA](#)
- [Symantec CA](#)
- [Trustwave CA](#)

Custom CA

Prerequisites

Following are the prerequisites for configuring Custom CA account in AppViewX:

- A logo to use for the custom CA.
- An optional CA certificate and key to be used as a root certificate.

Configuring Custom CA

To configure the custom CA:

1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**.
2. Update the following details in the **General Information** section as described in the table:

General Information - Field and Description Table

Name	Description
*Custom CA Name	A unique name to identify the CA name.  Note: No special characters allowed.
*Upload Custom CA Logo	Upload a logo for the custom CA. This logo will appear in the product representing the custom CA.
Custom CA Certificate	Upload a certificate for the custom CA. This certificate will become the root certificate.  Note: The <code><.pfx></code> and <code><.p12></code> are certificate types are supported.
*: Mandatory fields	

3. Once the logo and certificate are uploaded, the entered CA will appear in the CA list with the logo presented.
4. Once the logo is added, users can click **Configure Now** to input the CA details.
5. Update the following details in the **General Information** section as described in the table:

Name	Description
*Name	Client authentication certificate for API communication.
Data Center (AppViewX's CA agent)	Select the data center through which the CA communication needs to happen.
*: Mandatory fields	

6. Update the following details in the **ROOT CSR parameters** section as described in the table:

Root CSR - Field and Description Table

Name	Description
Common Name	The common name of the root certificate.  Note: • Use Asterisk (*) for the host part of the FQDN to enforce the domain. For example, *.domain.com will only allow users to request certificates with domain domain.com. • Allowed Special Characters: Asterisk (*), Hyphen (-), Period (.)
Algorithm	Type of the root certificate.
Hash Function	The hash function for the root certificate.
Organization Unit	Name of the Organisation unit.
Key Length	Key length for the root certificate.
Organization	Organization attribute for the root certificate.
Locality	Locality attribute for the root certificate.

Name	Description
State or Province	State attribute for the root certificate.
Country	Country attribute for the root certificate.
Email Address	Email address for the root certificate.
*: Mandatory fields	

7. Update the following details in the **Root Validity** section as described in the table.

Name	Description
*Start Date	Start date of the certificate issuance.
*End Date	End date of the certificate issuance.
*: Mandatory fields	

8. Click **Save**.

Once the setting is saved, the user will be directed to the root certificate submission holistic view.

9. Users can submit and fetch the root certificate.

10. On the CA setting page user can see the status of the created setting.

AppViewX CA

Configuring AppViewX CA

To configure the AppViewX CA:

- Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**.
- Select **AppViewX** from the left-side vendor list.
The **AppViewX** home page is displayed.
- Click the **Configure Now** or **+Add** icon from the middle or top-right of the page respectively.



Note: The **Configure Now** option is displayed if you are configuring a CA for the first time.

The **AppViewX** configuration page is displayed.

4. Enter/Select the following details in the **General Information** section:

General Information - Field and Description Table

Name	Description
*CA Account name	A unique name to identify the CA setting. Note: No special characters other than '.', '-', '_' are allowed. Names should not start with special characters.
*Purpose/Usage	Certificate Type for which CLM actions will be enabled. Example: Server, Client
CRL Required	Enable this field if the CA communication needs to happen via Proxy. The proxy details configured in general settings will be used for communication.
Data Center (AppViewX's CA agent)	Select the data center through which the CA communication needs to happen.
*: Mandatory fields	

5. Enter/Select the following **Credentials**-related information:

Credentials - Field and Description Table

Field	Description
Credential type*	From the dropdown list, from the following options, select the credential type: • Manual Entry: Manually enter the access and secret key for the customer's AWS account)
Access key*	Enter the access key for the customer's AWS account.

Field	Description
	 Note: This field is displayed only when Credential type is set to Manual Entry .
Secret key*	Enter the secret key for the customer's AWS account.  Note: This field is displayed only when Credential type is set to Manual Entry .
*: Mandatory fields	

6. Update the following details in the **CSR Parameters** section as described in the table:

CSR Parameters - Field and Description Table

Name	Description
Common Name	The common name of the root certificate.  Note: • Use Asterisk (*) for the host part of the FQDN to enforce the domain. For example, *.domain.com will only allow users to request certificates with domain domain.com. • Allowed Special Characters: Asterisk (*), Hyphen (-), Period (.)
Issuer Name	Name of the certificate issuer.
Algorithm	Type of the root certificate.
Hash Function	The hash function for the root certificate.
Organization Unit	Name of the Organisation unit.

Name	Description
Key Length	Key length for the root certificate.
Organization	Organization attribute for the root certificate.
Locality	Locality attribute for the root certificate.
State or Province	State attribute for the root certificate.
Country	Country attribute for the root certificate.
Email Address	Email address for the root certificate.
*: Mandatory fields	

7. Update the following details in the **Validity** section as described in the table.

Name	Description
*Start Date	Start date of the certificate issuance.
*End Date	End date of the certificate issuance.
*: Mandatory fields	

8. Click **Save**.

Once the setting is saved, the user will be directed to the root certificate submission holistic view.


9. Users can submit and fetch the root certificate.

10. On the CA setting page, user can see the status of the created setting.

Validating AppViewX CA

1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**
2. Select the **AppViewX** in the left side vendor list.
3. Click **Check** to validate the CA setting that is created.

The CA communication will be validated and the **Connection Status** will be shown as either **Success** or **Failure**.

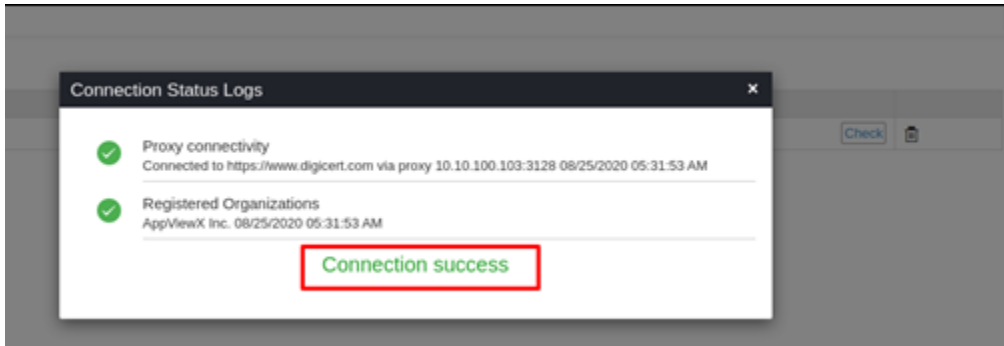

AppViewX PKIaaS CA

Configuring AppViewX PKIaaS CA

To configure the AppViewX PKIaaS CA:

1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**.
2. Click the **+Add** icon on the top right of the page.
3. Select the **AppViewX PKIaaS** in the left side vendor list.
4. Click **Configure Now**.
5. Update the following details in the **General Information** section as described in the table.

General Information - Field and Description Table

Name	Description
*Name	A unique name to identify the CA setting. No special characters other than '.', '-', '_' are allowed. The name should not start with special characters.
*Purpose/Usage	Certificate Type for which CLM actions will be enabled. For example, server and clients
Proxy Required	Enable this field if the CA communication needs to happen via Proxy. The proxy details configured in general settings will be used for communication.
Data Center	Select the data center through which the CA communication needs to happen.

Name	Description
*: Mandatory fields	

6. Update the following details in the **CA Configuration** section as described in the table.

CA Configuration Section - Field and Description Table

Options	Description
* Region	Region of the certificate.
* Configure With	The method of certificate type to upload.
* Upload JSON	Option to upload the certificate file.
* Email Address	Email address of the user.
* Project Id	ID of the project.
*: Mandatory fields	

7. Select **Fetch Procedures**.



Note: The procedures available in the AppViewX PKIaaS CA account will be fetched and listed for the specific user.

8. To map the fetched procedures, click on one or many and click the **Actions** dropdown:

- a. **CASE 1** - If the user selects Server only in Purpose and Usage, then the fetched procedure by default will be of server/client both. The Action dropdown will only have - **Map as Server**. and **MAP as Default**
- b. **CASE 2** - If the user selects Client only in Purpose and Usage, then the fetched procedure by default will be of server/client both. The Action dropdown will only have - **Map as Client**. and **MAP as Default**
- c. **CASE 3** - If the user selects Server and Client both in Purpose and Usage, then the fetched procedure by default will be of server/client both. The Action dropdown will have both the actions **Map as Client** , **Map as Server**, and **MAP as Default**


9. Click **Save**.

Validating AppViewX PKIaaS CA

Once the AppViewX PKIaaS settings are added, the validation must be done to check whether the connection between AppViewX and AppViewX PKIaaS is configured properly.

1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**
2. Select the **AppViewX PKIaaS** in the left side vendor list.
3. Click **Check** to validate the CA setting that is created.

The CA communication will be validated and the **Connection Status** will be shown as either **Success** or **Failure**.

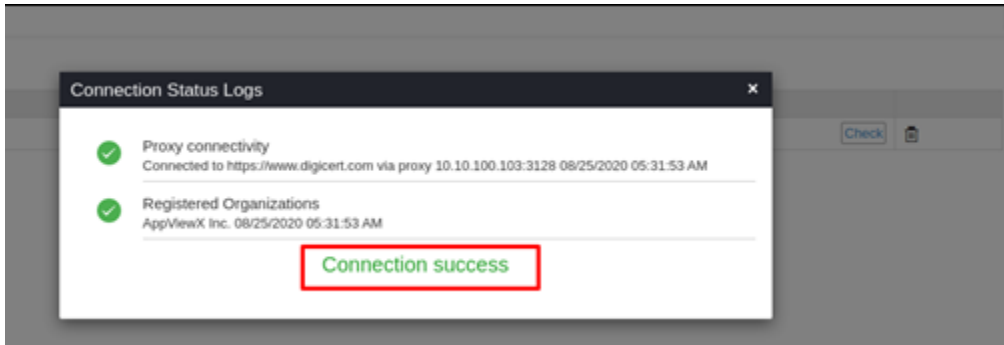

AppViewX PKIaaS Native CA

Configuring AppViewX PKIaaS Native CA

To configure the AppViewX PKIaaS CA:

1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**.
2. Click the **+Add** icon on the top right of the page.
3. Select the **AppViewX PKIaaS** in the left side vendor list.
4. Click **Configure Now**.
5. Select the **AppViewX PKIaaS Native** tab.
6. Enter the name of the CA account in the **CA Account Name** field.
7. Select **Activate**.




Note: The procedures available in the AppViewX PKIaaS CA account will be fetched and listed for the specific user.

Validating AppViewX PKIaaS CA

Once the AppViewX PKIaaS settings are added, the validation must be done to check whether the connection between AppViewX and AppViewX PKIaaS is configured properly.

1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**
2. Select the **AppViewX PKIaaS** in the left side vendor list.
3. Under the AppViewX PKIaaS Native CA tab, click **Check** to validate the CA setting that is created.

The CA communication will be validated and the **Connection Status** will be shown as either **Success** or **Failure**.

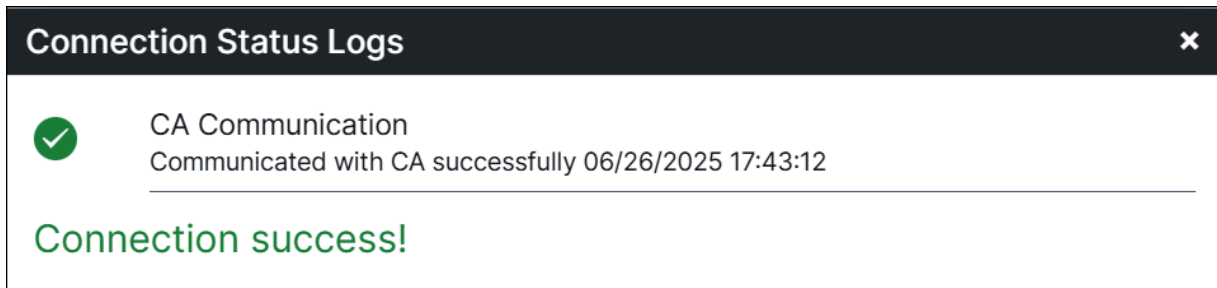

Amazon and Amazon Private CA

Prerequisites

Following are the prerequisites for configuring Amazon CA or Amazon Private CA account in AppViewX:

- An Amazon account for a user having necessary access for enrolling the certificates and other CLM operations.
- AppViewX server should either have internet access or have a proxy configured in AppViewX general settings. Check Proxy Setup for the steps to configure the proxy. <https://adminguide.appviewx.com/proxy-4>
- Policy JSON for AWS Ec2 Instance Certificate Management.
- Prerequisite for Amazon CA:

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "VisualEditor0",
      "Effect": "Allow",
      "Action": [
        "ssm:SendCommand",
        "ssm:DescribeDocument",
```

```

    "ec2:DescribeInstances",
    "ec2:DescribeRegions",
    "s3:ListBucket",
    "ssm:CreateDocument",
    "ssm:GetCommandInvocation",
    "s3:GetObject",
    "s3:ListAllMyBuckets",
    "ssm:DescribeInstanceInformation",
    "ssm:GetDocument",
    "s3:DeleteObject",
    "s3:GetBucketLocation"
  ],
  "Resource": "*"
}
]
}

// Policy JSON for Certificate Management in AWS Classic and Application LoadBalancers:
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "VisualEditor0",
      "Effect": "Allow",
      "Action": [
        "iam:GetServerCertificate",
        "elasticloadbalancing:DescribeLoadBalancers",
        "elasticloadbalancing:ModifyListener",
        "elasticloadbalancing:DescribeListeners",
        "acm:GetCertificate",
        "ec2:DescribeRegions",
        "elasticloadbalancing:DescribeTargetHealth",
        "acm:ImportCertificate",
        "elasticloadbalancing:SetLoadBalancerListenerSSLCertificate",
        "iam:UploadServerCertificate"
      ],
      "Resource": "*"
    }
  ]
}

```

```

    }
  ]
}

```

// Policy JSON for Certificate Management in AWS Cloudfront:

```

{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "VisualEditor0",
      "Effect": "Allow",
      "Action": [
        "ec2:DescribeRegions",
        "cloudfront:ListDistributions",
        "cloudfront:UpdateDistribution",
        "cloudfront:GetDistributionConfig"
      ],
      "Resource": "*"
    }
  ]
}

```

// Policy JSON for IAM Certificate Management:

```

{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "VisualEditor0",
      "Effect": "Allow",
      "Action": [
        "iam:GetServerCertificate",
        "iam:UpdateServerCertificate",
        "iam:ListServerCertificates",
        "ec2:DescribeRegions",
        "iam:UploadServerCertificate"
      ],
      "Resource": "*"
    }
  ]
}

```

```

    }
  ]
}

// Policy JSON for ACM Certificate Management:
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "VisualEditor0",
      "Effect": "Allow",
      "Action": [
        "acm:DescribeCertificate",
        "acm:RequestCertificate",
        "acm:GetCertificate",
        "ec2:DescribeRegions",
        "acm:ListCertificates",
        "acm:ImportCertificate"
      ],
      "Resource": "*"
    }
  ]
}

// Prerequisite for Amazon Private CA. Policies and Permissions required for AWS IAM User:
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "VisualEditor0",
      "Effect": "Allow",
      "Action": [
        "s3:PutObject",
        "s3:GetObjectAcl",
        "s3:GetObject",
        "s3:PutObjectAcl"
      ],
    }
  ]
}

```

```

    "Resource": [
      "arn:aws:s3:::<bucketname>",
      "arn:aws:s3:::<bucketname>/*"
    ]
  },
  {
    "Sid": "VisualEditor1",
    "Effect": "Allow",
    "Action": [
      "acm-pca:GetCertificate",
      "ec2:DescribeRegions",
      "acm-pca:GetCertificateAuthorityCertificate",
      "acm-pca:RevokeCertificate",
      "acm:RenewCertificate",
      "acm-pca:ListCertificateAuthorities",
      "acm-pca:DescribeCertificateAuthorityAuditReport",
      "acm-pca:CreateCertificateAuthorityAuditReport",
      "s3:ListAllMyBuckets",
      "acm:DescribeCertificate",
      "acm-pca:IssueCertificate",
      "acm:RequestCertificate",
      "acm:GetCertificate",
      "acm:ListCertificates",
      "acm-pca:DescribeCertificateAuthority"
    ],
    "Resource": "*"
  }
]
}

```

// AWS Simple Storage Service (S3) Bucket Policy for parsing Audit log:

```

{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Effect": "Allow",
      "Principal": {

```

```

    "Service": "acm-pca.amazonaws.com"
  },
  "Action": [
    "s3:PutObject",
    "s3:PutObjectAcl",
    "s3:GetBucketAcl",
    "s3:GetBucketLocation"
  ],
  "Resource": [
    "arn:aws:s3:::bucket_name/*",
    "arn:aws:s3:::bucket_name"
  ]
}
]
}

```

Configuring Amazon CA

To configure the Amazon CA:

1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**.
2. Select **Amazon** from the left-side vendor list.
The **Amazon** home page is displayed.
3. To configure Amazon CA, click the **ACM CA** tab from the home page.
4. Click the **Configure Now** or **+Add** icon from the middle or top-right of the page respectively.



Note: The **Configure Now** option is displayed if you are configuring a CA for the first time.

The **Amazon** configuration page is displayed.

5. Enter/Select the following details in the **General Information** section:

General Information - Field and Description Table

Field	Description
*Account Type	From the dropdown list, select one of the following account types: • Standalone (Traditional access key- and secret key-based communication) • Cross or Federated (Authentication using assume role)
*Account Name	Unique name for the certificate authority (CA) account represented during certificate enrollment and policy creation
*Account Number	Valid AWS account number
Account Description	Additional information related to the CA account being configured
*Purpose/Usage	Certificate Type for which CLM actions will be enabled. The available options are, • Server • Client.
Proxy Required	Enable this field if the CA communication needs to happen via Proxy. The proxy details configured in general settings will be used for communication.
*Default Region	Default region for API communication
*Data Center (AppViewX's CA agent)	Select the data center through which the CA communication needs to happen.
*: <i>Mandatory fields</i>	

6. Enter/Select the following **Credentials**-related information:

Credentials - Field and Description Table

Field	Description
Credential type*	From the dropdown list, from the following options, select the credential type: • Manual Entry: Manually enter the access and secret key for the customer's AWS account)
Access key*	Enter the access key for the customer's AWS account.  Note: This field is displayed only when Credential type is set to Manual Entry.
Secret key*	Enter the secret key for the customer's AWS account.  Note: This field is displayed only when Credential type is set to Manual Entry.
*: Mandatory fields	

7. Enter/Select the following details in the **Discover resources** section:

Discover Resources - Field and Description Table

Field			
Role ARN for Resource Discovery*	 Note: This field is displayed only when Account Type is Cross or Federated. To let the master account assume role for the child account (get temporary privileges to discover resource a. Click . b. Enter the following details: <table><tr><th>Field</th></tr><tr><td>Role Session name</td></tr></table>	Field	Role Session name
Field			
Role Session name			

Field								
		<table><tr><th>Field</th></tr><tr><td></td></tr><tr><td>Duration Seconds</td></tr><tr><td>External Id</td></tr><tr><td>Source Identity</td></tr><tr><td>Session Tags</td></tr></table>	Field		Duration Seconds	External Id	Source Identity	Session Tags
	Field							
	Duration Seconds							
	External Id							
	Source Identity							
Session Tags								
Service Region*	To select a service region: a. To fetch the service regions for the account information provided, click Fetch Region. The retrieved service regions are populated in the Select the Region(s) dropdown list. b. From the Select the Region(s) dropdown list, select the required service region.							
Discover Certificate	To enable instant certificate discovery at the time of device addition, select this checkbox.							

Field	
Cert Sync*	Select from one of the following options: • Managed: AppViewX will connect with the customer's AWS account and discover certificates. These certificates are managed by AppViewX. • Monitored: AppViewX will connect with the customer's AWS account and discover certificates. These certificates are monitored by AppViewX. • Ignored: AppViewX will connect with the customer's AWS account but certificate discovery will be disabled.
Auto Sync	To enable/disable automatic schedule-based synchronization: a. For Auto Sync, select the Yes checkbox. b. For Schedule based discovery, use the two dropdown lists to select a duration. For example, to schedule synchronization every 1 hour, select 1 Hour for both dropdown lists. By default, the auto sync is set to 1 Hours.  Note: The Schedule based discovery dropdown lists are displayed only when Auto Sync is enabled.
Route53 Zone Auto Approval	To support DNS validation as an automatic process, enable this toggle.  Important: If Route53 has been configured for any of the older Amazon Public CAs, ensure that, at least one, is configured for the newer Amazon Private CAs.
*: Mandatory fields	

Configuring Amazon Private CA





To configure the Amazon Private CA:

1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**
2. Select **Amazon** from the left-side vendor list.
The **Amazon** home page is displayed.
3. To configure Amazon CA, click the **AWS Private CA** tab from the home page.


The **Amazon** home page is updated to display the inventory grid as shown in the image. In the inventory grid for the Amazon Private CA, master and child account details are logged as separate entries, instead of having just one master entry.

Fields in the inventory grid are explained in the table below:

AWS Private CA - Screen Description Table

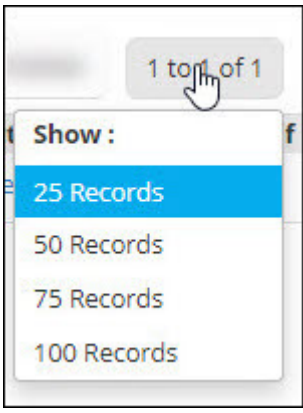Field	Description
Search	Use the Search field to search for accounts, by entering the value of one of the details listed in the inventory grid.
	To delete one or more accounts: - From the inventory grid, select the checkbox corresponding to the account(s) you want to delete. - Click .  Tip: To delete all accounts listed in the inventory grid, select the checkbox in the grid header.
	To set the number of records that should be displayed on one page: - Click . - From the Show menu displayed, select the required value. 
	If the inventory grid spans more than one page, use this control to navigate the pages, one page at a time.
Account Name	This is the unique name for the Certificate Authority (CA) account entered at the time of account creation.
Account Number	AWS account number
Account Type	Multi account: Indicates that the account is a cross account

Field	Description
	Single account: Indicates that the account is a standalone account
CA Status	For an account, after all configuration details for Amazon Private CA are entered, you will be required to click the Fetch issuer and save button to sync and discover the issuers and the respective certificates for that account. The CA Status field shows the current status of this sync and discovery process. Possible values for this field are: • Completed • In progress  Note: An account entry in the grid will be disabled till the CA Status is In progress.
Connection Status	To validate if connection has been established with the CA, click Check . If a connection has been established, this field is updated to display Success or Failure .
No. of Issuers	This field displays the number of issuers associated with the account.  Note: For a master account, this field will show the number of issuers associated with only the master account. The value does not include the number of issuers associated with the child account.
*: Mandatory fields	

4. To add an account, click **Configure Now** (if you are creating your first account) or click  from the top-right corner of the screen.

The **Amazon** page is updated to display fields for entering the CA configuration-related information.

5. On this screen, enter the following **Basic Information**:

Basic Information - Field and Description Table

Field	Description
Account type*	From the dropdown list, from the following options, select the customer's AWS account type: • Standalone: The user account and the resources are available in the same account. • Cross or Federated: Resources are available across multiple accounts and users are given role-based access.
Account name*	Enter a unique name for the Certificate Authority (CA) account that will be used during certificate enrollment and policy creation.
Account number*	Enter the customer's AWS account number.
Account Description	Enter any additional details related to the account, if required.
Purpose/ Usage*	From the dropdown list, select the purpose of the certificate that can be requested using this account.
Proxy Required	To allow all communication to the Certificate Authority (CA) to use the proxy details (provided in general settings; refer to the Platform User Guide for more details), select this checkbox.
Default Region*	From the dropdown list, select the default region for API communication.
Data Center (AppViewX's CA Agent)	From the dropdown list, select the data center that will be used to establish communication with the Certificate Authority (CA)
*: Mandatory fields	

6. Enter the following **Credentials**-related information:

Credentials - Field and Description Table

Field	Description
Credential type*	From the dropdown list, from the following options, select the credential type: • Manual Entry: Manually enter the access and secret key for the customer's AWS account)
Access key*	Enter the access key ID for the customer's AWS account. The access key and the secret access key (entered in the following field) are used together to authenticate requests.  Note: This field is displayed only when Credential type is set to Manual Entry.
Secret key*	Enter the secret access key ID for the customer's AWS account. The access key (entered in the previous field) and the secret access key are used together to authenticate requests.  Note: This field is displayed only when Credential type is set to Manual Entry.
Credential name*	If the customer's AWS credentials are stored in CyberArk, from the dropdown list, select the CyberArk credential name.  Note: This field is displayed only when Credential type is set to Credential List - CyberArk.
*: Mandatory fields	

7. In the **Discover resources** section, enter the following details:

Discover Resources - Field and Description Table

Field							
Role							
ARN for Resource							
Discovery*	 Note: This field is displayed only when Account Type is Cross or Federated. To let the master account assume role for the child account (get temporary privileges to discover resource) a. Click . b. Enter the following details: <table><tr><th>Field</th></tr><tr><td>Role Session name</td></tr><tr><td>Duration Seconds</td></tr><tr><td>External Id</td></tr><tr><td>Source Identity</td></tr><tr><td>Session Tags</td></tr></table>	Field	Role Session name	Duration Seconds	External Id	Source Identity	Session Tags
Field							
Role Session name							
Duration Seconds							
External Id							
Source Identity							
Session Tags							

Field				
Service Region*	Service regions are regions that are supported by the selected service. To select a service region: a. To fetch the service regions for the account information provided, click Fetch Region. The retrieved se b. From the Select the Region(s) dropdown list, select the required service region.			
CA Operation Mode*	From the following options, select one/both operation mode(s) for discovering all the certificates enrolled b • ACM Private CA • AWS Certificate Manager (ACM)			
S3 Bucket*	 Note: This field is displayed only when the ACM Private CA operation mode is selected. Enter the S3 bucket name.			
Role ARN for S3 Bucket	 Note: This field is displayed only when the ACM Private CA operation mode is selected for a Cros a. Click . The ARN Advanced Settings action pane is displayed. b. In the ARN Advanced Settings action pane, enter the following details: <table><tr><th>Field</th></tr><tr><td>Role Session name*</td></tr><tr><td>Duration Seconds</td></tr></table>	Field	Role Session name*	Duration Seconds
Field				
Role Session name*				
Duration Seconds				

Field	
	Field External Id Source Identity Session Tags
	c. Click Apply .
Discover Certificate	To enable instant certificate discovery at the time of device addition, select this checkbox.
CA Sync*	Select from one of the following options: • Managed: AppViewX will connect with the customer's AWS account and discover certificates. These certificates will be managed by AppViewX. • Monitored: AppViewX will connect with the customer's AWS account and discover certificates. These certificates will be managed by the customer. • Ignored: AppViewX will connect with the customer's AWS account but certificate discovery will be disabled.
Auto Sync	To enable/disable automatic synchronization, use the Auto Sync key. If Auto Sync is enabled, to set the frequency of the schedule-based sync: - From the first dropdown list, select the interval between two schedule-based syncs. - From the second dropdown, select a unit for the interval (Hours/Days). For example, to set the frequency of the schedule-based sync to every 2 hours, from the first dropdown

Field	
*: Mandatory fields	


8. Click **Fetch issuer and save**.
- AppViewX will now discover all the Private CA Certificate Authorities across the selected region(s).
 - The inventory grid on the Amazon CA home page will be populated with the properties and details retrieved from this discovery.

Validating Amazon

Once the Amazon settings are added, you need to validate the connection between AppViewX and Amazon, to make sure that the connection is properly configured.

1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**.
2. On the **Amazon** home page, select **Amazon** or **Amazon Private CA**.
3. Click **Check** to validate the CA setting that is created.

This action validates the CA communication and the **connection status** is displayed as either **Connection success** or **Failure**.

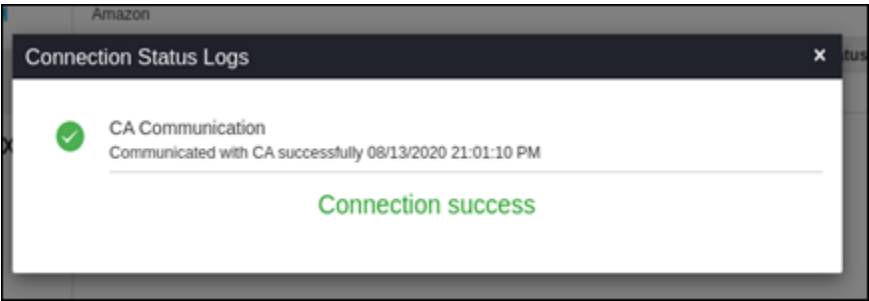

Segito CA

Configuring Segito

To configure the Segito CA:

1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**.
2. Click the **+Add** icon on the top right of the page.
3. Select the **Segito** in the left side vendor list.
4. Update the following details in the **General Information** section as described in the table:

General Information - Field and Description Table

Name	Description
*CA Account name	A unique name to identify the CA setting. Note: No special characters other than '.', '-', '_' are allowed. Names should not start with special characters.
*Purpose/Usage	Certificate Type for which CLM actions will be enabled. Example: Server, Client
Proxy Required	Enable this field if the CA communication needs to happen via Proxy. The proxy details configured in general settings will be used for communication.
Data Center (AppViewX's CA agent)	Select the data center through which the CA communication needs to happen.
*: Mandatory fields	

5. Update the following details in the **CA Configuration** section as described in the table. These fields are necessary for invoking the Segito CA APIs for Certificate Management:

CA Configuration - Field and Description Table

Name	Description
*Base URL	This URL will contain just the hostname of the Segito CA instance. For example, <https://www.segito.com>  Note: vendorSpecificSettings.url - invalid URL.
*Credential Type	Select the type of credential as desired from the dropdown list. The available options are, • Manual EntryCredential • List - CyberArk.
*Credential List	Select the required credential from the dropdown list.

Name	Description
	 Note: This field will be enabled if the Credential Type is selected as Credential List - CyberArk.
Account ID	Account id details of Segito CA Account.
*API Key	API key specific to the CA account. This API key should have required permission to make API Calls. Space is not allowed.
Auto Approve	Enable the Auto Approve option if all CLM requests from AppViewX do not need to be approved from Segito CA Account.
*: Mandatory fields	

6. Select **Fetch Divisions and Certificate Types**.

The Division and Certificate types available in the Segito CA account will be fetched.


7. Click **Save**.

Validating Segito Connection

Once the Segito settings are added, the validation must be done to check whether the connection between AppViewX and Segito is configured properly.

1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**
2. Select the **Segito** in the left side vendor list.
3. Click **Check** to validate the CA setting that is created.

The CA communication will be validated and the **Connection Status** will be shown as either **Success** or **Failure**.

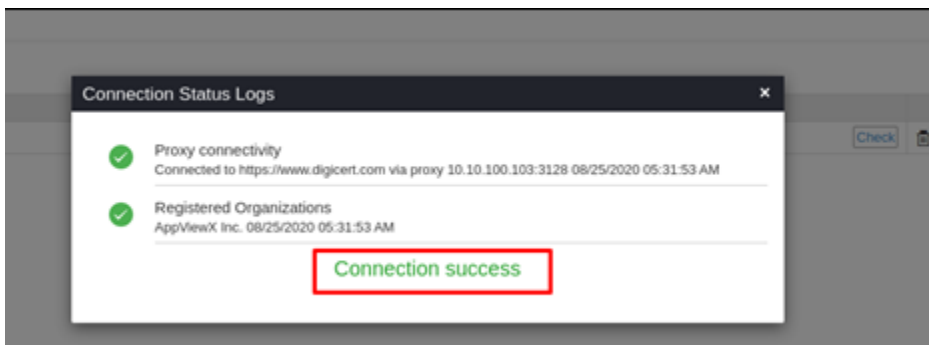

DigiCert CA

Prerequisites

Following are the prerequisites for configuring DigiCert CA account in AppViewX:

- A DigiCert CertCentral Account with **Administrator** role Access.
- **API Key** configured in DigiCert with required permissions to make API Requests from AppViewX.
- AppViewX server should either have internet access or have a proxy configured in AppViewX general settings. Check Proxy Setup for the steps to configure a proxy. <https://adminguide.appviewx.com/proxy-4>

Configuring DigiCert

To configure the DigiCert CA:

1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**.
2. Click the **+Add** icon on the top right of the page.
3. Select the **DigiCert** in the left side vendor list.
4. Update the following details in the **General Information** section as described in the table:

General Information - Field and Description Table

Name	Description
*CA Account name	A unique name to identify the CA setting. Note: No special characters other than '.', '-', '_' are allowed. Names should not start with special characters.
*Purpose/Usage	Certificate Type for which CLM actions will be enabled. Example: Server, Client
Proxy Required	Enable this field if the CA communication needs to happen via Proxy. The proxy details configured in general settings will be used for communication.
Data Center (AppViewX's CA agent)	Select the data center through which the CA communication needs to happen.

Name	Description
*: Mandatory fields	

5. Update the following details in the **CA Configuration** section as described in the table. These fields are necessary for invoking the DigiCert CA APIs for Certificate Management:

CA Configuration - Field and Description Table

Name	Description
*Base URL	This URL will contain just the hostname of the DigiCert CA instance. For example, <https://www.digicert.com>  Note: vendorSpecificSettings.url - invalid URL.
*Credential Type	Select the type of credential as desired from the dropdown list. The available options are, • Manual EntryCredential • List - CyberArk.
*Credential List	Select the required credential from the dropdown list.  Note: This field will be enabled if the Credential Type is selected as Credential List - CyberArk.
Account ID	Account id details of DigiCert CA Account, which can be found under account manager details in DigiCert CertCentral Account.
*API Key	API key specific to the CA account. This API key should have required permission to make API Calls. Space is not allowed.
Auto Approve	Enable the Auto Approve option if all CLM requests from AppViewX do not need to be approved from DigiCert CA Account.

Name	Description
 Note: Auto approval checkbox is optional and features work only for one-step certificate requests configured in the DigiCert Cert Central Account. *: <i>Mandatory fields</i>	

6. Select **Fetch Divisions and Certificate Types**.

The Division and Certificate types available in the DigiCert CA account will be fetched.

7. Click **Save**.

Validating DigiCert Connection


Once the DigiCert settings are added, the validation must be done to check whether the connection between AppViewX and DigiCert is configured properly.

1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**

2. Select the **DigiCert** in the left side vendor list.

3. Click **Check** to validate the CA setting that is created.

The CA communication will be validated and the **Connection Status** will be shown as either **Success** or **Failure**.

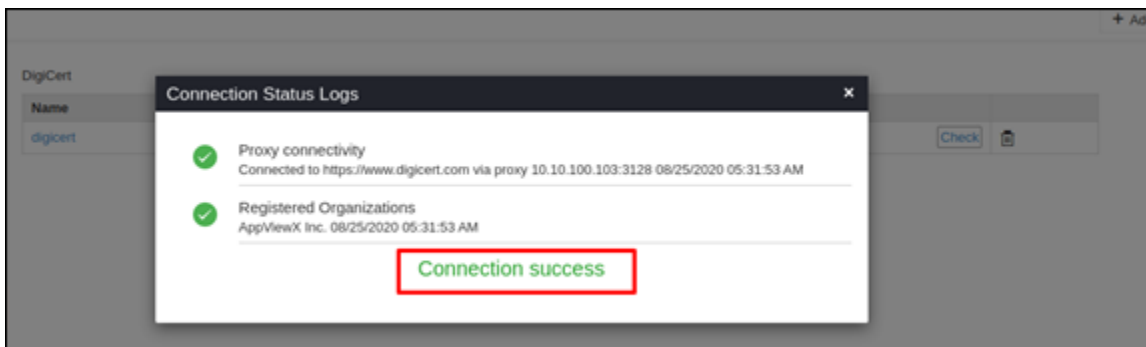

DigiCert MPKI CA

Prerequisites

The following are the prerequisites for configuring a DigiCert MPKI CA account in AppViewX:

- A DigiCert MPKI Account with **Administrator** role Access.
- An **API Key** configured in DigiCert MPKI with required permissions to make API Requests from AppViewX.
- The AppViewX server should either have internet access or have a proxy configured in AppViewX general settings. Check Proxy Setup for the steps to configure the proxy. <https://adminguide.appviewx.com/proxy-4>

Configuring DigiCert MPKI CA

To configure the DigiCert MPKI CA:

1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**.
2. Click the **+Add** icon on the top right of the page.
3. Select the **DigiCert MPKI** in the left side vendor list.
4. Update the following details in the **General Information** section as described in the table.

General Information - Field and Description Table

Name	Description
*CA Account name	A unique name to identify the CA setting. No special characters other than '.', '-', '_' are allowed. Names should not start with special characters.
*Purpose/Usage	Certificate Type for which CLM actions will be enabled. Example: Server, Client
Proxy Required	Enable this field if the CA communication needs to happen via Proxy. The proxy details configured in general settings will be used for communication.
Data Center (AppViewX's CA agent)	Select the data center through which the CA communication needs to happen.
<i>*: Mandatory fields</i>	

5. Update the following details in the **CA Configuration** section as described in the table. These fields are necessary for invoking the DigiCert CA APIs for Certificate Management.

CA Configuration - Field and Description Table

Name	Validation
*Base URL	
*Seat ID	NA.
*API Key	
 Note: *: <i>Mandatory fields</i> - Auto approval checkbox is optional and features work only for one-step certificate requests configured in the DigiCert Cert Central Account.	

6. Select **Fetch Divisions and Certificate Types**.

The Division and Certificate types available in the DigiCert CA account will be fetched and listed for the specific API key user in the table as shown below.

	End Entity Profile Names	Custom Attributes	Required	Default Value	Modifiable	Regex Pattern
☐	Ecosystem_Code_Signing	country	☒		☐	
		locality	☐		☐	
		common_name	☒		☐	
		state	☐		☐	
		postal_code	☒		☐	
☐	Ecosystem_Client	common_name	☒		☐	
		otherNameUPN	☒		☐	
		san_ipAddress	☒		☐	
		mail_email	☒		☐	
		directory_name	☒		☐	
☐	Ecosystem_Server	common_name	☐		☐	
		cert_org_unit	☐		☐	
		custom_encode_dnsName	☒		☐	
		custom_encode_dnsName_multi	☐		☐	
		san_ipAddress	☒		☐	

7. Click **Save**.




Note: The pop-up message is displayed as <CA_name> Settings Added.

Validating DigiCert MPKI Connection

Once the DigiCert MPKI settings are added, the validation must be done to check whether the connection between AppViewX and DigiCert MPKI is configured properly.

1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**
2. Select the **DigiCert** in the left side vendor list.
3. Click **Check** to validate the CA setting that is created.

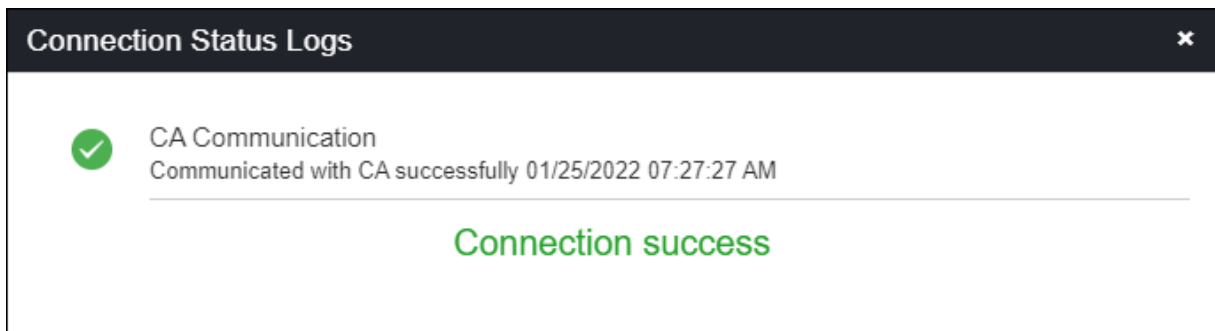

The CA communication will be validated and the **Connection Status** will be shown as either **Success** or **Failure**.

EJBCA CA

Prerequisites

Following are the prerequisites for configuring EJBCA account in AppViewX:

- An EJBCA client certificate for a user having the necessary access for enrolling the certificates and other CLM operations.
- AppViewX server should either have internet access or have a proxy configured in AppViewX general settings.

Configuring EJBCA

To configure the EJBCA CA:

1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**.
2. Click the **+Add** icon on the top right of the page.
3. Select the **EJBCA** in the left side vendor list.
4. Update the following details in the **General Information** section as described in the table:

General Information - Field and Description Table

Options	Description
*CA Account name	A unique name to identify the CA setting. Note: No special characters other than '.', '-', '_' are allowed. Names should not start with special characters.
*Purpose/ Usage	Certificate Type for which CLM actions will be enabled. Example: Server, Client.
Proxy Required	Enable this field if the CA communication needs to happen via Proxy. The proxy details configured in general settings will be used for communication.
Data Center (AppViewX's CA agent)	Select the data center through which the CA communication needs to happen.
*: Mandatory fields	

5. Update the following details in the **CA Configuration** section as described in the table. These fields are necessary for invoking the APIs for Certificate Management.

CA Configuration - Field and Description Table

Options	Description
*Client Authentication	Client authentication certificate for API communication. • Enter the valid password once the Authentication Details window is displayed. • Click OK. Note: Must be a valid <.p12> or <.pfx> file.
*URL	EJBCA URL
*Discover by expiry days	To get all the certificates that are expired and valid for specified days.

Options	Description
	 Note: Must be a number.
End entity profile names	Required end entity profiles for CA setting.
Custom attributes	Required custom attributes for the specific end entity profile.  Note: Validation can be added by the user in the regex box.
*: Mandatory fields	

6. Click **Validate and Fetch**.

The **End entity profiles** available for the CA account will be fetched along with the certificate profile from the **Certificate Authority**.

7. Update the following details in the **Certificate Attributes** section as described in the table:

Certificate Attributes Section - Field and Description Table

Options	Description
*End Entry Profile Names	Select the profile that is used in the certificate enrollment from the dropdown list.
Custom Attributes	Select the list attributes configured in CA to enroll certificates.
 Note: *: Mandatory fields - Custom attributes should be configured as exactly as it is available in the EJBCA portal.	


8. Click **Save**.

Validating EJBCA

Once the EJBCA settings are added, validation needs to be done to check whether the connection between AppViewX and EJBCA is properly configured.

1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**
2. Select the **EJBCA** in the left side vendor list.
3. Click **Check** to validate the CA setting that has been created.

The CA communication will be validated and the **Connection Status** will be shown as either **Success** or **Failure**.

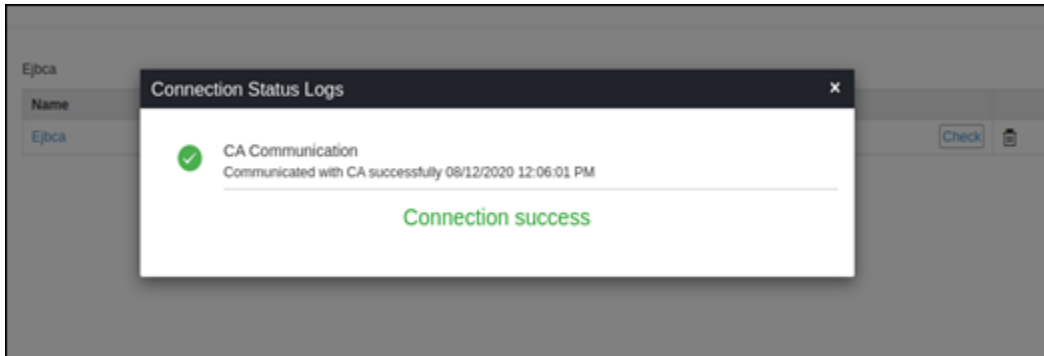

Entrust CA

Prerequisites

Following are the prerequisites for configuring Entrust CA account in AppViewX:

- An Entrust client authentication certificate and credentials having necessary access for CLM actions.
- AppViewX server should either have internet access or have a proxy configured in AppViewX general settings. Check [Proxy Setup](#) for the steps to configure the proxy.

Configuring Entrust

To configure the Entrust CA:

1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**.
2. Click the **+Add** icon on the top right of the page.
3. Select the **Entrust** in the left side vendor list.
4. Update the following details in the **General Information** section as described in the table:

General Information - Field and Description Table

Name	Description
*CA Account name	A unique name to identify the CA setting.

Name	Description
	Note: No special characters other than '.', '-', '_' are allowed. Names should not start with special characters.
*Purpose/Usage	Certificate Type for which CLM actions will be enabled. For example: Server and Client
Proxy Required	Enable this field if the CA communication needs to happen via Proxy. The proxy details configured in general settings will be used for communication.
Data Center (AppViewX's CA agent)	Select the data center through which the CA communication needs to happen.
*: Mandatory fields	

5. Update the following details in the **CA Configuration** section as described in the table. These fields are necessary for invoking the Entrust CA APIs for Certificate Management.

CA Configuration - Field and Description Table

Name	Description
*Client Authentication	The client authentication certificate from Entrust for API communication. Note: Must be a valid <.p12> file. To generate an CSR within AppViewX refer to Generating a CSR and download the CSR. Further, upload the CSR to the Entrust homepage as described in section - XXXXX.
*Base URL	This URL will contain just the hostname of the Entrust CA instance. The value is https://api.entrust.net/enterprise/v2

Name	Description
User Name	Enter the API Username to communicate with the CA.
Password	Enter the API Password to communicate with the CA.
Auto Approve	Select the checkbox to avoid queuing of new certificates in the CA portal.
*: Mandatory fields	

6. Update the following details in the **Advanced Settings** section as described in the table.

Advanced Settings - Field and Description Table

Name	Description
Poll after CSR Submission	A check box field when selected will fetch the certificated immediately after CSR Submission on enrollment, renew, and reissue of certificate with the retry count and retry frequency as described below.
*Retry Count	The number of times the polling will take place after CSR submission. Enter a value between 1 and 10.
*Retry Frequency	The duration of the polling. enter the value between 1 and 30seconds
*: Mandatory fields	

7. Click **Fetch Custom Attributes**.

The attributes available for the CA account will be fetched from the Certificate Authority along with the CA and profile names.



Note: The pop-up message is displayed as **CA and profiles fetched**.

8. Click **Save**.

The created Entrust configuration settings will be added.



Note: The pop-up message is displayed as **<CA_name> Settings Added.**


Validating Entrust CA

Once the Entrust settings are added, validation needs to be done to check whether the connection between AppViewX and Entrust is properly configured.

To validate the Entrust connection,

1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**
2. Select the **Entrust** in the left side vendor list.
3. Click **Check** to validate the CA setting that has been created.

The CA communication will be validated and the **Connection Status** will be shown as either **Success** or **Failure**.

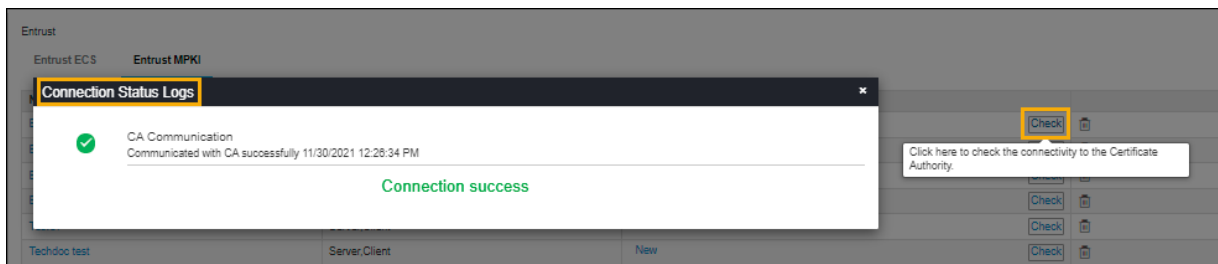

Entrust MPKI CA

Prerequisites

Following are the prerequisites for configuring Entrust MPKI CA account in AppViewX:

- An Entrust client authentication certificate and credentials having necessary access for CLM actions.
- AppViewX server should either have internet access or have a proxy configured in AppViewX general settings. Check [Proxy Setup](#) for the steps to configure the proxy.

Configuring Entrust MPKI

To configure the Entrust MPKI CA:

1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**.
2. Click the **+Add** icon on the top right of the page.
3. Select the **Entrust** in the left side vendor list, and then select the **Entrust MPKI** tab.
4. Update the following details in the **General Information** section as described in the table:

General Information - Field and Description Table

Name	Description
*CA Account name	A unique name to identify the CA setting. Note: No special characters other than '.', '-', '_' are allowed. Names should not start with special characters.
*Purpose/Usage	Certificate Type for which CLM actions will be enabled. For example: Server and Client
Proxy Required	Enable this field if the CA communication needs to happen via Proxy. The proxy details configured in general settings will be used for communication.
Data Center (AppViewX's CA agent)	Select the data center through which the CA communication needs to happen.
<i>*: Mandatory fields</i>	

5. Update the following details in the **CA Configuration** section as described in the table. These fields are necessary for invoking the Entrust MPKI CA APIs for Certificate Management.

CA Configuration - Field and Description Table

Name	Description
*Client Authentication	Client authentication certificate for API communication. Note: Must be a valid <.p12> file.

Name	Description
*Base URL	This URL will contain just the hostname of the Entrust CA instance. For example, https://api.entrust.net/enterprise/v2
*: Mandatory fields	

6. Click **Fetch CA and Profile Names**.

The attributes available for the CA account will be fetched from the Certificate Authority along with the CA and profile names.



Note: The pop-up message is displayed as **CA and profiles fetched**.

7. Click **Save**.

The created Entrust MPKI configuration settings will be added.



Note: The pop-up message is displayed as **<CA_name> Settings Added**.


Validating Entrust MPKI Connection

Once the Entrust settings are added, validation needs to be done to check whether the connection between AppViewX and Entrust is properly configured.

To validate the Entrust MPKI connection,

1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**
2. Select the **Entrust MPKI** in the left side vendor list.
3. Click **Check** to validate the CA setting that has been created.

The CA communication will be validated and the **Connection Status** will be shown as either **Success** or **Failure**.

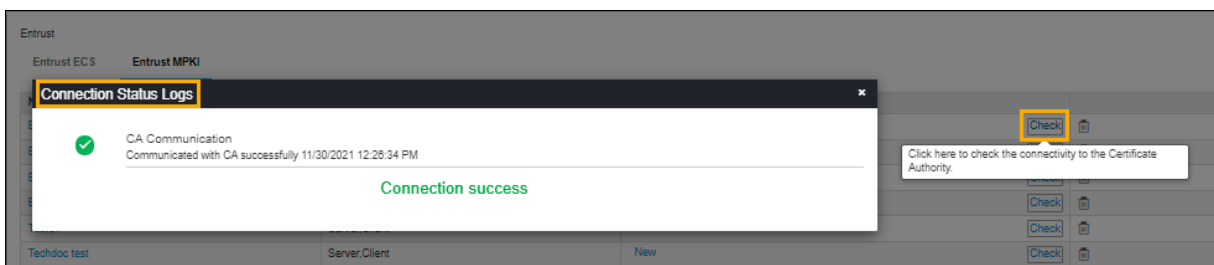

GlobalSign MSSL CA

Configuring GlobalSign MSSL CA

To configure the GlobalSign MSSL CA:

1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**.
2. Click the **+Add** icon on the top right of the page.
3. Select the **GlobalSign** in the left side vendor list, and then click the **GlobalSign MSSL** tab.
4. Update the following details in the **General Information** section as described in the table.

General Information - Field and Description Table

Name	Description
*CA Account name	A unique name to identify the CA setting. No special characters other than '.', '-', '_' are allowed. The name should not start with special characters.
*Purpose/Usage	Certificate Type for which CLM actions will be enabled. For example, server and clients
Proxy Required	Enable this field if the CA communication needs to happen via Proxy. The proxy details configured in general settings will be used for communication.
Data Center (AppViewX's CA agent)	Select the data center through which the CA communication needs to happen.
*: Mandatory fields	

5. Update the following details in the **CA Configuration** section as described in the table.:

CA Configuration Section - Field and Description Table

Options	Description
*SSL URL	Base URL of the SSL API
*User Name	Provide a username of the GCC to communicate with the CA.

Options	Description
*Password	Provide a password for the GCC to communicate with the CA.
*: Mandatory fields	

- Once all the details are configured, click **Save**.
- In GlobalSign MSSL, we can now fetch profiles and domains by clicking on the **Fetch Profiles and Domain** button.




Note: The supported CSR key types are RSA **2048-8192**, ECC **P-256**, ECC **P-384**.

Validating GlobalSign MSSL

Once the GlobalSign settings are added, validation needs to be done to check whether the connection between AppViewX and GlobalSign is properly configured.

- Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**
- Select the **GlobalSign** in the left side vendor list, and then click the **GlobalSign MSSL** tab.
- Click **Check** to validate the CA setting that is created.
- CA communication will be validated and the Connection Status will be shown as either Success or Failure.

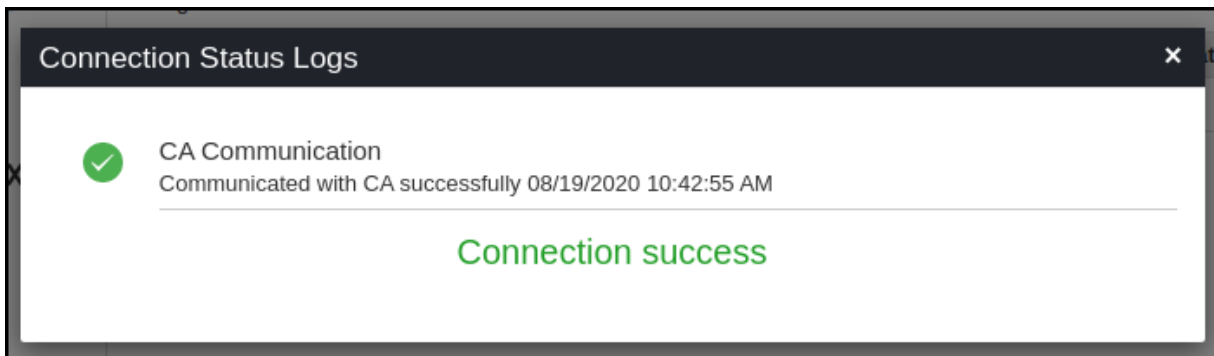

Limitations

Case/ Ticket number	Fix Description
CA Setting Update	Users need to click on the Cancel button once the MSSL domain/profile. ID details are fetched from the GlobalSign MSSL account. If the user clicks the Update button, MSSL domain/profile ID details will be removed from the associated policy. The steps to follow to update CA settings are as follows: 1. On the GlobalSign MSSL CA settings page, after adding/editing values, click the Update button. 2. Navigate back to updated CA settings and click the Fetch Profiles and Domain button. 3. Click the Cancel button instead of Update to bypass the existing issue.
Default CA policy mapping	The default CA policy is defined with all available values selected and validity data is mapped based on commonly used validity. Hence, it will not have values equivalent to API documents or CA portals. This can be modified or updated in the application accordingly to the default CA policy if changes are required.
Email Address	The email address provided in the email address field on the enrollment page is not considered as the primary email value during CLM actions, instead, the email address field defined in the contact information of the logged-in user will be used. The help info message besides the Email address field on enroll/edit page is as – “If the user email address is configured, that will be used for GlobalSign CA approval actions. If the user email is not configured, then the email address provided in this field will be used” - the second part is not valid anymore.

GlobalSign Atlas CA

Configuring GlobalSign Atlas

Before you Begin

The prerequisites for configuring GlobalSign Atlas CA are

- Login and password to access AppViewX.
- Base URL, API Key, API Secret Key.
- A client certificate provided by the GlobalSign Atlas team.

To configure the GlobalSign Atlas CA:

1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**.
2. Click the **+Add** icon on the top right of the page.
3. Select the **GlobalSign** in the left side vendor list, and then select the **GlobalSign Atlas** tab.
4. If creating a CA for the first time click **Configure Now** or click **+ Add** button on the top right.
5. Update the following details in the **General Information** section as described in the table.

General Information - Field and Description Table

Field Name	Description
*API Credential Friendly name	Enter the API Credentials Friendly name (which is the CA Account name that will be used for the CA Policy and Enrollment).
*Purpose/Usage	Select the purpose of the certificate that can be requested using this account. NOTE: Users can select <i>Server</i> , <i>Client</i> or both.
Proxy Required	Select the checkbox if communication to the Certificate Authority (CA) has to use the proxy details provided in the general settings
Data Center (AppViewX's CA agent)	Select the data center that will be used to establish the communication with the CA.
*: <i>Mandatory fields</i>	

6. Update the following details in the **CA Configuration** section as described in the table.

CA Configuration - Field and Description Table

Field Name	Description
*Base URL	Enter the base URL required for constructing the API request.

Field Name	Description
API Key	Enter the API key which is the unique identifier used to authenticate a user. NOTE: The API Key will be displayed as asterisks ()
API Secret	Enter the API secret to communicate with the CA. NOTE: The API Secret will be displayed as asterisks ()
*Client Authentication	Upload the certificate for client authentication in the .p12 or .pfx format only. The uploaded file format is invalid. Please upload in PKCS12 (.p12 or .pfx) file format only.
*: Mandatory fields	


7. Click the **Fetch Validation Policy and Save** button.

A confirmation message will appear "Validation Policy fetched and settings have been updated." and the CA is created successfully. The connection status for the CA is displayed as New.

Validating GlobalSignAtlas

Once the GlobalSign Atlas settings are added, validation needs to be done to check whether the connection between AppViewX and GlobalSign is properly configured.

1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**
2. Select the **GlobalSign** in the left side vendor list, and then select the **GlobalSign Atlas** tab.
The newly created and older settings are displayed in the grid.
3. Click **Check** to validate the CA setting that is created.
4. CA communication will be validated and the Connection Status will be shown as either Success or Failure.

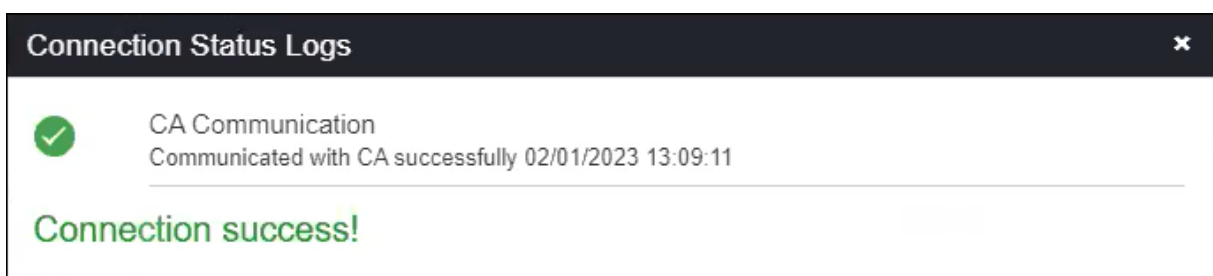

GlobalSign SSL CA

Prerequisites

Users require the **SSL URL**, **Username**, and **Password** as prerequisites for configuring the GlobalSign SSL CA in AppViewX.

- AppViewX server should either have internet access or have a proxy configured in AppViewX general settings. Refer to the section [Managing Proxy Settings](#) in the Platform guides.

1. The **SSL URL** is available on the UI. (<https://test-gcc.globalsign.com/>)
2. GlobalSign provides an **Administrator** account with a **Username** and **Password**. To configure the CA in AppViewX, administrators can create users with roles such as **Manager** or **Staff in charge**. Follow these steps:
 - a. Login to GlobalSign as administrator. (URL: <https://test-gcc.globalsign.com/au/signon/gacp/login.do>)
 - b. Go to **Account & Finance >> (MY ACCOUNT) Manage Users**.
 - c. Click **New registration**.
 - d. Enter the following mandatory details:
 - User ID
 - Password and Password (confirmation)
 - First Name
 - Last Name
 - Street Address 1
 - City
 - State or Country
 - Zip/Postal code
 - Telephone (including region code)
 - Email address
 - User Permission



Note: Administrators cannot create another admin account, a request has to be sent to GlobalSign SSL.

- e. Click **Confirm**.

Configuring GlobalSign SSL

1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**.
2. From the displayed CA, Select **GlobalSign**.
The **GlobalSign** home page is displayed.
3. Click the **GlobalSign SSL** tab.
4. Click the **Configure Now** button or **+Add** icon from the middle or top-right of the page respectively.
The **GlobalSign SSL** configuration page is displayed.
5. Update the following details in the **General Information** section as described in the table.

General Information - Field Description Table

Fields	Description
*CA Account name	A unique name to identify the CA setting. No special characters other than '.', '-', '_' are allowed. The name should not start with special characters.
*Purpose/Usage	Certificate Type for which CLM actions will be enabled. For example, Server and Client.
Proxy Required	Enable this field if the CA communication needs to happen via Proxy. The proxy details configured in general settings will be used for communication.
Data Center (AppViewX's CA agent)	Select the data center through which the CA communication needs to happen.
*: Mandatory fields	

6. Update the following details in the **CA Configuration** section as described in the table.

CA Configuration - Field Description Table


Fields	Description
*SSL URL	Base URL of the SSL API.
*User Name	Provide a username of the GCC to communicate with the CA.
*Password	Provide a password for the GCC to communicate with the CA.
*: Mandatory fields	

7. Click **Save**.

Validating GlobalSign SSL

Once the GlobalSign SSL settings are added validation needs to be done to check whether the connection between AppViewX and GlobalSign SSL is properly configured.

1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**
2. From the displayed CA, Select **GlobalSign**.
The **GlobalSign** home page is displayed.
3. Click **GlobalSign SSL** from the left pane of the page.
The **GlobalSign SSL** home page is displayed.
4. In the Status column of the grid with the listed accounts, click **Check** to validate the CA setting that is created.
CA communication will be validated and the Connection Status will be shown as either Success or Failure.

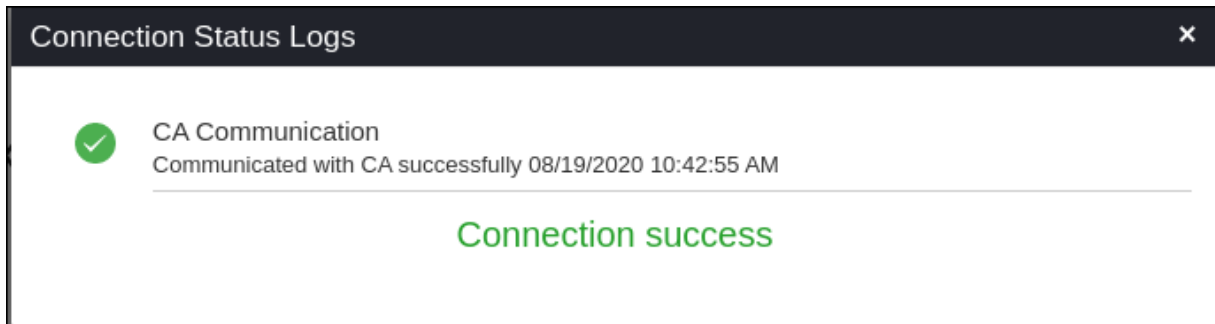

GoDaddy CA

Configuring GoDaddy

To configure the GoDaddy CA:

1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**.
2. Click the **+Add** icon on the top right of the page.
3. Select the **GoDaddy** in the left side vendor list.
4. Update the following details in the **General Information** section as described in the table:

General Information - Field and Description Table

Name	Description
*CA Account name	A unique name to identify the CA setting.

Name	Description
	Note: No special characters other than '.', '-', '_' are allowed. Names should not start with special characters.
*Purpose/Usage	Certificate Type for which CLM actions will be enabled. Example: Server, Client.
Proxy Required	Enable this field if the CA communication needs to happen via Proxy. The proxy details configured in general settings will be used for communication.
Data Center (AppViewX's CA agent)	Select the data center through which the CA communication needs to happen.
*: Mandatory fields	

5. Update the following details in the **CA Configuration** section as described in the table. These fields are necessary for invoking the GoDaddy CA APIs for Certificate Management.

CA Configuration - Field and Description Table

Name	Description
*Base URL	This URL will contain the Base URL of the GoDaddy CA API instance. For example: https://api.godaddy.com
*Customer Number	Each user will have a unique customer number which is used to obtain the certificates from the GoDaddy CA account.
*API Key	API key generated in the GoDaddy portal which is used for GoDaddy API communications.
*API Secret	API Secret generated in the GoDaddy portal which is used for GoDaddy API communications.

Name	Description
First Name	First name of the GoDaddy Account user's name as provided in the portal to be used for certificate creation purposes.
Last Name	Last name of the GoDaddy Account user's name as provided in the portal to be used for certificate creation purposes.
Email Address	Email Id of the GoDaddy Account user's name as provided in the portal to be used for certificate creation purposes. Note: Valid email address.
Phone Number	Phone number of the GoDaddy Account user as provided in the portal to be used for certificate creation purposes.  Note: Phone numbers must contain a minimum of 7 and a maximum of 15 numeric values.
*: Mandatory fields	



6. Click **Save**.

Validating GoDaddy

Once the GoDaddy settings are added validation needs to be done to check whether the connection between AppViewX and GoDaddy is properly configured. To validate GoDaddy CA,

1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**
2. Select the **GoDaddy** in the left side vendor list
The newly created and older settings are displayed in the grid.
3. Click **Check** to validate the CA setting that has been created.

The CA communication will be validated and the **Connection Status** will be shown as either **Success** or **Failure**.

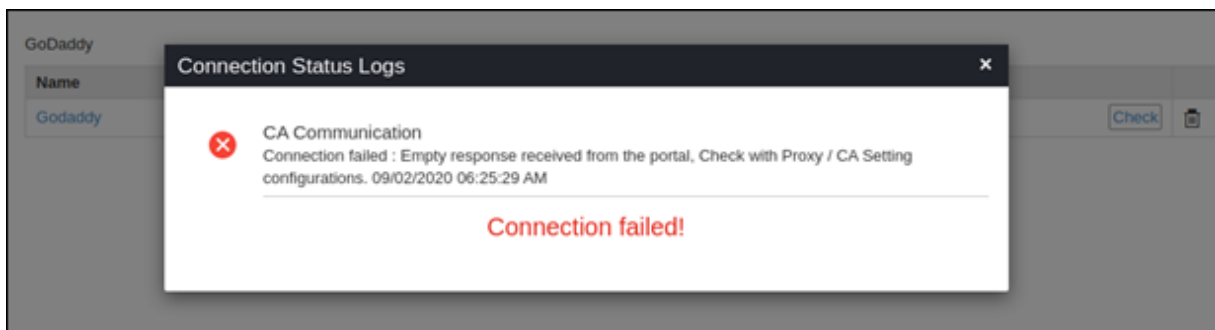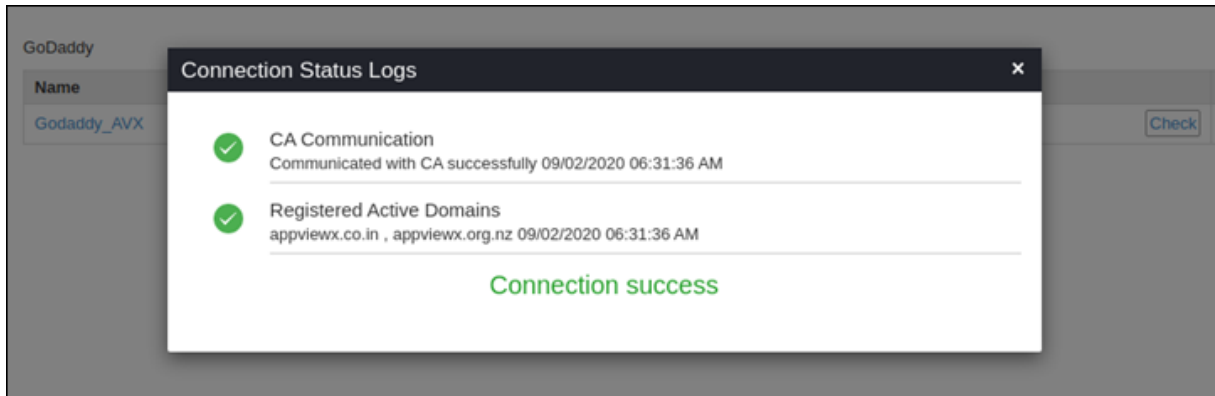

View GoDaddy Product Units

Each GoDaddy account will have different types of SSL products and units, below said steps would allow users to know the availability of the products and their remaining units.

To view the GoDaddy product units:

1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**
2. Select the **GoDaddy** in the left side vendor list
3. On the **GoDaddy** page, click **View** to fetch the product types and the units available for the GoDaddy account configured. Once clicked, users can view the available and used product units.

Google CA

Prerequisites

Following are the prerequisites for configuring a Google CA account in AppViewX:

- A Google client certificate or Google client authentication JSON for a user having necessary access for enrolling the certificates and for other Certificate Lifecycle Management(CLM) operations.
- AppViewX servers should either have internet access or have a proxy configured in AppViewX general settings.
- The URL <https://www.googleapis.com> should be reachable from AppViewX.

Configuring Google

To configure the Google CA:

1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**.
2. Click the **+Add** icon on the top right of the page.
3. Select the **Google** in the left side vendor list.
4. Click the **+Add** icon on the top right of the page.

The Google configuration page is displayed.

5. Update the following details in the **General Information** section as described in the table:

General Information - Field and Description Table

Name	Description
*CA Account name	A unique name to identify the CA setting.  Note: No special characters other than '.', '-', '_' are allowed. The name should not start with special characters.
*Purpose/Usage	Certificate Type for which CLM actions will be enabled. For example, Server and Client
Proxy Required	Enable this field if the CA communication needs to happen via Proxy. The proxy details configured in general settings will be used for communication.
Data Center (AppViewX's CA agent)	Select the data center through which the CA communication needs to happen.
<i>*: Mandatory fields</i>	

6. Configure it either Certificate Upload or JSON Upload. These fields are necessary for invoking the Google CA APIs via Certificate Upload for Certificate Management. Select the Certificate Upload check box,

CA Configuration - Field and Description Table

Options	Description
* Certificate and Key	Client authentication certificate for API communication.
* Email address	Email address of the user
* Project Id	ID of the project
*: <i>Mandatory fields</i>	


7. Select the JSON Upload check box and configure a CA. Click the Upload button to upload the JSON file.
8. Click Validate and Fetch. The issuer names available for the CA account will be fetched along with the validity of the issuers from the Certificate Authority.
9. Click **Save**.

Validating Google

Once the Google settings are added validation needs to be done to check whether the connection between AppViewX and Google is properly configured. To validate the Google CA,

1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**
2. Select the **Google** in the left side vendor list
The newly created and older settings are displayed in the grid.
3. Click **Check** to validate the CA setting that is created.

CA communication is validated and the Connection Status is shown as either Success or Failure.

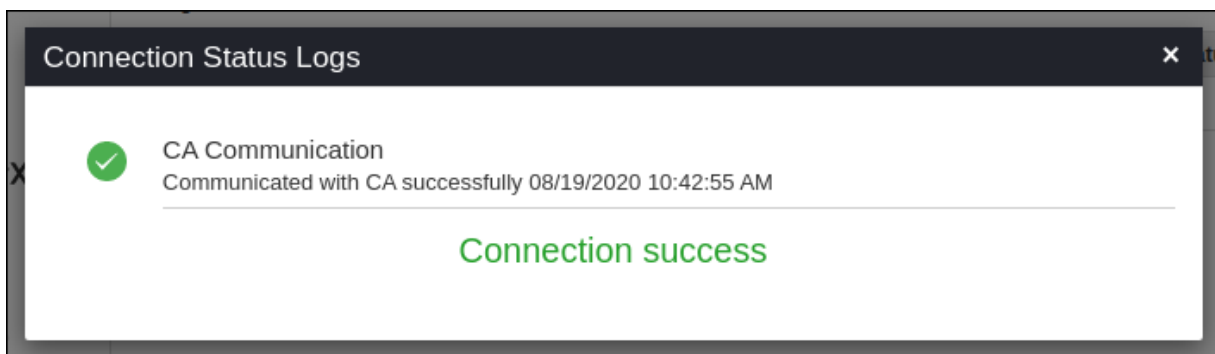

Certificate Authority Service CA

Prerequisites

Following are the prerequisites for configuring a Google CA account in AppViewX:

- A Google client certificate or Google client authentication JSON for a user having necessary access for enrolling the certificates and for other Certificate Lifecycle Management (CLM) operations.
- AppViewX servers should either have internet access or have a proxy configured in AppViewX general settings.
- The URL <https://www.googleapis.com> should be reachable from AppViewX.

Configuring Certificate Authority Service

To configure the Certificate Authority Service CA,

1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**.
2. Click the **+Add** icon on the top right of the page.
The Google configuration page is displayed.
3. Update the following details in the **General Information** section as described in the table:

General Information - Field and Description Table

Name	Description
*CA Account name	A unique name to identify the CA setting.  Note: No special characters other than '.', '-', '_' are allowed. The name should not start with special characters.
*Purpose/Usage	Certificate Type for which CLM actions are enabled. For example, Server and Client.
Proxy Required	Enable this field if the CA communication needs to happen via Proxy. The proxy details configured in general settings will be used for communication.
Data Center (AppViewX's CA agent)	Select the data center through which the CA communication needs to happen.
*: Mandatory fields	

4. Configure it either Certificate Upload or JSON Upload. These fields are necessary for invoking the Google CA APIs via Certificate Upload for Certificate Management. Select the Certificate Upload check box,

Update the following details in the **CA Configuration** section as described in the table.

CA Configuration Section - Field and Description Table


Options	Description
*Certificate and Key	Client authentication certificate for API communication.
*Email address	Email address of the user
*Project Id	ID of the project
*: <i>Mandatory fields</i>	

5. Select the JSON Upload check box and configure a CA. Click the Upload button to upload the JSON file.
6. Click Validate and Fetch. The issuer names available for the CA account will be fetched along with the validity of the issuers from the Certificate Authority.
7. Click **Save**.

Validating Certificate Authority Service

Once the Google settings are added validation needs to be done to check whether the connection between AppViewX and Google is properly configured. To validate the Google CA,

1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**
2. Select the **Google** in the left side vendor list
The newly created and older settings are displayed in the grid.
3. Click **Check** to validate the CA setting that is created.
4. CA communication will be validated and the Connection Status will be shown as either Success or Failure.

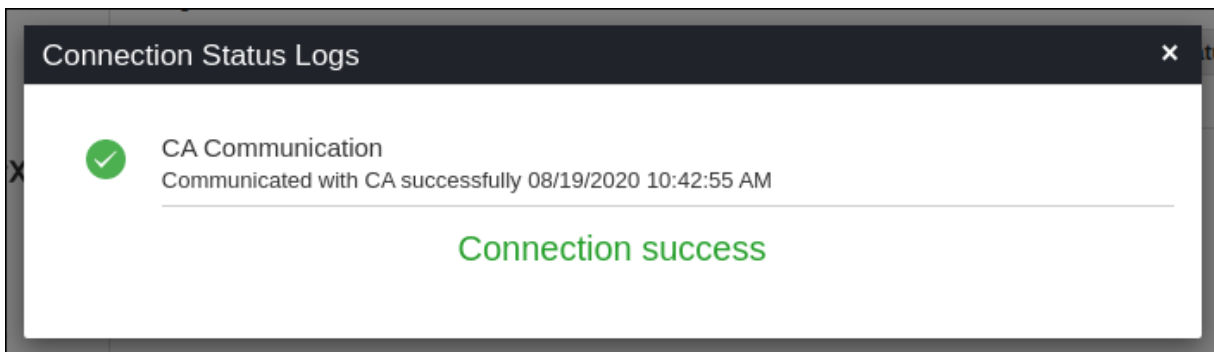

HashiCorp Vault CA

Prerequisites

The prerequisites for configuring HashiCorp Vault CA are:

- Login and password to access AppViewX.
- Base URL, Role ID, and Secret Key for the APP ROLE method and Base URL, Access Key, Secret Key, and Role Name for the AWS method in the CA Configurations.

Configuring HashiCorp Vault

Steps to Configure HashiCorp Vault CA

To configure HashiCorp Vault CA:

1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**.
2. Click the **+Add** icon on the top right of the page.
3. Select the **HashiCorp Vault** in the left side vendor list.
4. Update the details in the General Information section as described in the table below:

General Information - Field and Description Table

Field Name	Description
*CA Account name	A unique name to identify the CA setting. NOTE: No special characters other than '.', '-', and '_' are allowed. Names should not start with special characters
*Purpose/Usage	The dropdown contains checkboxes for the certificate type for which the CLM actions will be enabled.

Field Name	Description
	The values are: • Server, • Client • Code Signing One or more values can be selected depending on the type of account users need to create.
Proxy Required	Enable this field if the CA communication needs to happen via Proxy. The proxy details configured in general settings will be used for communication.
Data Center (AppViewX's CA agent)	Select the data center through which the CA communication needs to happen.
*: Mandatory fields	

5. Update the details in the **CA Configuration** section as described in the tables below. These fields are necessary for invoking the HashiCorp CA Secret Engine for Certificate Management. The fields displayed in the CA Configuration section depend on the value selected in the **Method** field. The two auth method values are:

- **APP ROLE** - The APP ROLE auth method allows machines or apps to authenticate with Vault-defined roles. An "AppRole" represents a set of Vault policies and login constraints that must be met to receive a token with those policies. An AppRole can be created for a particular machine, or even a particular user on that machine or a service spread across machines. The credentials required for successful login depend upon the constraints set on the AppRole associated with the credentials.
- **AWS** - The AWS auth method provides an automated mechanism to retrieve a Vault token for IAM principals and AWS EC2 instances. Unlike most Vault auth methods, this method does not require manual first-deploying or provisioning of security-sensitive credentials (tokens, username/password, client certificates, etc), by operators under many circumstances.

CA Configuration for App Role - Field and Description Table

Field Name	Description
*Base URL	The base of URL of the CA account. This is a user input value.
*Method	APP ROLE
*Role ID	User input value RoleID is an identifier that selects the AppRole against which the other credentials are evaluated. When authenticating against this auth method's login endpoint, the RoleID is a required argument at all times. By default, RoleIDs are unique UUIDs, which allow them to serve as secondary secrets to the other credential information.
*Secret Key	User input value Secret Key (SecretID) is a credential that is required by default for any login and is intended to always be secret. They can be created against an AppRole either via generation of a 128-bit purely random UUID by the role itself or via specific, custom values. Similarly to tokens, Secret keys have properties like usage-limit, TTLs and expirations.
*: Mandatory fields	

CA Configuration for AWS - Field and Description Table

Field Name	Description
*Base URL	The base of URL of the CA account. This is a user input value.
*Method	AWS
*Access Key	User input value

Field Name	Description
	Access Keys are used to sign the requests that are sent. Access Key and Secret Key are used for programmatic (API) access to AWS services.
*Secret Key	User input value Secret Key (SecretID) is a credential that is required by default for any login and is intended to always be secret. Similar to tokens, SecretIDs have properties like usage-limit, TTLs, and expirations.
*Role Name	User input value The basic mechanism of operation (AWS authorization workflow) is per-role. Roles are registered in the method and associated with a specific authentication type that cannot be changed once the role has been created. Roles can also be associated with various optional restrictions, such as the set of allowed policies and max TTLs on the generated tokens.
<i>*: Mandatory fields</i>	

The correct values entered in the fields establish a connection with the HashiCorp vault to be able to fetch the secret engine.

- Click the **Fetch Secret Engine** button.

A list of PKI secret engines is displayed. These will be presented to users in the policy. from where they can select the respective secret engines.

- Click **Save**.

The Account details are displayed in a grid at the bottom of the screen, with options to options to edit, check (connection status), and delete.

Editing an Account

1. Go to **Start > Certificate**, and under Advanced Configuration, click **Create a Certificate Authority**.
The list of Accounts is displayed in the grid.
2. Click the account name from the 'Name' column in the grid.
The General Information and CA Configuration sections are displayed with pre-populated values.
3. Change any of the editable fields and click the **Fetch Secret Engine** button.
4. Click the **Update** button.

Deleting an Account

1. Go to **Start > Certificate**, and under Advanced Configuration, click **Create a Certificate Authority**.
The list of Accounts is displayed in the grid.
2. In the last column of the grid with the listed accounts, click the **delete** or bin icon.
The Delete Confirmation pop-up is displayed.
3. Click **Yes**.

Validating HashiCorp Vault

To check the connection status of an account,

1. Go to **Start > Certificate**, and under Advanced Configuration, click **Create a Certificate Authority**.
The list of Accounts are displayed in the grid.
2. In the Status column of the grid with the listed accounts, click the **Check** button
The Success or Failure value is displayed.
3. Update the account details accordingly to get a "success" status.

InCommon CA

Prerequisites

Following are the prerequisites for configuring InCommon CA account in AppViewX:

- InCommon Certificate Manager credentials having necessary access for enrolling the certificates.
- AppViewX server should either have internet access or have a proxy configured in AppViewX general settings. Check Proxy Setup for the steps to configure the **proxy**. <https://adminguide.appviewx.com/proxy-4>
- Username and Password as set up in the Certificate Manager tool.

- An OrgID as provided by InCommon Certificate Manager.
- The login URL and URI.

Configuring InCommon CA

To configure the InCommon CA:

1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**.
2. Click the **+Add** icon on the top right of the page.
3. Select the **InCommon** in the left side vendor list.
4. Update the following details in the **General Information** section as described in the table:

General Information - Field and Description Table

Name	Description
*CA Account name	A unique name to identify the CA setting.  Note: No special characters other than '.', '-', '_' are allowed. The name must not start with special characters.
*Purpose/ Usage	Certificate Type for which CLM actions will be enabled. For example, Server, Client.
Proxy Required	Enable this field if the CA communication needs to happen via Proxy. The proxy details configured in general settings will be used for communication.
Data Center (AppViewX's CA agent)	Select the data center through which the CA communication needs to happen.
<i>*: Mandatory fields</i>	

5. Update the following details in the **CA Configuration** section as described in the table. These fields are necessary for invoking the InCommon CA APIs for Certificate Management.

CA Configuration - Field and Description Table

Name	Description
*Base URL	This URL will contain just the hostname of the InCommon CA instance. For example, <<customer_uri>>/ssl- here base URL is https://cert-manager.com.  Note: No special characters other than '!', '-', '_' are allowed. The name must not start with special characters.
*Login URL	URI specific to the InCommon CA Customer Account. For example, <a href="https://cert-manager.com/customer/<<customer_uri>>/ssl">https://cert-manager.com/customer/<<customer_uri>>/ssl- here URI is customer_uri.
*User Name	User name for the account created with InCommon CA.
*Password	Password for the account created with InCommon CA.
*Organization ID	InCommon supports organization hierarchy. Id of the Organization Unit/Department in which Certificates need to be managed has to be specified here. CLM actions done using this CA account will be specific to this particular organization's id/department.

Name	Description
 Note: • *: <i>Mandatory fields</i> • If the certificates from multiple organization's units/departments need to be managed, then a separate CA has to be configured for each organization unit/department in the InCommon CA setting page.	

6. Select **Fetch Certificate Types**.

The Certificate types available for the CA account will be fetched from the Certificate Authority.

7. Click **Save**.

Validating InCommon CA

Once the InCommon settings are added validation needs to be done to check whether the connection between AppViewX and InCommon is properly configured. To validate the InCommon CA,


1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**

2. Select the **InCommon** in the left side vendor list

The newly created and older settings are displayed in the grid.

3. Click **Check** to validate the CA setting that has been created.

The CA communication will be validated and the **Connection Status** will be shown as either **Success** or **Failure**.

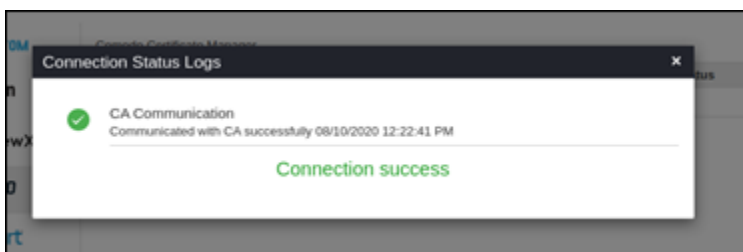

Let's Encrypt CA

Prerequisites

Following are the prerequisites for configuring Let's Encrypt CA account in AppViewX:

- AppViewX server should either have internet access or have a proxy configured in AppViewX general settings. Check Proxy Setup for the steps to configure proxy. <https://adminguide.appviewx.com/proxy-4>
- Any one of the following Let's Encrypt certificate enrolment URL as per requirement :
 1. <https://acme-staging-v02.api.letsencrypt.org> for **staging**.
 2. <https://acme-v02.api.letsencrypt.org> for **production**.

Configuring Let's Encrypt CA

To configure the Let's Encrypt CA:

1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**.
2. Click the **+Add** icon on the top right of the page.
3. Select the **Let's Encrypt** in the left side vendor list.
4. Update the following details in the **General Information** section as described in the table:

General Information - Field and Description Table

Name	Description
*Name	A unique name to identify the CA setting.  Note: No special characters other than '.', '-', '_' are allowed. The name must not start with special characters.
*Purpose/Usage	The certificate types will be managed by these settings. For now, Let's Encrypt is having only one purpose Server .
Proxy Required	Enable this field if the CA communication needs to happen via Proxy. The proxy details configured in general settings will be used for communication.
Data Center (AppViewX's CA agent)	Select the data center through which the CA communication needs to happen.
*: Mandatory fields	

5. Update the following details in the **CA Configuration** section as described in the table. These fields are necessary for invoking the Let's Encrypt CA APIs for Certificate Management.

CA Configuration - Field and Description Table

Name	Description
*Base URL	Let's Encrypt certificate enrolment URL either staging or production based on the requirement.
*Email ID(s)	Enter email ID(s) in this field to receive notifications from Let's Encrypt. Multiple email ID must be separated by comma (,).
*: Mandatory fields	

6. Click **Save**.

Validating Let's Encrypt

Once the Let's Encrypt settings are added validation needs to be done to check whether the connection between AppViewX and Let's Encrypt is properly configured. To validate the Let's Encrypt CA,

1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**
2. Select the **InCommon** in the left side vendor list
The newly created and older settings are displayed in the grid.
3. Click **Check** to validate the CA setting that has been created. The CA communication will be validated and the **Connection Status** will be shown as either **Success** or **Failure**.

Microsoft Enterprise CA

Prerequisites

Following are the prerequisites for configuring Microsoft Enterprise CA in AppViewX

AppViewX Windows Gateway installer should be installed in a windows machine, running and reachable from AppViewX vendor plugin(s) through the Communication Modes described below.

Communication Mode Table

Communication mode	Category	Windows gateway machine	Microsoft CA
NATIVE API	User account type	Service account	Service account
	User permission		Read, Request certificates, Issue and Manage certificates permission at CA level for the service account or the service account group or authenticated users Enroll permission at Certificate template level for the service account or the service account group or authenticated users
	Services	RPC service	RPC service certutil.exe command availability
	Ports		135 as the incoming port
POWERSHELL	User account type	Service account	Service account.
	User permission		Full control permission to C:\Windows\Temp Read, Request certificates, Issue and Manage certificates permission at CA level for the service account or the service account group or authenticated users
	Services	RPC Service, WinRM Service, WinRM Configuration, Powershell	RPC Service, WinRM Service, WinRM Configuration, Powershell

Communication Mode Table (continued)

Communication mode	Category	Windows gateway machine	Microsoft CA
		remoting,certutil.exe command availability	remoting,certutil.exe command availability.
	Ports		5985
WMI	User account type	Service account	Service account
	User permission		Full control permission to C:\Windows \Temp Read, Request certificates, Issue and Manage certificates permission at CA level for the service account or the service account group or authenticated users
	Services	WMI service certutil.exe command availability	WMI service certutil.exe command availability
	Ports	NA.	135, 445 or 139

Configuring Microsoft Enterprise CA

To configure the Microsoft enterprise CA:

1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**.
2. Click the **+Add** icon on the top right of the page.
3. Select the **Microsoft** in the left side vendor list, and then click the **Enterprise** tab.
4. Update the following details in the **General Information** section as described in the table:

General Information - Field and Description Table

Name	Description
*CA Account name	A unique name to identify the CA setting. Note: No special characters other than '.', '-', '_' are allowed. Names should not start with special characters.
*Purpose/Usage	Certificate Type for which CLM actions will be enabled. Example. Server, Client, Code Signing
Proxy Required	Enable this field if the CA communication needs to happen via Proxy. The proxy details configured in general settings will be used for communication.
Data Center (AppViewX's CA agent)	Select the data center through which the CA communication needs to happen.
*: Mandatory fields	

5. Update the following details in the **CA Configuration** section as described in the table.

CA Configuration - Field and Description Table

Name	Description
Windows Gateway Mode	For communicating with Windows-based devices, from the following options, select the gateway agent mode to be used: • External This mode will use the AppViewX Windows Gateway Agent that is set up on a Windows device. • Integrated This mode will use the prepackaged gateway that is integrated in the AppViewX Cloud Connector (enabled only in the SaaS and Managed Kubernetes installations). Prerequisites for using the Integrated Windows Gateway mode
*Windows Gateway URL	Enter the URL where the AppViewX agent is running.

Name	Description
*Windows Gateway Type	The mode of communication types from Windows Gateway machine to CA machine. Available types are NATIVE API , POWERSHELL , WMI . Refer Communication Mode
CA Deployment Mode	From the following options, select one that indicates how the Certificate Authority (CA) is deployed in your environment: • Standalone: Indicates a single-instance CA setup • High Availability: Indicates a clustered deployment to ensure redundancy and failure support
Client Authentication Certificate	The client certificate used while installing Windows Gateway. Users can use the default client certificate (ClientCertificateGateway.pfx) or the custom certificate given by the Customer.
*Credential Type	Type of credential to be used. Either Manual Entry or Credential List .
Username	User name of the credentials.
Password	Password for the username.
<i>*: Mandatory fields</i>	

- Click **Fetch CA Names** to retrieve CAs accessible from Windows Gateway installed machine.
Upon successful completion of Fetch CA Names, all reachable CAs listed in **Select CA**.
- Click on one specific CA and proceed.

Dynamic Fields for the Select CA Section

Name	Description
Select CA	All the reachable CAs are listed here.
*CA Machine Hostname	Host name of the CA Machine will be auto-filled.
*Secondary Hostname(s)	For a high availability CA deployment, enter the hostname/IP address of the secondary node in the HA pair. This node will take over if the primary node fails.
*CA Name	Name of the CA chosen which will be auto-filled.

Name	Description
CA Manager Approval	Approves the pending enroll / Renew request submitted from AppViewX Certificate.
*Time Zone	To perform scheduled and Optimized CA discovery, please provide time zone value.
*: Mandatory fields	

8. Enter the **Template Details** to define the Microsoft certificate templates to be used for certificate issuance by the CA.

There are two ways you can define the template details: manually enter individual details or upload a file with bulk template configuration.

To manually enter template details:

- a. Enter/Select the details for the template that will be used for certificate issuance.


Fields	Description
*MS Template Name	Enter the template that will be used for certificate issuance.
OID	Enter the Object Identifier (OID) associated with the MS template specified for certificate issuance. The OID is especially important for legacy templates because, in older Microsoft CA environments, it provides a reliable and unique identifier if the template names are ambiguous or insufficient.
*: Mandatory fields	

- b. Click **Add**.

The template details are added.

For a bulk template configuration:

- a. For reference and if required, download the sample CSV template file.

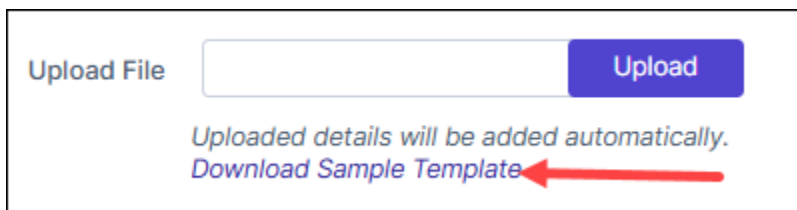


Upload File

Uploaded details will be added automatically.

[Download Sample Template](#)

- b. Update and save the CSV file for your bulk template configuration.
- c. On the **Certificate Authority** page, click **Upload**.

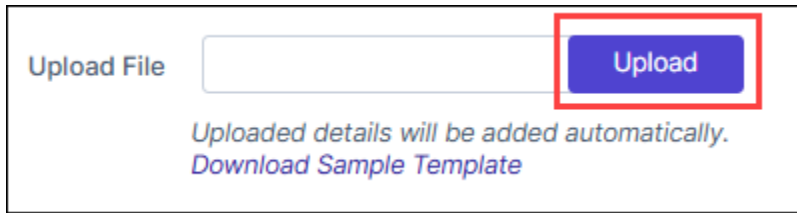

The uploaded details are automatically added.

9. Configure the **Advanced Settings** for certificate issuance.

Fields	Description
Poll after CSR submission	To automatically fetch the certificate after CSR submission for enrollment, renewal, or reissue requests, select Poll after CSR submission .
*Retry Count	Specify the number of times AppViewX will attempt to retrieve the certificate if it is not immediately available after the initial request. Minimum number of retry attempts: 1 Maximum number of retry attempts: 10
*Retry Frequency	Specify the time interval, in seconds, between consecutive retry attempts. Minimum time interval between retry attempts: 1 second Maximum time interval between retry attempts: 30 seconds
*: Mandatory fields	

10. Click **Save**.

In the CA instance inventory, the connection status is initially set to **In Progress**. Twice after this, this status is automatically checked and refreshed every 5 seconds. Once the CA instance is successfully configured, the status is updated to **Success**. Status checks after the first two times have to be done via a manual refresh.



Note: In case the connection fails, you can manually verify the connection status by clicking the **Check** button in the **Connection Status** field.

Using Native API

Using Powershell and WMI

1. Configure the **Template Details**.

Once CA is selected from the **Select CA** list, the **Template** details should have auto-filled.



Note: If the desired template is not listed, it might not be published in AD. Users can add it manually through MS Template name and OID fields.

2. In the Template Details section, select/enter the details.
3. Click **Save**.


Validating Microsoft Enterprise

Once the Microsoft Enterprise settings are added validation needs to be done to check whether the connection between AppViewX and Microsoft Enterprise is properly configured. To validate the Microsoft enterprise CA,


1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**
2. Select the **InCommon** in the left side vendor list
The newly created and older settings are displayed in the grid.
3. Click **Check** to validate the CA setting that has been created.

The CA communication will be validated and the **Connection Status** will be shown as either **Success** or **Failure**.


Success Message.

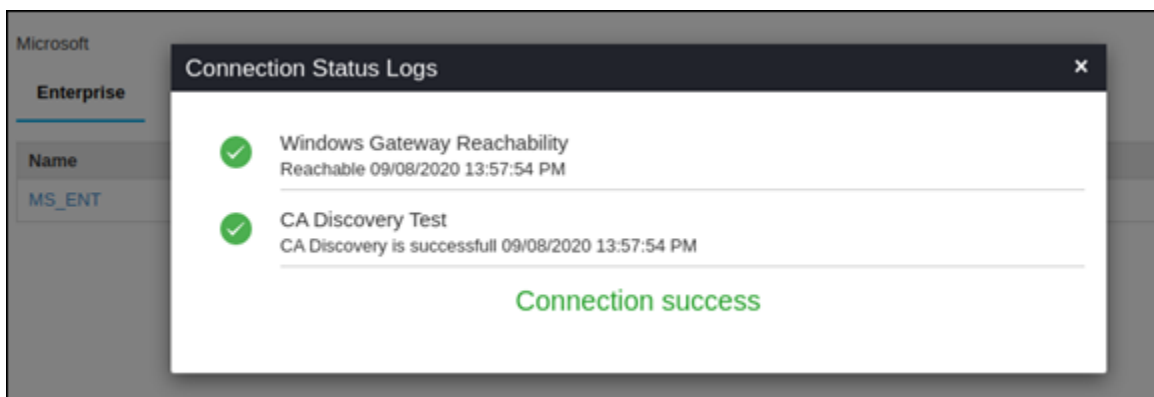


Success Scenario for Native API

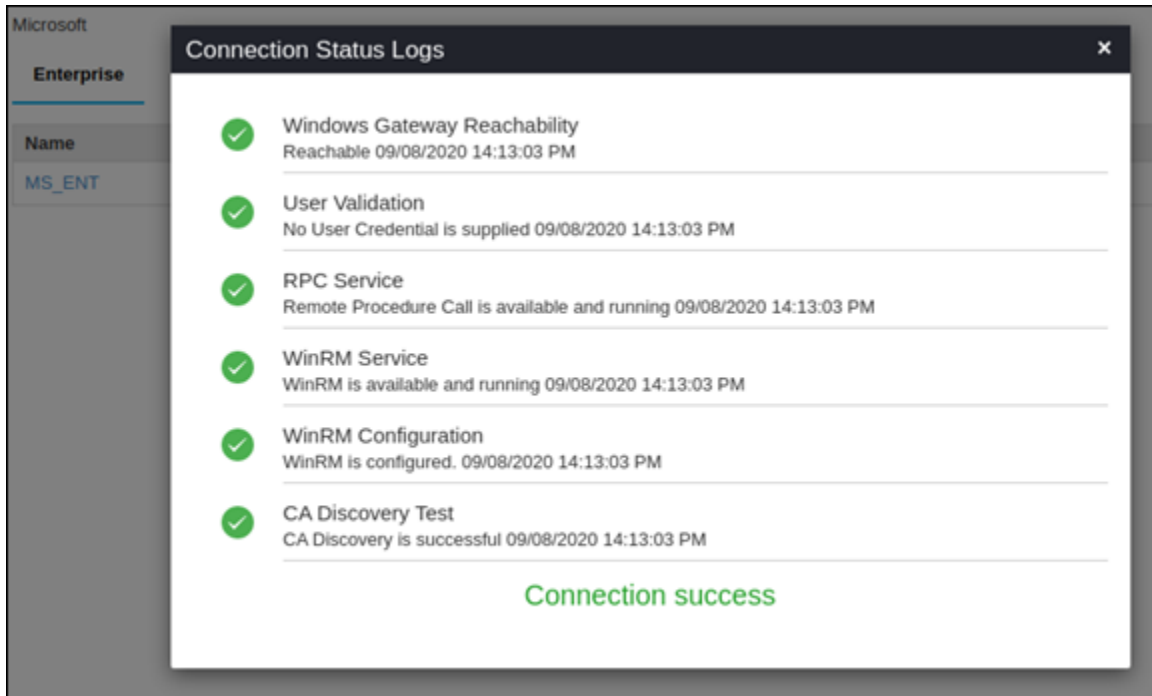

Success Scenario for Powershell

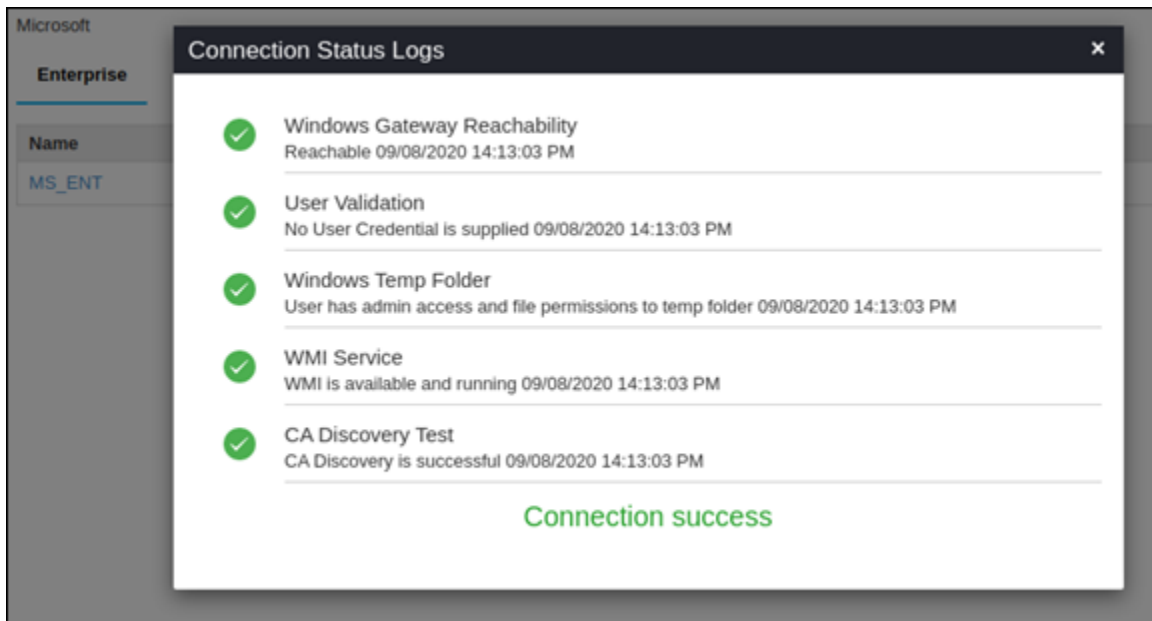

Success scenario for WMI

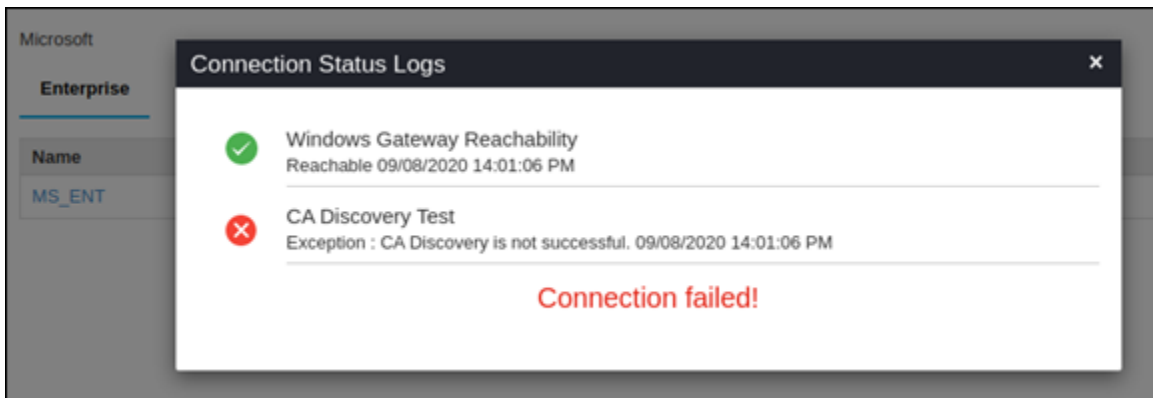

Microsoft Standalone CA

Prerequisites

The prerequisites for configuring Microsoft Standalone CA in AppViewX are as follows:

- AppViewX Windows Gateway installer should be installed in a windows machine, running and reachable from AppViewX vendor plugin through the Communication Modes described below.
- **Windows Gateway URL:** It is the registered gateway URL of the server where the windows gateway is hosted/installed. The URL format is **https://hostname:portnumber/appviewx**. For example: <https://10.10.10.10:8999/appviewx>
- **Client Authentication Certificate:** It is the certificate (.p12 or .pfx format) that is shipped with the windows gateway agent installer.
- AppViewX server should either have internet access or have a proxy configured in AppViewX general settings. Refer to the section [Managing Proxy Settings](#) in the Platform guides.

Communication Mode Table

Communication mode	Category	Windows gateway machine	Microsoft CA
NATIVE API	User account type	Service account	Service account
	User permission	NA	Read, Request certificates, Issue and Manage certificates permission at CA

Communication Mode Table (continued)

Communication mode	Category	Windows gateway machine	Microsoft CA
			level for the service account or the service account group or authenticated users Enroll permission at Certificate template level for the service account or the service account group or authenticated users
	Services	RPC service	RPC service certutil.exe command availability
	Ports	NA	135 as incoming port
POWERSHELL	User account type	Service account	Service account
	User permission	NA	Full control permission to C:\Windows\Temp Read, Request certificates, Issue and Manage certificates permission at CA level for the service account or the service account group or authenticated users
	Services	RPC Service,WinRM Service,WinRM Configuration, Powershell remoting,certutil.exe command availability	RPC Service,WinRM Service,WinRM Configuration, Powershell remoting,certutil.exe command availability
	Ports	NA	5985
WMI	User account type	Service account	Service account
	User permission	NA	Full control permission to C:\Windows\Temp

Communication Mode Table (continued)

Communication mode	Category	Windows gateway machine	Microsoft CA
			Read, Request certificates, Issue and Manage certificates permission at CA level for the service account or the service account group or authenticated users
	Services	WMI service certutil.exe command availability	WMI service certutil.exe command availability
	Ports	NA	135, 445 or 139

Configuring Microsoft Standalone CA

1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**.
2. From the displayed CA, select **Microsoft**.
The **Microsoft** home page is displayed.
3. Select the **Standalone** tab.
4. In the Status column of the grid with the listed accounts, click and then click **+Add** icon or **Configure Now** button.
5. Enter/Select the CA **General Information**.

General Information - Field Description Table

Fields	Description
Name	A unique name to identify the CA setting.  Note: No special characters other than '.', '-', '_' are allowed. Names should not start with special characters.
*Purpose/Usage	Certificate Type for which CLM actions will be enabled. For example: Server, Client, and Code Signing.

Fields	Description
Proxy Required	Enable this field if the CA communication needs to happen via Proxy. The proxy details configured in general settings will be used for communication.
Data Center (AppViewX's CA agent)	Select the data center through which the CA communication needs to happen.
*: Mandatory fields	

6. Enter/Select the **CA Configuration** details.

CA Configuration - Field Description Table

Fields	Description
Windows Gateway Mode	For communicating with Windows-based devices, from the following options, select the gateway agent mode to be used: • External This mode will use the AppViewX Windows Gateway Agent that is set up on a Windows device. • Integrated This mode will use the prepackaged gateway that is integrated in the AppViewX Cloud Connector (enabled only in the SaaS and Managed Kubernetes installations). Prerequisites for using the Integrated Windows Gateway mode
*Windows Gateway URL	For Windows Gateway Mode = External , enter the URL of the endpoint where the AppViewX Windows Gateway Agent is installed and running.
Command Execution Type	Select the command type that will be used for communication with the External AppViewX Windows Gateway Agent.  Note: The integrated gateway uses only the PowerShell command execution type and therefore, this field is not displayed when Windows Gateway Mode = Integrated.

Fields	Description
Command execution host (IP/FQDN)	 Note: This field is displayed when Windows Gateway Mode = Integrated. Enter the IP address/FQDN of the remote Windows device that the integrated gateway will use for CA communication.
*Credential Type	You will be required to enter credentials to access the command execution host/Windows device on which the gateway agent is running. From this dropdown list, select the mode through which the credentials will be entered (manually or fetched from a credential list).
Username	Enter the username for accessing the Windows device.
Password	Enter the password for accessing the Windows device.
Client Authentication Certificate	 Note: This field is displayed only when Windows Gateway Mode = External and Select gateway = New. Upload the client certificate used while installing Windows Gateway. You can use the default client certificate (ClientCertificateGateway.pfx) or a custom certificate.
*: Mandatory fields	

- Click **Fetch CA Names** to retrieve CAs accessible from Windows Gateway installed machine.
Upon successful completion of Fetch CA Names, all reachable CAs listed in **Select CA**.
- Click on one specific CA and proceed.

Dynamic Fields for Select CA Section

Fields	Description
Select CA	All the reachable CAs are listed here.
*CA Machine Hostname	Host name of the CA Machine will be auto-filled.
*CA Name	Name of the CA chosen which will be auto-filled.

Fields	Description
CA Manager Approval	Approves the pending enroll / Renew request submitted from AppViewX Certificate.
*: Mandatory fields	

9. Click **Save**.


Validating Microsoft Standalone

Once the Microsoft Standalone settings are added validation needs to be done to check whether the connection between AppViewX and Microsoft Enterprise is properly configured.


1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**.
2. From the displayed CA, select **Microsoft**.
The **Microsoft** home page is displayed.
3. Select the **Standalone** tab.
4. In the Status column of the grid with the listed accounts, click **Check** to validate the CA setting that has been created.

The CA communication will be validated and the **Connection Status** will be shown as either **Success** or **Failure**. Success scenario for Native API Success scenario for Powershell Success scenario for WMI.


Success scenario for Native API

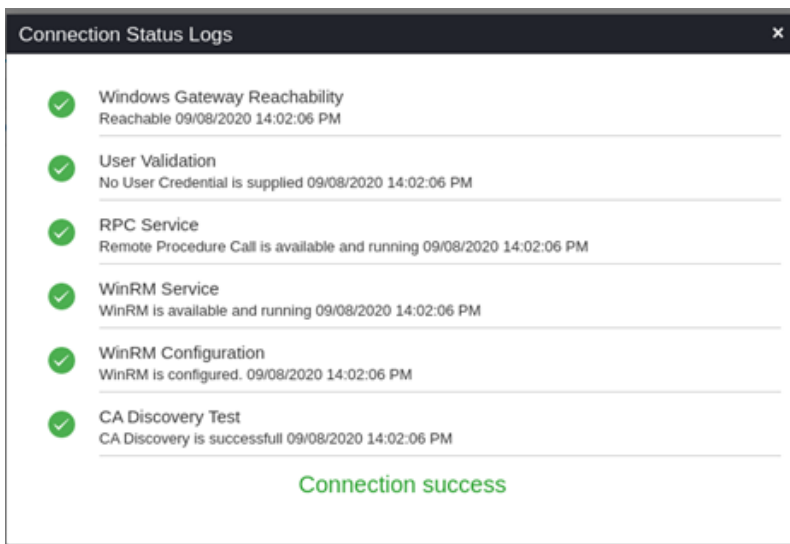

Success scenario for Powershell

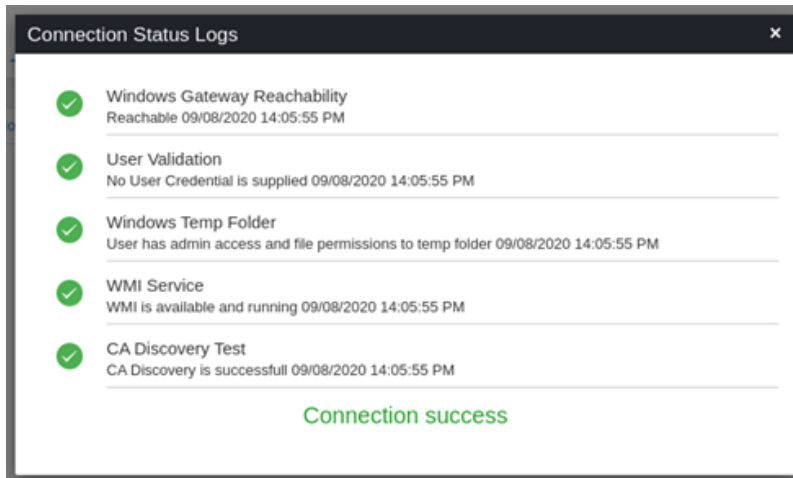

Success scenario for WMI

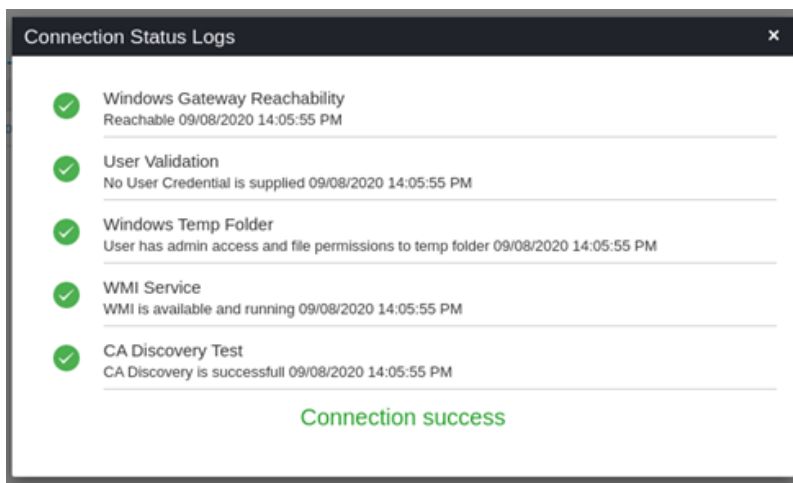

Nexus CA

Prerequisites

The following are the prerequisites for configuring a Nexus CA account in AppViewX:

- A Nexus Account with Administrator role Access.
- Before discovery or enrollment, the customer must upload the CA certificates manually.
- The AppViewX server should either have internet access or have a proxy configured in AppViewX general settings. Check Proxy Setup for the steps to configure the proxy.

Configuring Nexus CA

To configure the Nexus CA:

1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**.
2. Click the **+Add** icon on the top right of the page.
3. Select the **Nexus** in the left side vendor list.
4. Update the following details in the **General Information** section as described in the table.

General Information - Field and Description Table

Name	Description
*CA Account name	A unique name to identify the CA setting. No special characters other than '.', '-', '_' are allowed. The name should not start with special characters.
*Purpose/Usage	Certificate Type for which CLM actions will be enabled. For example, server and clients
Proxy Required	Enable this field if the CA communication needs to happen via Proxy. The proxy details configured in general settings will be used for communication.
Data Center (AppViewX's CA agent)	Select the data center through which the CA communication needs to happen.
*: Mandatory fields	

5. Update the following details in the **CA Configuration** section as described in the table.

CA Configuration Section - Field and Description Table

Options	Description
*SSL URL	Base URL of the SSL API
*User Name	Provide a username of the GCC to communicate with the CA.
*Password	Provide a password for the GCC to communicate with the CA.
*: Mandatory fields	

6. Select **Fetch Procedures**.




Note: The procedures available in the Nexus CA account will be fetched and listed for the specific user.

7. To map the fetched procedures, click on one or many and click the **Actions** dropdown:
 - a. **CASE 1** - If the user selects Server only in Purpose and Usage, then the fetched procedure by default will be of server/client both. The Action dropdown will only have - **Map as Server.** and **MAP as Default**
 - b. **CASE 2** - If the user selects Client only in Purpose and Usage, then the fetched procedure by default will be of server/client both. The Action dropdown will only have - **Map as Client.** and **MAP as Default**
 - c. **CASE 3** - If the user selects Server and Client both in Purpose and Usage, then the fetched procedure by default will be of server/client both. The Action dropdown will have both the actions **Map as Client** , **Map as Server**, and **MAP as Default**
8. Click **Save**.

Validating Nexus

Once the Nexus settings are added, the validation must be done to check whether the connection between AppViewX and Nexus is configured properly.

1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**
2. Select the **Nexus** in the left side vendor list
The newly created and older settings are displayed in the grid.
3. Click **Check** to validate the CA setting that is created.
4. The CA communication will be validated and the Connection Status will be shown as either Success or Failure.

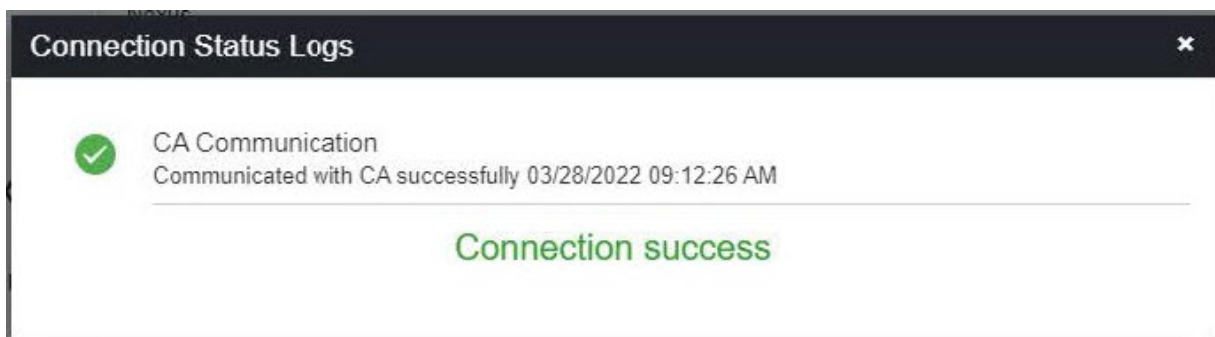

OpenTrust CA

Configuring OpenTrust CA

To configure the OpenTrust CA:

1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**.
2. Click the **+Add** icon on the top right of the page.
3. Select the **OpenTrust** in the left side vendor list.
4. Update the following details in the **General Information** section as described in the table:

General Information - Field and Description Table

Name	Description
*CA Account name	A unique name to identify the CA setting. Note: No special characters other than '.', '-', '_' are allowed. Names should not start with special characters.
*Purpose/Usage	Certificate Type for which CLM actions will be enabled. For example: Server and Client
Proxy Required	Enable this field if the CA communication needs to happen via Proxy. The proxy details configured in general settings will be used for communication.
Data Center (AppViewX's CA agent)	Select the data center through which the CA communication needs to happen.
*: Mandatory fields	

5. Update the following details in the **CA Configuration** section as described in the table. These fields are necessary for invoking the OpenTrust CA APIs for Certificate Management.

CA Configuration - Field and Description Table

Name	Description
*Client Authentication	Client authentication certificate for API communication.

Name	Description
	Note: Must be a valid <.p12> file.
*Base URL	This URL will contain just the hostname of the OpenTrust CA instance. Eg - https://api.opentrust.net/enterprise/v2
*: Mandatory fields	

6. Click **Fetch CA and Profile Names**.

The attributes available for the CA account will be fetched from the Certificate Authority along with the CA and profile names.



Note: The pop-up message is displayed as **CA and profiles fetched**.

7. Click **Save**.

The created OpenTrust configuration settings will be added.



Note: The pop-up message is displayed as **<CA_name> Settings Added**.


Validating OpenTrust Connection

Once the OpenTrust settings are added, validation needs to be done to check whether the connection between AppViewX and OpenTrust is properly configured.

To validate the OpenTrust connection,

1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**
2. Select the **OpenTrust** in the left side vendor list.
3. Click **Check** to validate the CA setting that has been created.

The CA communication will be validated and the **Connection Status** will be shown as either **Success** or **Failure**.

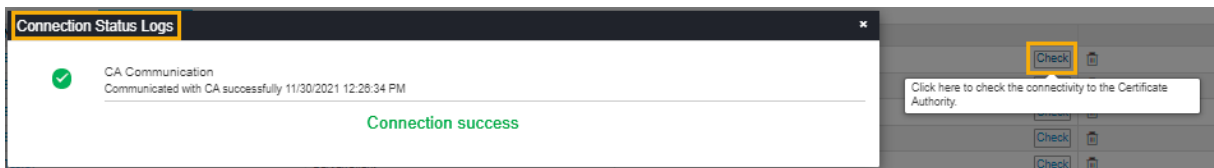

Symantec CA

Prerequisites

Following are the prerequisites for configuring a Symantec account in AppViewX:

- A Symantec client certificate for a user having the necessary access for enrolling the certificates and other Certificate Lifecycle Management(CLM) operations.
- AppViewX server should either have internet access or have a proxy configured in AppViewX general settings. Check Proxy Setup for the steps to configure proxy. <https://adminguide.appviewx.com/proxy-4>
- Symantec users should be associated with the role “**w=VICE2 web services application**”.
- Required organization status should be “valid”.
- If the EV certificate type is enabled, then the EV status of the organization should be “Yes”.
- The required domain should be registered with the organization.
- The required certificate types should be enabled with the required values in the portal.
- Unit values should be available for the required certificate type.

Configuring Symantec CA

To configure the Symantec CA:

1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**.
2. Click the **+Add** icon on the top right of the page.
3. Select the **Symantec** in the left side vendor list.
4. Update the following details in the **General Information** section as described in the table.

General Information - Field and Description Table

Name	Description
*CA Account name	A unique name to identify the CA setting.  Note: No special characters other than ‘:’, ‘-’, ‘_’ are allowed. The name must not start with special characters.
*Purpose/Usage	Certificate Type for which CLM actions will be enabled. For example, Server and Client.

Name	Description
Proxy Required	Enable this field if the CA communication needs to happen via Proxy. The proxy details configured in general settings will be used for communication.
Data Center (AppViewX's CA agent)	Select the data center through which the CA communication needs to happen.
*: Mandatory fields	

5. Update the following details in the **CA Configuration** section as described in the table. These fields are necessary for invoking the Symantec CA APIs for Certificate Management.

CA Configuration - Field and Description Table

Name	Description
*Certificate and Key	Client authentication certificate for API communication.  Note: Must be a valid <.p12> or <.pfx> file.
*URL	Symantec URL used for API communications. For example, https://certmanager-webservices.websecurity.symantec.com/vswebservices/
*Jurisdiction hash	Jurisdiction hash of the Symantec account. Available in the top right corner of the Symantec portal.
*First name	First name of the user.
*Last name	Last name of the user.
*: Mandatory fields	

6. Click **Save**.


Validating Symantec

Once the Symantec settings are added validation needs to be done to check whether the connection between AppViewX and Symantec is properly configured. To validate the Symantec CA,


1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**
2. Select the **Symantec** in the left side vendor list
3. Click **Check** to validate the CA setting that has been created.

The CA communication will be validated and the **Connection Status** will be shown as either **Success** or **Failure**.

Success Scenario

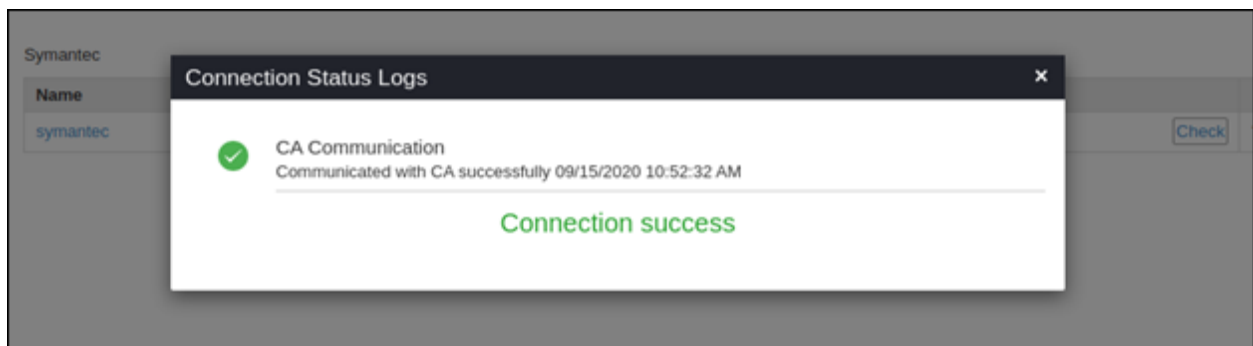

Failed Scenario

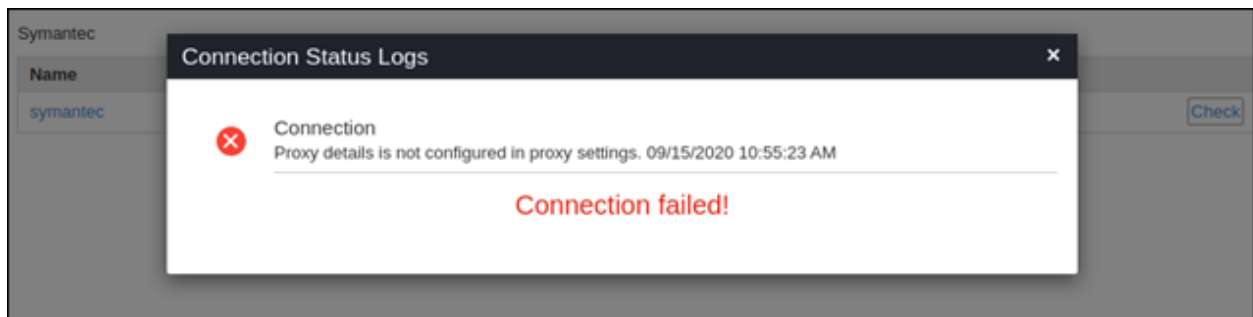

Trustwave CA

Prerequisites

Following are the prerequisites for configuring Trustwave CA in AppViewX:

- Trustwave API URL. Ex: <https://testapi.ssl.trustwave.com/3.0/>
- Reachability from AppViewX southbound to Trustwave API URL via proxy or direct internet connection
- Valid credentials for communicating to Trustwave CA via API
- Reseller id
- Account details provided in Trustwave account such as Organization Name, Email address, Organization Address, City, State, Zip code, Country, Phone number
- AppViewX server should either have internet access or have a proxy configured in AppViewX general settings. Check Proxy Setup for the steps to configure the proxy. <https://adminguide.appviewx.com/proxy-4>

Configuring Trustwave CA

To configure the Trustwave CA,

1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**.
2. Click the **+Add** icon on the top right of the page.
3. Select the **Trustwave** in the left side vendor list.
4. Configure the **General Information** details as follows:
 - a. **CA Account name** - Provide an account name for the CA setting.
 - b. **Purpose/Usage** - Choose the certificate categories that will be managed by this setting. Possible certificate categories could be:
 - i. Server
 - ii. Code Signing
 - c. **Proxy Required** - Enable this field if the CA communication needs to happen via **Proxy**.
 - d. Choose the appropriate **Data Center**.
5. Configure the **CA Configuration** with information you want to configure:
 - a. **API URL**: The Trustwave API URL to communicate. Ex: <https://testapi.ssl.trustwave.com/3.0/>
 - b. **Username**: The username for API authentication.
 - c. **Password**: The password for API authentication.
 - d. **Reseller ID**: The Reseller Id for the account.
6. Configure the **Account Details** with information you want to configure:
 - a. **Name**: The Organization name given in the Trustwave account.
 - b. **Email Address**: The Administrator or organization email address given in the Trustwave account.
 - c. **Address**: The Organization Address given in the Trustwave account.
 - d. **City**: The city name given in the Trustwave account.
 - e. **State**: The state name given in the Trustwave account.
 - f. **Zip code**: The zip code given in the Trustwave account.

g. **Country**: The country code given in the Trustwave account. Ex: US.

h. **Phone number**: The phone number given in the Trustwave account.

7. Click **Save**.

Validating Trustwave

Once the Trustwave settings are added validation needs to be done to check whether the connection between AppViewX and Trustwave is properly configured. To validate the Trustwave CA,


1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**

2. Select the **Trustwave** in the left side vendor list

The newly created and older settings are displayed in the grid.

3. Click **Check** to validate the CA setting that is created.

The CA communication will be validated and the **Connection Status** will be shown as either **Success** or **Failure**.

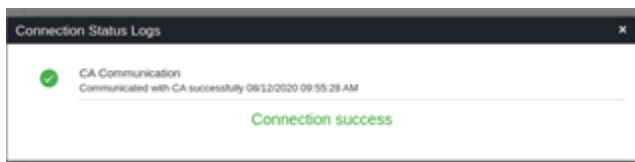


Creating the CA Policy

A CA policy is needed to define certificate requirements and ensure that certificates issued by the Certificate Authority (CA) adhere to these requirements.

On the CA Policy page,

- refresh the list, click the  (refresh) icon.
- go to the pages, click the  (navigation) icon.

- hover the mouse over the number of rows displayed on the page, the Show popup opens and choose the no. of rows to be displayed on the page.

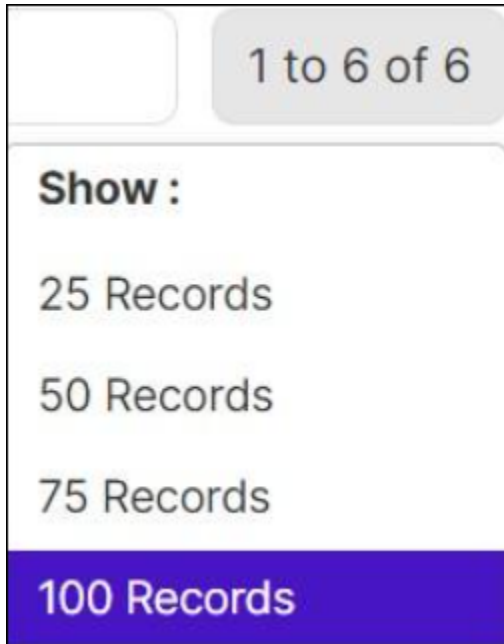

To define a CA policy:

1. Determine certificate requirements (key size, algorithm, validity).
2. Create a policy document outlining requirements and management procedures.
3. Configure your CA to enforce the policy.
4. Map the policy to certificate groups (by business unit, etc.).

To create a policy / view the list of policies/policy, go to **menu > KUBE+ > Groups & Policies > CA Policy**.

- [Configuring Policy Details](#)
- [Configuring Policy for Amazon CA](#)
- [Configuring Policy for Amazon Private CA](#)
- [Configuring AppViewX CA](#)
- [Configuring AppViewX PKIaaS CA](#)
- [Configuring Policy for DigiCert CA](#)
- [Configuring Policy for EJBCA CA](#)
- [Configuring Policy for Entrust CA](#)
- [Configuring Policy for Entrust MPKI CA](#)
- [Configuring Policy for GlobalSign Atlas CA](#)

- [Configuring Policy for GlobalSign CA](#)
- [Configuring Policy for GlobalSign MSSL CA](#)
- [Configuring Policy for GoDaddy CA](#)
- [Configuring Policy for Google CA](#)
- [Configuring Policy for HashiCorp Vault CA](#)
- [Configuring Policy for Hydrant ID CA](#)
- [Configuring Policy for Let's Encrypt CA](#)
- [Configuring Policy for Microsoft Enterprise CA](#)
- [Configuring Policy for Microsoft Standalone CA](#)
- [Configuring Policy for Nexus CA](#)
- [Configuring Policy for OpenTrust CA](#)
- [Configuring Policy for Symantec CA](#)
- [Configuring Policy for Trustwave CA](#)
- [Configuring a CA Policy for Futurex](#)
- [Deleting a Policy](#)

Configuring Policy Details


To configure a policy:


1. Go to **menu > KUBE+ > Groups & Policies > CA Policy**.

On the **CA Policy** page, the configured policies are displayed, if any.



Note: KUBE+ is packaged with default policies they are Default and Certificate-Gateway.

 + Create

2. Click  on the menu bar.
3. On the **CA Policy : Create** page, enter/select the field information for the **Policy Details** section.

Field and Description for the Policy Details Section

Name	Description
*Policy name	Provide a unique name to identify the CA policy name.

Name	Description
	 Note: No special characters other than '.', '-', '_' are allowed. The name should not start with special characters.
Description	Provide a description of the policy.
*Policy Enforcement Type	Select a policy enforcement type. The options are: • Strict (default) - This enforces the standards defined in the policy where a user cannot modify any parameters. • Suggestive - This suggests users with policy parameters. A user can modify suggested values if required.
Certificate Requests Need Approval	When enabled, it will enforce the peer approval process for any requests made for new/renew/regenerate/reissue or revocation of certificates. Peer approving the request is defined in the approval workflow.
Enable Access to Private Key	When enabled allows the user to download private keys from the holistic view.
Enable certificate push-bind access for a read-only user	Enabling the option might allow the user with the read-only user group to perform certificate push, bind, and rollback operations from the holistic view.
Validate issuer and root certificate for compliance	Enabling the option would validate if the Issuer and Root of the certificate are also compliant with the standard defined in the policy.
*: Mandatory fields	

4. In the **CA details**, select a certificate authority, fill the necessary details, and then click **Save CA Details**.
5. In the **Group selection** section, select a group(s) to apply the policy to all the certificates for the selected group.



Note: Additionally, you can find the preferred group(s) by entering the search key word in the **Search** field. The search key words can be added as Favorites for future use.

6. In the **Compliance Check** section, you can enable the **Perform Compliance check** option to perform an immediate compliance check.



Note: Scheduled Compliance check will run periodically based on the Job scheduler settings.

7. Click **Create Policy**.

Configuring Policy for Amazon CA

To configure an Amazon CA policy:

1. Go to **menu > KUBE+ > Groups & Policies > CA Policy**.

On the **CA Policy** page, the configured policies are displayed, if any.



Note: KUBE+ is packaged with default policies they are Default and Certificate-Gateway.

2. Click **+ Create** on the top-right of the page.
3. Refer [Configuring Policy Details](#) to configure the following:
- **Policy Details** section
 - **Group Selection** section
 - **Compliance Check** section
4. On the **CA Policy: Create** page, click **Amazon** under the **CA details** on the left side of the screen.

CA Details for Amazon Policy

Name	Description
*CA Accounts	The Amazon CA accounts configured in the CA settings screen are listed. Select a CA account from the list to create the policy.
*: Mandatory fields	

5. Click **Add**.
6. You can use the delete icon against the CA account to delete the configuration.

Certificate Parameter - Field and Description Table

Field	Description
Host Name	Enter the host name.

Field	Description
Allowed Domain Names	As you type the domain name, the matching domain names are displayed. Select the desired domain names.
Common Name	You can provide the common name. For example, *.domain.com It helps enforce domains for which a certificate can be requested. Common Name is enforced while performing any certificate request operations such as New, Renew, Regenerate.  Note: Use Asterisk (*) for the host part of the FQDN to enforce the domain. For example, *.domain.com will only allow users to request certificates with domain.com. Allowed Special Characters: Asterisk (*), Hyphen (-), Period (.)
Subject Alternative Name	You can provide the subject alternative name (SAN). It helps enforce additional domains for which a certificate can be requested. Subject Alternative Name is enforced while performing certificate request operations such as New, Renew, and Regenerate.

Field	Description
	 Note: Use Asterisk (*) for the host part of the FQDN to enforce the domain. For example, *.domain.com will only allow users to request certificates with domain domain.com. Allowed Special Characters: Asterisk (*), Hyphen (-), Period (.), At (@)

7. Click **Save CA Details** to save the configuration. A green tick mark will be displayed in the **Certificate Authority** pane against the **Amazon** option to indicate the details are successfully stored.

8. Click **Create Policy**.

The policy is created and a confirmation message displays.

Configuring Policy for Amazon Private CA

- You must configure the CA setting with Amazon Private CA credentials.
- You must have validated and fetched the Amazon Intermediate CAs along with the issuer region details in the CA settings page.

To configure an Amazon Private CA policy:

1. Go to **menu > KUBE+ > Groups & Policies > CA Policy**.

On the **CA Policy** page, the configured policies are displayed, if any.



Note: KUBE+ is packaged with default policies they are Default and Certificate-Gateway.

2. Click **+ Create** on the top-right of the page.
3. Refer [Configuring Policy Details](#) section to configure the following,
 - **Policy Details**
 - **Group Selection**
 - **Compliance Check**
4. On the **CA Policy: Create** page, click **Amazon Private CA** in the **Certificate Authority** pane on the left side of the page.

CA Details - Field and Description Table

Field	Description							
*CA Account	Select the certificate authority account.							
*Issuer Region	Select the issuer region from the dropdown list.							
*Issuer Name	Select the issuer name from the dropdown list.							
*Validity	Enter the validity period for the certificate. The available options are: • Days - You can enter more than one validity period in days, to choose one in certificate enrolment. • Month - You can enter more than one validity period in Months, to choose one in certificate enrolment. • Year - You can enter more than one validity period in Year, to choose one in certificate enrolment.							
*Bit Length - Key Type	All the Key Types are listed with corresponding Bit Length. You can select one or more than one Bit Length - Key Type from the dropdown list. The discovered certificate's Key Type and Bit length will be compared against the selected Bit Length - Key Type(s) to identify if they are complaint with the policy. Selected Bit Length - Key Type(s) is enforced while performing any certificate request operations such as New, Renew, Regenerate. The Amazon Private CA supports below Bit type and Length. <table> <tr> <th>Type</th><th>Length</th></tr> <tr> <td rowspan="2">RSA</td><td>2048</td></tr> <tr> <td>4096</td></tr> <tr> <td>EC</td><td>prime256v1 sec384r1</td></tr> </table>	Type	Length	RSA	2048	4096	EC	prime256v1 sec384r1
Type	Length							
RSA	2048							
	4096							
EC	prime256v1 sec384r1							

Field	Description
*Hash Function	Supported Hash Function(s) are listed. You can select one or more than one Hash Function from the dropdown list. The supported hash functions are: • SHA256 • SHA384 • SHA512.
*Signature Algorithm	Select the SignAlgorithm from the dropdown list. The available options are: • SHA256WITHECDSA • SHA384WITHECDSA • SHA512WITHECDSA • SHA256WITHRSA • SHA384WITHRSA • SHA512WITHRSA.  Note: The Issuer will print the issuer algorithm that the users selected in the Signature Algorithm field.
*: Mandatory fields	

5. In the **Certificate parameters** section, enter/select the following details.

Certificate parameters - Field and Description Table

Field	Description
Common Name	You can provide the common name. For example, *.domain.com. It helps enforce domains for which a certificate can be requested. Common Name is enforced while performing any certificate request operations such as New, Renew, Regenerate.

Field	Description
	 Note: Use Asterisk (*) for the host part of the FQDN to enforce the domain. For example, *.domain.com will only allow users to request certificates with domain.com. Allowed Special Characters: Asterisk (*), Hyphen (-), Period (.)
Organization	You can provide the organization's name. The discovered certificate's Subject Organization will be compared against the organization provided in the policy to identify if they are complaints. The organization is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Organization Unit	You can provide an organization unit. The discovered certificate's Subject Organization Unit will be compared against the organization unit provided in the policy to identify if they are Complaint. Organization Unit is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Locality	You can provide a locality. The discovered certificate's Locality will be compared against locality provided in the policy to identify if they are complaints. The locality is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
State	You can provide state. The discovered certificate's State will be compared against the state provided in the policy to identify if they are complaints. The state is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Country code	You can provide a country code. The discovered certificate's Country code will be compared against the country code provided in the policy to identify if they are complaints. Country code is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Email	You can provide an organization unit mail address.

Field	Description
	The discovered certificate's mail address will be compared against the email address provided in the policy to identify if they are complaints. Mail address is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Subject Alternative Name	You can provide the subject alternative name (SAN). It helps enforce additional domains for which a certificate can be requested. Subject Alternative Name is enforced while performing certificate request operations such as New, Renew, and Regenerate.  Note: Use Asterisk (*) for the host part of the FQDN to enforce the domain. For example, *.domain.com will only allow users to request certificates with domain domain.com. Allowed Special Characters: Asterisk (*), Hyphen (-), Period (.), At (@) .
*: Mandatory fields	

- Click the **Save CA Details** button to save the configuration. A green tick mark will be displayed in the **Certificate Authority** pane against the **Amazon** option to indicate the details are successfully stored.
- Click the **Create Policy** button to create a new policy.

The policy is created and a confirmation message displays.

Configuring AppViewX CA

To configure the AppViewX CA:

- Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**.
- Select **AppViewX** from the left-side vendor list.
The **AppViewX** home page is displayed.
- Click the **Configure Now** or **+Add** icon from the middle or top-right of the page respectively.



Note: The **Configure Now** option is displayed if you are configuring a CA for the first time.

The **AppViewX** configuration page is displayed.

- Enter/Select the following details in the **General Information** section:

General Information - Field and Description Table

Name	Description
*CA Account name	A unique name to identify the CA setting. Note: No special characters other than '.', '-', '_' are allowed. Names should not start with special characters.
*Purpose/Usage	Certificate Type for which CLM actions will be enabled. Example: Server, Client
CRL Required	Enable this field if the CA communication needs to happen via Proxy. The proxy details configured in general settings will be used for communication.
Data Center (AppViewX's CA agent)	Select the data center through which the CA communication needs to happen.
*: Mandatory fields	

5. Update the following details in the **CSR Parameters** section as described in the table:

CSR Parameters - Field and Description Table

Name	Description
Common Name	The common name of the root certificate.  Note: - Use Asterisk () for the host part of the FQDN to enforce the domain. For example, *.domain.com will only allow users to request certificates with domain domain.com. - Allowed Special Characters: Asterisk (*), Hyphen (-), Period (.)
*Issuer Name	Name of the certificate issuer.
Algorithm	Type of the root certificate.

Name	Description
Hash Function	The hash function for the root certificate.
Organization Unit	Name of the Organisation unit.
Key Length	Key length for the root certificate.
Organization	Organization attribute for the root certificate.
Locality	Locality attribute for the root certificate.
State or Province	State attribute for the root certificate.
Country	Country attribute for the root certificate.
Email Address	Email address for the root certificate.
*: Mandatory fields	

6. Update the following details in the **Validity** section as described in the table.

Name	Description
*Start Date	Start date of the certificate issuance.
*End Date	End date of the certificate issuance.
*: Mandatory fields	

7. Click **Save**.

Once the setting is saved, the user will be directed to the root certificate submission holistic view.

8. Users can submit and fetch the root certificate.

9. On the CA setting page, user can see the status of the created setting.

Configuring AppViewX PKIaaS CA

To configure the AppViewX PKIaaS CA:

1. Go to **menu > KUBE+ > CLUSTER PKI > Certificate Authority**.
2. Select the **AppViewX PKIaaS** in the left side vendor list.
3. Click **Configure Now**.
4. Update the following details in the **General Information** section as described in the table.

General Information - Field and Description Table

Name	Description
*Data Center	Select the data center through which the CA communication needs to happen.
*: Mandatory fields	

5. Update the following details in the **CA Configuration** section as described in the table.

CA Configuration Section - Field and Description Table

Options	Description
*Upload JSON	Option to upload the certificate file.
*Project Id	ID of the project.
*: Mandatory fields	

6. Click **Save**.
7. Select **Fetch Procedures**.



Note: The procedures available in the AppViewX PKIaaS CA account will be fetched and listed for the specific user.

8. To map the fetched procedures, click on one or many and click the **Actions** dropdown:

- a. **CASE 1** - If the user selects Server only in Purpose and Usage, then the fetched procedure by default will be of server/client both. The Action dropdown will only have - **Map as Server.** and **MAP as Default**
 - b. **CASE 2** - If the user selects Client only in Purpose and Usage, then the fetched procedure by default will be of server/client both. The Action dropdown will only have - **Map as Client.** and **MAP as Default**
 - c. **CASE 3** - If the user selects Server and Client both in Purpose and Usage, then the fetched procedure by default will be of server/client both. The Action dropdown will have both the actions **Map as Client , Map as Server,** and **MAP as Default**
9. Click **Save**.

Configuring Policy for DigiCert CA

To configure a DigiCert CA policy:

1. Go to **menu > KUBE+ > Groups & Policies > CA Policy**.

On the **CA Policy** page, the configured policies are displayed, if any.



Note: KUBE+ is packaged with default policies they are Default and Certificate-Gateway.

2. Click **+ Create** on the top-right of the page.
3. Refer [Configuring Policy Details](#) section, to configure the following:
 - **Policy Details**
 - **Group Selection**
 - **Compliance Check**
4. On the **CA Policy: Create** page, click digicert in the **Certificate Authority** pane on the left side of the page.

CA Details - Field and Description Table

Field	Description
*CA Account	The GlobalSign CA accounts configured in CA settings screen are listed. Select a CA account from the list to create the policy.
*Division	Select the division from the dropdown list.
*Certificate Type	The Certificate Types corresponding to the selected CA account are listed. Select one (or) more Certificate Type from the list to create the policy.

Field	Description
*Validity	Enter the validity period for the certificate. The available options are: Days - You can enter more than one validity period in days, to choose one in certificate enrolment. Month - You can enter more than one validity period in Months, to choose one in certificate enrolment. Year - You can enter more than one validity period in Year, to choose one in certificate enrolment.
*: Mandatory fields	

5. In the **Vendor Specific Details** section, select/enter the details as listed in the table.

Vendor Specific Details

Field	Description
*Server Type	Select the server type from the dropdown list.
*: Mandatory fields	

6. Click the **Add** button.

The CA details are saved to the table and the confirmation message displays.

7. You can use the **Edit** option in the table to modify the configuration and the **Remove** option to delete the configuration.

8. In the **CA details** section, select **Bit Length -Key Type**, **ECDSA curve**, and **Hash Function**.

9. You can fill the **Certificate parameters** section based on your organization's policies and standards.

Certificate Parameters - Field and Description Table

Name	Description
Common Name	You can provide the common name. For example, *.domain.com It helps enforce domains for which a certificate can be requested. Common Name is enforced while performing any certificate request operations such as New, Renew, and Regenerate.

Name	Description
	 Note: Use Asterisk (*) for the host part of the FQDN to enforce the domain. For example, *.domain.com will only allow users to request certificates with domain.com. Allowed Special Characters: Asterisk (*), Hyphen (-), Period (.)
Organization	You can provide the organization's name. The discovered certificate's SubjectOrganization will be compared against the organization provided in the policy to identify if they are complaints. The organization is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Organization Unit	You can provide an organization unit. The discovered certificate's Subject Organization Unit will be compared against the organization unit provided in the policy to identify if they are Complaint. Organization Unit is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Locality	You can provide a locality. The discovered certificate's Locality will be compared against the locality provided in the policy to identify if they are complaints. The locality is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
State	You can provide state. The discovered certificate's State will be compared against the state provided in the policy to identify if they are complaints. The state is enforced while performing any certificate request operations such as New, Renew, and Regenerate.

Name	Description
Country code	You can provide a country code. The discovered certificate's Country code will be compared against the country code provided in the policy to identify if they are complaints. Country code is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Email	You can provide an organization unit mail address. The discovered certificate's mail address will be compared against the email address provided in the policy to identify if they are complaints. Mail address is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Subject Alternative Name	You can provide the subject alternative name (SAN) It helps enforce additional domains for which a certificate can be requested. Subject Alternative Name is enforced while performing certificate request operations such as New, Renew, and Regenerate.  Note: Use Asterisk (*) for the host part of the FQDN to enforce the domain. For example, *.domain.com will only allow users to request certificates with domain domain.com. Allowed Special Characters: Asterisk (*), Hyphen (-), Period (.), At (@)
*: Mandatory fields	

10. Click the **Save CA Details** button to save the configuration. A green tick mark will be displayed in the **Certificate Authority** pane against the **DigiCert** option to indicate the details are successfully stored.
11. Click the **Create Policy** button to create a new policy.
12. The policy is created and a confirmation message displays.

Configuring Policy for EJBCA CA

To configure an EJBCA CA policy:

1. Go to **menu > KUBE+ > Groups & Policies > CA Policy**.

On the **CA Policy** page, the configured policies are displayed, if any.



Note: KUBE+ is packaged with default policies they are Default and Certificate-Gateway.

2. Click **+ Create** on the top-right of the page.
3. Refer [Configuring Policy Details](#) section to configure the following,
 - **Policy Details**
 - **Group Selection**
 - **Compliance Check**
4. On the **CA Policy: Create** page, click **EJBCA** in the **Certificate Authority** pane on the left side of the page.

Field	Description
*CA Accounts	The EJBCA accounts configured in the CA settings screen are listed. Select a CA account from the list to create the policy.
*: Mandatory fields	

5. In the **Vendor Specific Details** section, select/enter the details as listed in the table:

Vendor Specific Details Section - Field and Description Table

Field	Description
End entity user name	Enter the name of the end entity user.
*End entity Profile name	Enter the name of the end entity profile.
*Issuer Common Name	Enter the common user name.
*Certificate Profile Name	Enter a certificate profile name.
*: Mandatory fields	

6. Click the **Add** button.
The CA details are saved to the table and the confirmation message displays.
7. You can use the **Remove** option to delete the configuration.
8. In the **CA details** section, select **Bit Length -Key Type, ECDSA curve, and Hash Function**.

Bit Length, ECDSA curve, and Hash Function - Field and Description Table

Name	Description	Purpose
*Bit Length - Key Type	All the Key Types are listed with corresponding Bit Length . You can select one (or) more than one Bit Length - Key Type(s) from the drop-down.	The discovered certificate's Key Type and Bit length will be compared against the selected Bit Length - Key Type(s) to identify if they are complaint with the policy. Selected Bit Length - Key Type(s) is enforced while performing any certificate request operations such as New, Renew, Regenerate.
*ECDSA curve	When Key Type is selected as EC, ECDSA curve corresponding to selected Key Type is listed. You can select one (or) more than one ECDSA curve from the drop-down. for a certificate.	The discovered certificate's Key elliptic curves will be compared against the selected ECDSA curve(s) to identify if they are complaint with the policy. Selected ECDSA curve(s) is enforced while performing certificate request operations such as New, Renew, and Regenerate. We recommend using P256/ P384/ P521 ECDSA curve while enrolling.
*Hash Function	Supported Hash Function(s) are listed. You can select one (or) more than one Hash Function(s) from the drop-down.	The discovered certificate's Key Hash Algorithm will be compared against the selected Hash Function(s) to identify if they are complaint with the policy. Selected Hash Function(s) is enforced while performing any certificate request operations such as New, Renew, Regenerate.
*: Mandatory fields		

9. You can fill the **Certificate parameters** section based on your organization's policies and standards.

Certificate parameters - Field and Description Table

Name	Description
Common Name	You can provide the common name. For example, *.domain.com. It helps enforce domains for which a certificate can be requested. Common Name is enforced while performing any certificate request operations such as New, Renew, and Regenerate.  Note: Use Asterisk (*) for the host part of the FQDN to enforce the domain. For example, *.domain.com will only allow users to request certificates with domain.com. Allowed Special Characters: Asterisk (*), Hyphen (-), Period (.).
Organization	You can provide the organization's name. The discovered certificate's Subject Organization will be compared against the organization provided in the policy to identify if they are complaints. The organization is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Organization Unit	You can provide an organization unit. The discovered certificate's Subject Organization Unit will be compared against the organization unit provided in the policy to identify if they are Complaint. Organization Unit is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Locality	You can provide a locality.

Name	Description
	The discovered certificate's Locality will be compared against the locality provided in the policy to identify if they are complaints. The locality is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
State	You can provide state. The discovered certificate's State will be compared against the state provided in the policy to identify if they are complaints. The state is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Country code	You can provide a country code. The discovered certificate's Country code will be compared against the country code provided in the policy to identify if they are complaints. Country code is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Email	You can provide an organization unit mail address. The discovered certificate's mail address will be compared against the email address provided in the policy to identify if they are complaints. Mail address is enforced while performing any certificate request operations such as New, Renew, Regenerate.
Subject Alternative Name	You can provide the subject alternative name (SAN). It helps enforce additional domains for which a certificate can be requested. Subject Alternative Name is enforced while performing certificate request operations such as New, Renew, and Regenerate.

Name	Description
	 Note: Use Asterisk (*) for the host part of the FQDN to enforce the domain. For example, *.domain.com will only allow users to request certificates with domain domain.com. Allowed Special Characters: Asterisk (*), Hyphen (-), Period (.), At (@).
*: Mandatory fields	

- Click the **Save CA Details** button to save the configuration. A green tick mark displays in the **Certificate Authority** pane against the **EJBCA** option to indicate the details are successfully stored.
- Click **Create Policy** button to create a new policy.
- The policy is created and a confirmation message displays.

Configuring Policy for Entrust CA

To configure an Entrust CA policy:

- Go to **menu > KUBE+ > Groups & Policies > CA Policy**.

On the **CA Policy** page, the configured policies are displayed, if any.



Note: KUBE+ is packaged with default policies they are Default and Certificate-Gateway.

- Click **+ Create** on the top-right of the page.
- Refer [Configuring Policy Details](#) section to configure the following,
 - Policy Details**
 - Group Selection**
 - Compliance Check**
- On the **CA Policy: Create** page, click Entrust in the **Certificate Authority** pane on the left side of the page.

CA Details - Field and Description Table

Field	Description
* CA Account	The Entrust CA accounts configured in the CA settings screen are listed. Select a CA account from the list to create the policy.

Field	Description
*Certificate Type	The Certificate Types corresponding to the selected CA account are listed. Select one (or) more Certificate Type from the list to create the policy.
*Validity	Enter the validity period for the certificate. The available options are: Days - You can enter more than one validity period in days, to choose one in certificate enrolment. Month - You can enter more than one validity period in Months, to choose one in certificate enrolment. Year - You can enter more than one validity period in Year, to choose one in certificate enrolment.
*: Mandatory fields	

5. In the **Vendor Specific Details section**, select/enter the details as listed in the table:

Field	Description
Additional Emails	Enter the valid email address in the field.

6. Click the **Add** button.

The CA details are saved to the table and the confirmation message displays.

7. You can use the **Edit** option in the table to modify the configuration and the **Remove** option to delete the configuration.

8. In the **CA details** section, select **Bit Length -Key Type**, **ECDSA curve**, and **Hash Function**.

Bit Length, ECDSA curve, and Hash Function - Field and Descriptions Table

Name	Description	Purpose
*Bit Length - Key Type	All the Key Types are listed with corresponding Bit Length . You can select one (or) more than one Bit Length - Key Type(s) from the drop-down.	The discovered certificate's Key Type and Bit length will be compared against the selected Bit Length - Key Type(s) to identify if they are complaint with the policy. Selected Bit Length - Key Type(s) is enforced while performing any certificate request operations such as New, Renew, Regenerate.
*ECDSA curve	When Key Type is selected as EC, ECDSA curve	The discovered certificate's Key elliptic curves will be compared against the

Name	Description	Purpose
	corresponding to selected Key Type is listed. You can select one (or) more than one ECDSA curve from the drop-down. for a certificate.	selected ECDSA curve(s) to identify if they are complaint with the policy. Selected ECDSA curve(s) is enforced while performing certificate request operations such as New, Renew, and Regenerate. We recommend to use P256/ P384/ P521 ECDSA curve while enrolling.
*Hash Function	Supported Hash Function(s) are listed. You can select one (or) more than one Hash Function(s) from the drop-down.	The discovered certificate's Key Hash Algorithm will be compared against the selected Hash Function(s) to identify if they are complaint with the policy. Selected Hash Function is enforced while performing any certificate request operations such as New, Renew, Regenerate.
*: Mandatory fields		

9. You can fill the **Certificate parameters** section based on your organization's policies and standards.

Certificate Parameters - Field and Description Table

Name	Description
Common Name	You can provide the common name. For example, *.domain.com. It helps enforce domains for which a certificate can be requested. Common Name is enforced while performing any certificate request operations such as New, Renew, and Regenerate.

Name	Description
	 Note: Use Asterisk (*) for the host part of the FQDN to enforce the domain. For example, *.domain.com will only allow users to request certificates with domain.com. Allowed Special Characters: Asterisk (*), Hyphen (-), Period (.).
Organization	You can provide the organization's name. The discovered certificate's Subject Organization will be compared against the organization provided in the policy to identify if they are complaints. The organization is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Organization Unit	You can provide an organization unit. The discovered certificate's Subject Organization Unit will be compared against the organization unit provided in the policy to identify if they are Complaint. Organization Unit is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Locality	You can provide a locality. The discovered certificate's Locality will be compared against the locality provided in the policy to identify if they are complaints. The locality is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
State	You can provide state. The discovered certificate's State will be compared against the state provided in the policy to identify if they are complaints.

Name	Description
	The state is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Country code	You can provide a country code. The discovered certificate's Country code will be compared against the country code provided in the policy to identify if they are complaints. Country code is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Email	You can provide an organization unit mail address. The discovered certificate's mail address will be compared against the email address provided in the policy to identify if they are complaints. Mail address is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Subject Alternative Name	You can provide the subject alternative name (SAN). It helps enforce additional domains for which a certificate can be requested. Subject Alternative Name is enforced while performing certificate request operations such as New, Renew, and Regenerate.  Note: Use Asterisk (*) for the host part of the FQDN to enforce the domain. For example, *.domain.com will only allow users to request certificates with domain domain.com. Allowed Special Characters: Asterisk (*), Hyphen (-), Period (.), At (@).
*: Mandatory fields	

- Click the **Save CA Details** button to save the configuration. A green tick mark will be displayed in the **Certificate Authority** pane against **Entrust** option to indicate the details are successfully stored.

11. Click the **Create Policy** button to create a new policy.
12. The policy is created and a confirmation message displays.

Configuring Policy for Entrust MPKI CA

To configure an Entrust MPKI CA policy:

1. Go to **menu > KUBE+ > Groups & Policies > CA Policy**.

On the **CA Policy** page, the configured policies are displayed, if any.



Note: KUBE+ is packaged with default policies they are Default and Certificate-Gateway.

2. Click **+ Create** on the top-right of the page.
3. Refer [Configuring Policy Details](#) section to configure the following,
 - **Policy Details**
 - **Group Selection**
 - **Compliance Check**
4. On the **CA Policy: Create** page, click Entrust MPKI in the **Certificate Authority** pane on the left side of the page.

The following table provides the field description in the **CA Details** section:

CA Details - Field and Description Table

Field	Description
*CA Accounts	The Entrust CA accounts configured in the CA settings screen are listed. • Select a CA account from the list to create the policy. • The selected CA account will be listed in the CA Accounts table.
*Bit Length - Key Type	All the Key Types are listed with corresponding Bit Length. You can select one (or) more than one Bit Length - Key Type(s) from the drop-down. The discovered certificate's Key Type and Bit length will be compared against the selected Bit Length - Key Type(s) to identify if they are complaint with the policy. Selected Bit Length - Key Type(s) is enforced while performing any certificate request operations such as New, Renew, Regenerate.

Field	Description
*Hash Function	Supported Hash Function(s) are listed. You can select one (or) more than one Hash Function(s) from the drop-down. The discovered certificate's Key Hash Algorithm will be compared against the selected Hash Function(s) to identify if they are complaint with the policy. Selected Hash Function is enforced while performing any certificate request operations such as New, Renew, Regenerate.
*: Mandatory fields	

5. You can fill the **Certificate parameters** section based on your organization's policies and standards.

The following table provides the field description under the **Certificate parameters** section:

Certificate Parameters - Field and Description Table

Name	Description
Common Name	You can provide the common name. For example, *.domain.com. It helps enforce domains for which a certificate can be requested. Common Name is enforced while performing any certificate request operations such as New, Renew, and Regenerate.  Note: Use Asterisk (*) for the host part of the FQDN to enforce the domain. For example, *.domain.com will only allow users to request certificates with domain.com. Allowed Special Characters: Asterisk (*), Hyphen (-), Period (.) .
Organization	You can provide the organization's name. The discovered certificate's Subject Organization will be compared against the organization provided in the policy to identify if they are complaints. The organization is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Organization Unit	You can provide an organization unit.

Name	Description
	The discovered certificate's Subject Organization Unit will be compared against the organization unit provided in the policy to identify if they are Complaint. Organization Unit is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Locality	You can provide a locality. The discovered certificate's Locality will be compared against the locality provided in the policy to identify if they are complaints. The locality is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
State	You can provide state. The discovered certificate's State will be compared against the state provided in the policy to identify if they are complaints. The state is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Country code	You can provide a country code. The discovered certificate's Country code will be compared against the country code provided in the policy to identify if they are complaints. Country code is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Email	You can provide an organization unit mail address. The discovered certificate's mail address will be compared against the email address provided in the policy to identify if they are complaints. Mail address is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Subject Alternative Name	You can provide the subject alternative name (SAN)

Name	Description
	It helps enforce additional domains for which a certificate can be requested. Subject Alternative Name is enforced while performing certificate request operations such as New, Renew, and Regenerate.  Note: Use Asterisk (*) for the host part of the FQDN to enforce the domain. For example, *.domain.com will only allow users to request certificates with domain domain.com. Allowed Special Characters: Asterisk (*), Hyphen (-), Period (.), At (@).
*: Mandatory fields	

6. Click the **Save CA Details** button to save the configuration. A green tick mark will be displayed in the **Certificate Authority** pane against **Entrust MPKI** option to indicate the details are successfully stored.



Note: The Pop-up message is displayed as **Entrust MPKI - CA details added.**

7. Refer **Configuring Policy Details** section to configure the following:
- **Group Selection** section
 - **Compliance Check** section
8. Click the **Create Policy** button to create a new policy.
9. The policy is created and a confirmation message is displayed.

Configuring Policy for GlobalSign Atlas CA

Before You Begin: The prerequisites for configuring the policy are as follows:

- Certificate Group(s) must be available to map the policy to them.
- CA accounts (settings) must be available to which the policy is going to be created.
- AppViewX permission required (Accounts > Roles - Click here to check Accounts management).

To configure policy for GlobalSign Atlas CA:

1. Go to **menu > KUBE+ > Groups & Policies > CA Policy**.
On the **CA Policy** page, the configured policies are displayed, if any.



Note: KUBE+ is packaged with default policies they are Default and Certificate-Gateway.

2. Click **+ Create** button to configure GlobalSign Atlas custom policy.
3. Refer [Configuring Policy Details](#) section to configure the following:
 - Policy Details section
 - Group Selection section
 - Compliance Check section
4. On the **CA Policy: Create** page, click **GlobalSign Atlas** in the **Certificate Authority** pane on the left side of the screen.

The updated fields for the CA are displayed on the right side of page.

CA Details - Field and Description Table

Field Name	Description
*CA Accounts	The GlobalSign Atlas CA accounts configured in the CA settings screen are listed here. Select a CA account from the list to create the policy.
*Validity	Enter the validity period for the certificate. The available options are: • Days - You can enter more than one validity period in days, to choose one in certificate enrolment. • Month - You can enter more than one validity period in Months, to choose one in certificate enrolment. • Year - You can enter more than one validity period in Year, to choose one in certificate enrolment.
*Bit Length - Key Type	All the Key Types are listed with corresponding Bit Length. You can select one (or) more than one Bit Length - Key Type(s) from the drop-down.

Field Name	Description
	The discovered certificate's Key Type and Bit length will be compared against the selected Bit Length - Key Type(s) to identify if they are compliant with the policy. Selected Bit Length - Key Type(s) is enforced while performing any certificate request operations such as New, Renew, Regenerate.
*Hash Function	Supported Hash Function(s) are listed here. You can select one (or) more Hash Function(s) from the drop-down. The discovered certificate's Key Hash Algorithm will be compared against the selected Hash Function(s) to identify if they are compliant with the policy. Selected Hash Function(s) is enforced while performing any certificate request operations such as New, Renew, Regenerate.
*: Mandatory fields	

5. Enter the desired values above and click **Add**.

The CA details are saved to the table and the confirmation message is displayed.

6. You can use the **Edit** (pencil) option in the table to modify the configuration and the **Remove** (bin) option to delete the configuration.

7. Enter values in the **Certificate parameters** section based on your organization's policies and standards.

Certificate Parameters - Field and Description Table

Field Name	Description
*Host Name	Enter the hostname for the certificate. The hostname should not start and end with a dot/full stop (.)

Field Name	Description
*Allowed Domain Names	Enter only the white-listed domain names. Press enter after adding the domain name. multiple domain names can be added.
Common Name	You can provide the common name. For example, *.domain.com It helps enforce domains for which a certificate can be requested. Common Name is enforced while performing any certificate request operations such as New, Renew, Regenerate. Use Asterisk (*) for the host part of the FQDN to enforce the domain. For example, *.domain.com will only allow users to request certificates with domain.com. Allowed Special Characters: Asterisk (*), Hyphen (-), Period (.)
*: Mandatory fields	

8. Click the **Save CA Details** button.
9. Select groups from the **Group selection** section and indicate for **Compliance check** using the toggle button in the respective section.
10. Click the **Create Policy** button to create a new policy.

The policy is created and a confirmation message is displayed.

Configuring Policy for GlobalSign CA

To configure a GlobalSign CA policy:

1. Go to **menu > KUBE+ > Groups & Policies > CA Policy**.
On the **CA Policy** page, the configured policies are displayed, if any.



Note: KUBE+ is packaged with default policies they are Default and Certificate-Gateway.

2. Click **+ Create** on the top-right of the page.
3. Refer [Configuring Policy Details](#) section to configure the following,
 - **Policy Details**
 - **Group Selection**
 - **Compliance Check**
4. On the **CA Policy: Create** page, click **GlobalSign** in the **Certificate Authority** pane on the left side of the page.
5. In the **Vendor Specific Details** section, select/enter the details as listed in the table.

Vendor Specific Details - Fields and Description Table

Field	Description
*Incorporating Agency Reg. No	Enter the agency registration number.
*Designation	Enter the designation.
*Business Category	Select the business category from the dropdown list.
<i>*: Mandatory fields</i>	

6. Click the **Add** button.

The CA details are saved to the table and the confirmation message displays.

7. You can use the **Edit** option in the table to modify the configuration and **Remove** option to delete the configuration.
8. In the **CA details** section, select **Bit Length -Key Type**, **ECDSA curve**, and **Hash Function**.

The following table provides the field description in the **CA Details** section:

CA Details - Field and Description Table

Name	Description
*Bit Length - Key Type	All the Key Types are listed with corresponding Bit Length . You can select one (or) more than one Bit Length - Key Type(s) from the drop-down.

Name	Description
	The discovered certificate's Key Type and Bit length will be compared against the selected Bit Length - Key Type(s) to identify if they are complaint with the policy. Selected Bit Length - Key Type(s) is enforced while performing any certificate request operations such as New, Renew, Regenerate.
*ECDSA curve	When Key Type is selected as EC, ECDSA curve corresponding to selected Key Type is listed. You can select one (or) more than one ECDSA curve from the drop-down. for a certificate. The discovered certificate's Key elliptic curves will be compared against the selected ECDSA curve(s) to identify if they are complaint with the policy. Selected ECDSA curve(s) is enforced while performing certificate request operations such as New, Renew, and Regenerate. We recommend using P256/ P384/ P521 ECDSA curve while enrolling.
*Hash Function	Supported Hash Function(s) are listed. You can select one (or) more than one Hash Function(s) from the drop-down. The discovered certificate's Key Hash Algorithm will be compared against the selected Hash Function(s) to identify if they are complaint with the policy. Selected Hash Function(s) is enforced while performing any certificate request operations such as New, Renew, Regenerate.
<i>*: Mandatory fields</i>	

9. You can fill the **Certificate parameters** section based on your organization's policies and standards.

Certificate Parameters - Field and Description Table

Name	Description
Common Name	You can provide the common name. For example, *.domain.com. It helps enforce domains for which a certificate can be requested. Common Name is enforced while performing any certificate request operations such as New, Renew, and Regenerate.  Note: Use Asterisk (*) for the host part of the FQDN to enforce the domain. For example, *.domain.com will only allow users to request certificates with domain.com. Allowed Special Characters: Asterisk (*), Hyphen (-), Period (.)
Organization	You can provide the organization's name. The discovered certificate's Subject Organization will be compared against the organization provided in the policy to identify if they are complaints. The organization is enforced while performing any certificate request operations such as New, Renew, Regenerate.
Organization Unit	You can provide an organization unit. The discovered certificate's Subject Organization Unit will be compared against the organization unit provided in the policy to identify if they are Complaint. Organization Unit is enforced while performing any certificate request operations such as New, Renew, Regenerate.
Locality	You can provide a locality. The discovered certificate's Locality will be compared against the locality provided in the policy to identify if they are complaints. The locality is enforced while performing any certificate request operations such as New, Renew, Regenerate.
State	You can provide state.

Name	Description
	The discovered certificate's State will be compared against the state provided in the policy to identify if they are complaints. The state is enforced while performing any certificate request operations such as New, Renew, Regenerate.
Country code	You can provide a country code. The discovered certificate's Country code will be compared against the country code provided in the policy to identify if they are complaints. Country code is enforced while performing any certificate request operations such as New, Renew, Regenerate.
Email	You can provide an organization unit mail address. The discovered certificate's mail address will be compared against the mail address provided in the policy to identify if they are Complaint. Mail address is enforced while performing any certificate request operations such as New, Renew, Regenerate.
Subject Alternative Name	You can provide the subject alternative name (SAN) It helps enforce additional domains for which a certificate can be requested. Subject Alternative Name is enforced while performing certificate request operations such as New, Renew, and Regenerate.  Note: Use Asterisk (*) for the host part of the FQDN to enforce the domain. For example, *.domain.com will only allow users to request certificates with domain domain.com. Allowed Special Characters: Asterisk (*), Hyphen (-), Period (.), At (@).
*: Mandatory fields	

- Click the **Save CA Details** button to save the configuration. A green tick mark will be displayed in the **Certificate Authority** pane against the GlobalSign option to indicate the details are successfully stored.

11. Click the **Create Policy** button to create a new policy.
12. The policy is created and a confirmation message displays.

Configuring Policy for GlobalSign MSSL CA

To configure a GlobalSign MSSL CA policy:

1. Go to **menu > KUBE+ > Groups & Policies > CA Policy**.

On the **CA Policy** page, the configured policies are displayed, if any.



Note: KUBE+ is packaged with default policies they are Default and Certificate-Gateway.

2. Click **+ Create** button to configure GlobalSign MSSL based policy.
3. Refer [Configuring Policy Details](#) section to configure the following,
 - **Policy Details** section
 - **Group Selection** section
 - **Compliance Check** section
4. On the **CA Policy: Create** page, click **GlobalSign MSSL** in the **Certificate Authority** pane on the left side of the screen.

The following table provides the field description under **CA Details** section:

CA Details - Field and Description Table

Name	Description
* CA Accounts	The GlobalSign MSSL CA accounts configured on the CA settings screen are listed. Select a CA account from the list to create the policy.
* Product Type	All Managed SSL Product Types require that the Organization's information and at least one Domain be registered in the Managed SSL account prior to ordering.
* Signature Algorithm	Select the Signature Algorithm from the drop-down list.
* MSSL Profile Allowed Domain Name	Select the MSSL Profile Allowed Domain Name from the drop-down list.

Name	Description
* Validity	Provide the value and press Enter . Enforce Certificate Validity period for selected Certificate Type. The certificate validity of GlobalSign MSSL CA is represented in Day(s) and Year(s). One (or) more than one period can be added.
*: <i>Mandatory fields</i>	

5. Select **CA accounts, Product Type, Signature Algorithm, MSSL Profile Allowed Domain Name, and Validity** under **CA details** section and provide **Validity** period.
6. Click **Add** button. The CA details are saved to the table and the confirmation message is displayed.
7. You can use **Edit** option in the table to modify the configuration and the **Remove** option to delete the configuration.

The following table provides the field description under the **CA Details** section:

Bit Length and ECDSA curve- Field and Description Table

Name	Description
* Bit Length - Key Type	All the Key Types are listed with corresponding Bit Length. You can select one (or) more than one Bit Length - Key Type(s) from the drop-down. The discovered certificate's Key Type and Bit length will be compared against the selected Bit Length - Key Type(s) to identify if they are compliant with the policy. Selected Bit Length - Key Type(s) is enforced while performing any certificate request operations such as New, Renew, Regenerate.
* ECDSA Curve	The ECDSA curve's values get auto-populated once the details are configured/selected and the Add button is clicked. A discovered certificate's key elliptic curves will be compared against the information to identify if there is a complaint. Additionally, the below details will also be enforced while performing certificate request operations such as New, Renew, and Regenerate. We recommend using the P256/ P384/ P521 ECDSA curve while enrolling for a certificate.
*: <i>Mandatory fields</i>	

8. Select **Bit Length -Key Type, ECDSA curve, Hash Function** under **CA details** section.

The following table provides the field description under the **Certificate parameters** section:

Certificate Parameters - Field and Description Table

Name	Description
Host Name	You can provide the hostname. The hostname should not start and end with a dot/fullstop(.).
Common Name	You can provide the common name. For example, *.domain.com It helps enforce domains for which a certificate can be requested. Common Name is enforced while performing any certificate request operations such as New, Renew, Regenerate. Use Asterisk (*) for the host part of the FQDN to enforce the domain. For example, *.domain.com will only allow users to request certificates with domain.com. Allowed Special Characters: Asterisk (*), Hyphen (-), Period (.).
Organization	You can provide organization name. The discovered certificate's SubjectOrganization will be compared against the organization provided in the policy to identify if there are complaints. Organization is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Organization Unit	You can provide an organizational unit. The discovered certificate's Subject Organization Unit will be compared against the organization unit provided in the policy to identify if there is a Complaint. Organization Unit is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Locality	You can provide a locality. The discovered certificate's Locality will be compared against the locality provided in the policy to identify if they are Complaint. Locality is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
State	You can provide state.

Name	Description
	The discovered certificate's State will be compared against the state provided in the policy to identify if there is a complaint. State is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Country code	You can provide a country code. The discovered certificate's Country code will be compared against the country code provided in the policy to identify if there are complaints. Country code is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Email	You can provide the organization unit mail address. The discovered certificate's mail address will be compared against the mail address provided in the policy to identify if there is a complaint. Mail address is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Subject Alternative Name	You can provide the subject's alternative name (SAN) It helps enforce additional domains for which a certificate can be requested. Subject Alternative Name is enforced while performing certificate request operations such as New, Renew, and Regenerate. Use Asterisk (*) for the host part of the FQDN to enforce the domain. For example, *.domain.com will only allow users to request certificates with domain domain.com. Allowed Special Characters: Asterisk (*), Hyphen (-), Period (.), At (@).
*: Mandatory fields	

9. You can fill in the **Certificate parameters** section based on your organization's policies and standards.
10. Click the **Save CA Details** button to save the configuration. A green tick mark will be displayed in the **Certificate Authority** pane against the **GlobalSign MSSLOption** to indicate the details are successfully stored.

11. Click **Create Policy** button to create a new policy.
12. The policy is created and a confirmation message is displayed.

Configuring Policy for GoDaddy CA

To configure a GoDaddy CA policy:

1. Go to **menu > KUBE+ > Groups & Policies > CA Policy**.

On the **CA Policy** page, the configured policies are displayed, if any.



Note: KUBE+ is packaged with default policies they are Default and Certificate-Gateway.

2. Click **+ Create** on the top-right of the page.

The **CA Policy: Create** page is displayed.

3. Refer [Configuring Policy Details](#) section to configure the following,
 - **Policy Details**
 - **Group Selection**
 - **Compliance Check**
4. On the **CA Policy: Create** page, click GoDaddy in the **Certificate Authority** pane on the left side of the page.

CA Details - Field and Description Table

Field	Description
*CA Account	The GoDaddy CA accounts configured in CA settings screen are listed. Select a CA account from the list to create the policy.
*Certificate Type	The Certificate Types corresponding to the selected CA account are listed. Select one (or) more Certificate Type from the list to create the policy.
*Validity	Enter the validity period for the certificate. The available options are: Days - You can enter more than one validity period in days, to choose one in certificate enrolment.

Field	Description
	Month - You can enter more than one validity period in Months, to choose one in certificate enrolment. Year - You can enter more than one validity period in Year, to choose one in certificate enrolment.
*: Mandatory fields	

5. In the **Vendor Specific Details section**, select/enter the details as listed in the table:

Vendor Specific Details section - Field and Description Table

Field	Description
*Slot Size	Select the size of the slot from the dropdown list.
*: Mandatory fields	

6. Click the **Add** button.

The CA details are saved to the table and the confirmation message displays.

7. You can use **Edit** option in the table to modify the configuration and **Remove** option to delete the configuration.

8. Select **Bit Length -Key Type, ECDSA curve, Hash Function** in the **CA details** section.

CA Details - Field and Description Table

Name	Description
*Bit Length - Key Type	All the Key Types are listed with corresponding Bit Length. You can select one (or) more than one Bit Length - Key Type(s) from the drop-down. The discovered certificate's Key Type and Bit length will be compared against the selected Bit Length - Key Type(s) to identify if they are complaint with the policy. Selected Bit Length - Key Type(s) is enforced while performing any certificate request operations such as New, Renew, Regenerate.
*ECDSA curve	When Key Type is selected as EC, ECDSA curve corresponding to selected Key Type is listed. You

Name	Description
	can select one (or) more than one ECDSA curve from the drop-down. for a certificate. The discovered certificate's Key elliptic curves will be compared against the selected ECDSA curve(s) to identify if they are complaint with the policy. Selected ECDSA curve(s) is enforced while performing certificate request operations such as New, Renew, and Regenerate. We recommend using P256/ P384/ P521 ECDSA curve while enrolling.
*Hash Function	SupportedHash Function(s) are listed. You can select one (or) more than one Hash Function(s) from the drop-down. The discovered certificate's Key Hash Algorithm will be compared against the selected Hash Function(s) to identify if they are complaint with the policy. Selected Hash Function(s) is enforced while performing any certificate request operations such as New, Renew, Regenerate.
*: Mandatory fields	

9. You can fill **Certificate parameters** section based on your organization's policies and standards.

The following table provides the field description in the **Certificate parameters** section:

Certificate Parameters - Field and Description Table

Name	Description
Common Name	You can provide the common name. For example, *.domain.com It helps enforce domains for which a certificate can be requested. Common Name is enforced while performing any certificate request operations such as New, Renew, and Regenerate.

Name	Description
	 Note: Use Asterisk (*) for the host part of the FQDN to enforce the domain. For example, *.domain.com will only allow users to request certificates with domain.com. Allowed Special Characters: Asterisk (*), Hyphen (-), Period (.).
Organization	You can provide the organization's name. The discovered certificate's Subject Organization will be compared against the organization provided in the policy to identify if they are complaints. The organization is enforced while performing any certificate request operations such as New, Renew, Regenerate.
Organization Unit	You can provide an organization unit. The discovered certificate's Subject Organization Unit will be compared against the organization unit provided in the policy to identify if they are Complaint. Organization Unit is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Locality	You can provide a locality. The discovered certificate's Locality will be compared against the locality provided in the policy to identify if they are complaints. The locality is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
State	You can provide state. The discovered certificate's State will be compared against the state provided in the policy to identify if they are complaints. The state is enforced while performing any certificate request operations such as New, Renew, and Regenerate.

Name	Description
Country code	You can provide a country code. The discovered certificate's Country code will be compared against the country code provided in the policy to identify if they are complaints. Country code is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Email	You can provide an organization unit mail address. The discovered certificate's mail address will be compared against the email address provided in the policy to identify if they are complaints. Mail address is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Subject Alternative Name	You can provide the subject alternative name (SAN). It helps enforce additional domains for which a certificate can be requested. Subject Alternative Name is enforced while performing certificate request operations such as New, Renew, and Regenerate.  Note: Use Asterisk (*) for the host part of the FQDN to enforce the domain. For example, *.domain.com will only allow users to request certificates with domain domain.com. Allowed Special Characters: Asterisk (*), Hyphen (-), Period (.), At (@).
*: Mandatory fields	

10. Click the **Save CA Details** button to save the configuration. A green tick mark will be displayed in the **Certificate Authority** pane against the **GoDaddy** option to indicate the details are successfully stored.
11. Click **Create Policy** button to create a new policy.
12. The policy is created and a confirmation message displays.

Configuring Policy for Google CA

To configure a Google CA policy:

1. Go to **menu > KUBE+ > Groups & Policies > CA Policy**.

On the **CA Policy** page, the configured policies are displayed, if any.



Note: KUBE+ is packaged with default policies they are Default and Certificate-Gateway.

2. Click **+ Create** on the top-right of the page.
3. Refer [Configuring Policy Details](#) section to configure the following,
 - **Policy Details**
 - **Group Selection**
 - **Compliance Check**
4. On the **CA Policy: Create** page, click **Google** in the **Certificate Authority** pane on the left side of the page.

CA Details - Field and Description Table

Field	Description
*CA Accounts	The Google CA accounts configured in the CA settings screen are listed. Select a CA account from the list to create the policy.
*Issuer Location	The Issuer Location corresponding to the selected CA account is listed. Select an Issuer Location from the list to create the policy.
*Issuer Name	The Issuer Name corresponding to the selected issuer location is listed. Select an Issuer Name from the list to create the policy.
*Validity	Provide the value and press Enter . Enforce Validity period for selected Issuer Name. The validity for Google CA can be represented in Day(s)/ Month(s)/ Year(s). One (or) more than one Validity period can be added.
*: Mandatory fields	

5. In the CA details section, select the **Bit Length -Key Type(s), ECDSA curve(s), and Hash Function(s)**.

Bit Length, ECDSA curve, and Hash Function - Field and Description Table

Name	Description
*Bit Length - Key Type	All the Key Types are listed with corresponding Bit Length. You can select one (or) more than one Bit Length - Key Type(s) from the drop-down. The discovered certificate's Key Type and Bit length will be compared against the selected Bit Length - Key Type(s) to identify if they are complaint with the policy. Selected Bit Length - Key Type(s) is enforced while performing any certificate request operations such as New, Renew, Regenerate.
*ECDSA curve	When Key Type is selected as EC, ECDSA curve corresponding to selected Key Type is listed. You can select one (or) more than one ECDSA curve from the drop-down. for a certificate. The discovered certificate's Key elliptic curves will be compared against the selected ECDSA curve(s) to identify if they are complaint with the policy. Selected ECDSA curve(s) is enforced while performing certificate request operations such as New, Renew, and Regenerate. We recommend to use P256/ P384/ P521 ECDSA curve while enrolling.
*Hash Function	Supported Hash Function(s) are listed. You can select one (or) more than one Hash Function(s) from the drop-down. The discovered certificate's Key Hash Algorithm will be compared against the selected Hash Function(s) to identify if they are complaint with the policy. Selected Hash Function(s) is enforced while performing any certificate request operations such as New, Renew, Regenerate.

Name	Description
*: Mandatory fields	

6. You can fill the **Certificate parameters** section based on your organization's policies and standards.

For the Policy Enforcement Type = **Strict**

For the Policy Enforcement Type = **Suggestive**

The following table provides the field description in the **Certificate parameters** section:

Certificate Parameters - Field and Description Table

Name	Description
Hostname	This text field is displayed if the Policy Enforcement Type = Strict or Suggestive. Enter the unique name or label for the host. The field is mandatory only when the Policy Enforcement Type = Strict.  Note: The hostname should not start or end with a dot.
Allowed Domain Name	This text field is displayed if the Policy Enforcement Type = Strict or Suggestive. The field is mandatory only when the Policy Enforcement Type = Strict. Enter the valid domain name (two parts separated by a dot, such as example.com) .
Blocked Domain Name	This text field is displayed only if the Policy Enforcement Type = Suggestive. Enter the domain names (two parts separated by a dot, such as example.com) that need to be blocked. .
Common Name	This is a non-editable field. It has comma-separated values of possible domain names which are allowed. It helps enforce domains for which a certificate can be requested. Common Name is enforced while performing any certificate request operations such as New, Renew, and Regenerate.

Name	Description
	 Note: Use Asterisk (*) for the host part of the FQDN to enforce the domain. For example, *.domain.com will only allow users to request certificates with domain.com. Allowed Special Characters: Asterisk (*), Hyphen (-), Period (.).
Organization	You can provide the organization's name. The discovered certificate's Subject Organization will be compared against the organization provided in the policy to identify if they are complaints. The organization is enforced while performing any certificate request operations such as New, Renew, Regenerate.
Organization Unit	You can provide an organization unit. The discovered certificate's Subject Organization Unit will be compared against the organization unit provided in the policy to identify if they are Complaint. Organization Unit is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Locality	You can provide a locality. The discovered certificate's Locality will be compared against the locality provided in the policy to identify if they are complaints. The locality is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
State	You can provide state. The discovered certificate's State will be compared against the state provided in the policy to identify if they are complaints. The state is enforced while performing any certificate request operations such as New, and Renew, Regenerate.
Country code	You can provide a country code. The discovered certificate's Country code will be compared against the country code provided in the policy to identify if they are complaints. Country code is enforced

Name	Description
	while performing any certificate request operations such as New, Renew, and Regenerate.
Email	You can provide an organization unit mail address. The discovered certificate's mail address will be compared against the email address provided in the policy to identify if they are Complaint. Mail address is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Subject Alternative Name	You can provide the subject alternative name (SAN). It helps enforce additional domains for which a certificate can be requested. Subject Alternative Name is enforced while performing certificate request operations such as New, Renew, and Regenerate.  Note: Use Asterisk (*) for the host part of the FQDN to enforce the domain. For example, *.domain.com will only allow users to request certificates with domain domain.com. Allowed Special Characters: Asterisk (*), Hyphen (-), Period (.), At (@).
*: Mandatory fields	

7. You can use the **Edit** option in the table to modify the configuration and **Remove** option to delete the configuration.
8. A green tick mark will be displayed in the **Certificate Authority** pane against the **Google** option to indicate the details are successfully stored.
9. Click the **Create Policy** button to create a new policy.
10. The policy is created and a confirmation message displays.

Configuring Policy for HashiCorp Vault CA

Before You Begin

- Certificate Group(s) must be available to map the Policy to them.
- CA accounts (settings) must be available to which the policy is going to be created.
- Key Algorithm, Encryption Type must be available under the CA accounts.
- AppViewX permission required (Accounts > Roles - Click here to check Accounts management).

To configure a HashiCorp Vault CA policy:

1. Go to **menu > KUBE+ > Groups & Policies > CA Policy**.

On the **CA Policy** page, the configured policies are displayed, if any.



Note: KUBE+ is packaged with default policies they are Default and Certificate-Gateway.

2. Create a custom policy by clicking the **Create** button on the upper right corner of the CA Policy page.
3. On the **CA Policy: Create** page, enter details in the **Policy Details** section as described in the tables below.

Policy Details - Field and Description Table

Field Name	Description
*Policy Name	Provide a unique name to identify the CA policy name. NOTE: No special characters other than '.', '-', and '_' are allowed. The name should not start with special characters.
Description	Provide a description of the policy.
Type	Select Strict (or) Suggestive. By default, Strict is selected. • Strict - This enforces the standards defined in the policy where a user cannot modify any parameters. • Suggestive - This suggests users with policy parameters. A user can modify suggested values if required.
Approval Required	When enabled, it will enforce the peer approval process for any requests made for new/renew/regenerate/reissue or revocation of certificates. Peer approving the request is defined in the approval workflow
Private Key Access	When enabled allows the user to download private keys from the holistic view.

Field Name	Description
Include Root and Intermediate certificates for compliance check	Enabling the option would validate if the Issuer and Root of the certificate are also compliant with the standard defined in the policy.
*: Mandatory fields	

- In the **CA Details** section, a list box **Certificate Authority** on the left displays all the available CAs. Select **Hashicorp Vault**.
- Update the following fields in the **CA Details** section as described in the table below.

CA Details - Field and Description Table

Field Name	Description
*CA Settings	The dropdown contains the names of the accounts created.
*Secret Engine	The single-select dropdown contains all the secret engines associated with the account. In a secret engine, a role describes an identity with a set of permissions, groups, or policies you want to attach to a user of the secret engine. User identity is often mapped to a specific role. Hence, a single secret engine needs to be selected to populate Role (below) specific to it.
*Role	The dropdown contains all the roles mapped to the secret engine.
*: Mandatory fields	

- Click the **Add** button.

The **HashiCorp Vault CA Details** table below the Add button displays the selected values in the dropdown.

Multiple values can be configured based on the available CA settings and secret engines with different *Bit Length - Key Type* and *Hash Function*. The supported values are as follows:

- Key Type:** RSA, EC
- Bit Length:**

i. *RSA key type*: 2048 (default), 3072, or 4096

ii. *EC key type*: 224, 256 (default), 384, or 521

c. **Hash Function**: SHA-256, SHA-384, SHA-512

The CA Details table has options to View, Edit, and Delete.

a. To view the CA details, click the View link in the View column - The CA account details are displayed in a pop-up window with the *Bit Length - Key Type* and *Hash Function*.

b. To update the CA details, select the edit or pencil icon in the Edit column.

c. To delete the CA details, select the bin or delete icon.

7. Update the Certificate Parameters in the CA details section as described in the table below.



Note: The parameters are useful during certificate enrollment. One can pre-populate the listed certificate parameters when setting-up/requesting a certificate.

Certificate Parameters - Field and Description Table

Field Name	Description
Common Name	Enter the fully qualified domain name (FQDN) or common name that exactly matches the web browser. NOTE: The only special characters allowed are the asterisk (*), hyphen (-), and period (.).
Organization	The name of the organization.
Organization Unit	The name of the organization unit.
Locality	The city in which the organization is located.
State	The state in which the organization is located.
Country	Country in which the organization is located.
Email	The email Ids of the organization contact. NOTE: Multiple comma-separated values are allowed.

Field Name	Description
	<i>Example:</i> admin@email.com, user@email.com
Subject Alternative Name	Enter the additional hostnames such as alternative websites or IP addresses that have to be protected with a single SSL certificate. It helps enforce additional domains for which a certificate can be requested. Subject Alternative Name is enforced while performing certificate request operations such as New, Renew, and Regenerate. NOTE: The only special characters allowed are the asterisk (*), hyphen (-), period (.), and the at sign (@).
 Note: The discovered certificate's parameters (Organization, Organization Unit, Locality, State, Country, and Email) will be compared against the same parameters provided in the policy to identify if they are complaints. They are enforced while performing any certificate request operations such as New, Renew, and Regenerate. <i>*: Mandatory fields</i>	

- Click the **Save CA Details** button.

A green tick mark is displayed in the Certificate Authority pane against the HashiCorp Vault option to indicate the details are successfully saved.

- In the **Group Selection**, select one or more groups to map to the policy. Refer to the **Certificate Group** section to add/update groups.
 - Under the **Compliance Check** section, enable the **Perform Compliance Check** option to perform an immediate compliance check.
 - Click the **Create Policy** button.
- The Policy is created successfully.

Configuring Policy for Hydrant ID CA

To configure the Hydrant ID CA policy:

1. Go to **menu > KUBE+ > Groups & Policies > CA Policy**.

On the **CA Policy** page, the configured policies are displayed, if any.



Note: KUBE+ is packaged with default policies they are Default and Certificate-Gateway.

2. Create a custom policy by clicking the **Create** button on the upper right corner of the CA Policy page.
3. Refer [Configuring Policy Details](#) section to configure the following,
 - **Policy Details**
 - **Group Selection**
 - **Compliance Check**
4. On the **CA Policy: Create** page, click **Hydrant ID** in the **Certificate Authority** pane on the left side of the page.
5. In the **Vendor Specific Details section**, select the challenge type from the dropdown list.
6. Click the **Add** button.
The CA details are saved to the table and the confirmation message displays.
7. You can use the **Edit** option in the table to modify the configuration and **Remove** option to delete the configuration.
8. Select **Bit Length -Key Type, ECDSA curve, Hash Function in the CA details** section.

The following table provides the field description in the **CA Details** section:

Bit Length, ECDSA curve, and Hash Function - Field and Description Table

Name	Description
*Bit Length - Key Type	All the Key Types are listed with corresponding Bit Length. You can select one (or) more than one Bit Length - Key Type(s) from the drop-down. The discovered certificate's Key Type and Bit length will be compared against the selected Bit Length - Key Type(s) to identify if they are complaint with the policy. Selected Bit Length - Key Type(s) is enforced while performing any certificate request operations such as New, Renew, Regenerate.
*ECDSA curve	When Key Type is selected as EC, ECDSA curve corresponding to selected Key Type is listed. You can

Name	Description
	select one (or) more than one ECDSA curve from the drop-down. for a certificate. The discovered certificate's Key elliptic curves will be compared against the selected ECDSA curve(s) to identify if they are complaint with the policy. Selected ECDSA curve(s) is enforced while performing certificate request operations such as New, Renew, and Regenerate. We recommend to use P256/ P384/ P521 ECDSA curve while enrolling.
*Hash Function	Supported Hash Function(s) are listed. You can select one (or) more than one Hash Function(s) from the drop-down. The discovered certificate's Key Hash Algorithm will be compared against the selected Hash Function(s) to identify if they are complaint with the policy. Selected Hash Function(s) is enforced while performing any certificate request operations such as New, Renew, Regenerate.
*: Mandatory fields	

9. You can fill the **Certificate parameters** section based on your organization's policies and standards.

The following table provides the field description in the **Certificate parameters** section:

Certificate Parameters - Field and Description Table

Name	Description
Common Name	You can provide the common name. For example, *.domain.com It helps enforce domains for which a certificate can be requested. Common Name is enforced while performing any certificate request operations such as New, Renew, and Regenerate.

Name	Description
	 Note: Use Asterisk (*) for the host part of the FQDN to enforce the domain. For example, *.domain.com will only allow users to request certificates with domain.com. Allowed Special Characters: Asterisk (*), Hyphen (-), Period (.).
Organization	You can provide the organization's name. The discovered certificate's Subject Organization will be compared against the organization provided in the policy to identify if they are complaints. The organization is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Organization Unit	You can provide an organization unit. The discovered certificate's Subject Organization Unit will be compared against the organization unit provided in the policy to identify if they are Complaint. Organization Unit is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Locality	You can provide a locality. The discovered certificate's Locality will be compared against the locality provided in the policy to identify if they are complaints. The locality is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
State	You can provide state. The discovered certificate's State will be compared against the state provided in the policy to identify if they are complaints. The state is enforced while performing any

Name	Description
	certificate request operations such as New, Renew, and Regenerate.
Country code	You can provide a country code. The discovered certificate's Country code will be compared against the country code provided in the policy to identify if they are complaints. Country code is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Email	You can provide an organization unit mail address. The discovered certificate's mail address will be compared against the email address provided in the policy to identify if they are complaints. Mail address is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Subject Alternative Name	You can provide the subject alternative name (SAN). It helps enforce additional domains for which a certificate can be requested. Subject Alternative Name is enforced while performing certificate request operations such as New, Renew, and Regenerate.  Note: Use Asterisk (*) for the host part of the FQDN to enforce the domain. For example, *.domain.com will only allow users to request certificates with domain domain.com. Allowed Special Characters: Asterisk (*), Hyphen (-), Period (.), At (@).
*: Mandatory fields	

10. Click the **Save CA Details** button to save the configuration. A green tick mark will be displayed in the **Certificate Authority** pane against the **Hydrant ID** option to indicate the details are successfully stored.
11. Click the **Create Policy** button to create a new policy.
The policy is created and a confirmation message displays.

Configuring Policy for Let's Encrypt CA

To configure the Let's Encrypt CA policy:

1. Go to **menu > KUBE+ > Groups & Policies > CA Policy**.
On the **CA Policy** page, the configured policies are displayed, if any.



Note: KUBE+ is packaged with default policies they are Default and Certificate-Gateway.

2. Create a custom policy by clicking the **Create** button on the upper right corner of the CA Policy page.
3. Click **+ Create** on the top-right of the page.

The **CA Policy: Create** page is displayed.

4. Refer [Configuring Policy Details](#) section to configure the following:
 - **Policy Details**
 - **Group Selection**
 - **Compliance Check**
5. To configure a policy with LetsEncrypt details, click **LetsEncrypt** in the **Certificate Authority** pane on the left side of the page.
6. In the **Vendor Specific Details section**, select the challenge type from the dropdown list.
7. Click the **Add** button.
The CA details are saved to the table and the confirmation message displays.
8. You can use the **Edit** option in the table to modify the configuration and **Remove** option to delete the configuration.
9. Select **Bit Length -Key Type, ECDSA curve, Hash Function in the CA details** section.

The following table provides the field description in the **CA Details** section:

Bit Length, ECDSA curve, and Hash Function - Field and Description Table

Name	Description	Purpose
*Bit Length - Key Type	All the Key Types are listed with corresponding Bit Length .	

Name	Description	Purpose
	You can select one (or) more than one Bit Length - Key Type(s) from the drop-down. The discovered certificate's Key Type and Bit length will be compared against the selected Bit Length - Key Type(s) to identify if they are complaint with the policy. Selected Bit Length - Key Type(s) is enforced while performing any certificate request operations such as New, Renew, and Regenerate.	
*ECDSA curve	When Key Type is selected as EC, ECDSA curve corresponding to selected Key Type is listed. You can select one (or) more than one ECDSA curve from the drop-down. for a certificate. The discovered certificate's Key elliptic curves will be compared against the selected ECDSA curve(s) to identify if they are complaint with the policy. Selected ECDSA curve(s) is enforced while performing certificate request operations such as New, Renew, and Regenerate. We recommend to use P256/ P384/ P521 ECDSA curve while enrolling.	

Name	Description	Purpose
*Hash Function	Supported Hash Function(s) are listed. You can select one (or) more than one Hash Function(s) from the drop-down. The discovered certificate's Key Hash Algorithm will be compared against the selected Hash Function(s) to identify if they are complaint with the policy. Selected Hash Function(s) is enforced while performing any certificate request operations such as New, Renew, and Regenerate.	
*: Mandatory fields		

10. You can fill the **Certificate parameters** section based on your organization's policies and standards.

The following table provides the field description in the **Certificate parameters** section:

Certificate Parameters - Field and Description Table

Name	Description
Common Name	You can provide the common name. For example, *.domain.com. It helps enforce domains for which a certificate can be requested. Common Name is enforced while performing any certificate request operations such as New, Renew, and Regenerate.

Name	Description
	 Note: Use Asterisk (*) for the host part of the FQDN to enforce the domain. For example, *.domain.com will only allow users to request certificates with domain.com. Allowed Special Characters: Asterisk (*), Hyphen (-), Period (.).
Organization	You can provide the organization's name. The discovered certificate's Subject Organization will be compared against the organization provided in the policy to identify if they are complaints. The organization is enforced while performing any certificate request operations such as New, Renew, Regenerate.
Organization Unit	You can provide an organization unit. The discovered certificate's Subject Organization Unit will be compared against the organization unit provided in the policy to identify if they are Complaint. Organization Unit is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Locality	You can provide a locality. The discovered certificate's Locality will be compared against the locality provided in the policy to identify if they are complaints. The locality is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
State	You can provide state. The discovered certificate's State will be compared against the state provided in the policy to identify if they are complaints.

Name	Description
	The state is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Country code	You can provide a country code. The discovered certificate's Country code will be compared against the country code provided in the policy to identify if they are complaints. Country code is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Email	You can provide an organization unit mail address. The discovered certificate's mail address will be compared against the email address provided in the policy to identify if they are complaints. Mail address is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Subject Alternative Name	You can provide the subject alternative name (SAN). It helps enforce additional domains for which a certificate can be requested. Subject Alternative Name is enforced while performing certificate request operations such as New, Renew, and Regenerate.  Note: Use Asterisk (*) for the host part of the FQDN to enforce the domain. For example, *.domain.com will only allow users to request certificates with domain domain.com. Allowed Special Characters: Asterisk (*), Hyphen (-), Period (.), At (@).
*: Mandatory fields	

11. Click the **Save CA Details** button to save the configuration. A green tick mark will be displayed in the **Certificate Authority** pane against the **LetsEncrypt** option to indicate the details are successfully stored.
12. Click the **Create Policy** button to create a new policy.
The policy is created and a confirmation message displays.

Configuring Policy for Microsoft Enterprise CA

To configure the Microsoft Enterprise CA policy:

1. Go to **menu > KUBE+ > Groups & Policies > CA Policy**.
On the **CA Policy** page, the configured policies are displayed, if any.



Note: KUBE+ is packaged with default policies they are Default and Certificate-Gateway.

2. Create a custom policy by clicking the **Create** button on the upper right corner of the CA Policy page.
3. Click **+ Create** on the top-right of the page.

The **CA Policy: Create** page is displayed.

4. Refer [Configuring Policy Details](#) section to configure the following:
 - **Policy Details**
 - **Group Selection**
 - **Compliance Check**
5. To configure a policy with Microsoft Enterprise details, click **Microsoft Enterprise** in the **Certificate Authority** pane on the left side of the screen.

The following table provides the field description under **CA Details** section:

CA Details - Field and Description Table

Name	Description
*CA Accounts	The Microsoft Enterprise CA accounts configured in the CA settings screen are listed. Select a CA account from the list to create the policy.
*MS Template List	The MS template(s) configured for the selected CA account are listed. Select MS template(s) from the list to associate with the policy.
*: Mandatory fields	

6. Select **CA accounts** and **MS Template List** under **CA details** section.
7. Click **Add** button. The CA details are saved to the table and the confirmation message displays.
8. You can use **the Edit** option in the table to modify the configuration and **Remove** option to delete the configuration.
9. In the **CA details** section, select **Bit Length -Key Type, ECDSA curve, and Hash Function**.

The following table provides the field description in the **CA Details** section:

Bit Length, ECDSA curve, and Hash Function - Field and Description Table

Name	Description
*Bit Length - Key Type	All the Key Types are listed with corresponding Bit Length. You can select one (or) more than one Bit Length - Key Type(s) from the drop-down. The discovered certificate's Key Type and Bit length will be compared against the selected Bit Length - Key Type(s) to identify if they are complaint with the policy. Selected Bit Length - Key Type(s) is enforced while performing any certificate request operations such as New, Renew, Regenerate.
*ECDSA curve	When Key Type is selected as EC, ECDSA curve corresponding to selected Key Type is listed. You can select one (or) more than one ECDSA curve from the drop-down. for a certificate. The discovered certificate's Key elliptic curves will be compared against the selected ECDSA curve(s) to identify if they are complaint with the policy. Selected ECDSA curve(s) is enforced while performing certificate request operations such as New, Renew, and Regenerate. We recommend to use P256/ P384/ P521 ECDSA curve while enrolling.
*Hash Function	Supported Hash Function(s) are listed. You can select one (or) more than one Hash Function(s) from the drop-down. The discovered certificate's Key Hash Algorithm will be compared against the selected Hash Function(s) to identify if they are complaint with the policy. Selected Hash Function(s) is enforced while performing any certificate request operations such as New, Renew, Regenerate.
*: Mandatory fields	

10. You can fill the **Certificate parameters** section based on your organization's policies and standards.

The following table provides the field description in the **Certificate parameters** section:

Certificate Parameters - Field and Description Table

Name	Description
Common Name	You can provide the common name. For example, *.domain.com It helps enforce domains for which a certificate can be requested. Common Name is enforced while performing any certificate request operations such as New, Renew, and Regenerate.  Note: Use Asterisk (*) for the host part of the FQDN to enforce the domain. For example, *.domain.com will only allow users to request certificates with domain.com. Allowed Special Characters: Asterisk (*), Hyphen (-), Period (.).
Organization	You can provide the organization's name. The discovered certificate's Subject Organization will be compared against the organization provided in the policy to identify if they are complaints. The organization is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Organization Unit	You can provide an organization unit. The discovered certificate's Subject Organization Unit will be compared against the organization unit provided in the policy to identify if they are Complaint. Organization Unit is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Locality	You can provide a locality. The discovered certificate's Locality will be compared against the locality provided in the policy to identify if they are complaints.

Name	Description
	The locality is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
State	You can provide state. The discovered certificate's State will be compared against the state provided in the policy to identify if they are complaints. The state is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Country code	You can provide a country code. The discovered certificate's Country code will be compared against the country code provided in the policy to identify if they are complaints. Country code is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Email	You can provide an organization unit mail address. The discovered certificate's mail address will be compared against the email address provided in the policy to identify if they are complaints. Mail address is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Subject Alternative Name	You can provide the subject alternative name (SAN) It helps enforce additional domains for which a certificate can be requested. Subject Alternative Name is enforced while performing certificate request operations such as New, Renew, and Regenerate.

Name	Description
	 Note: Use Asterisk (*) for the host part of the FQDN to enforce the domain. For example, *.domain.com will only allow users to request certificates with domain domain.com. Allowed Special Characters: Asterisk (*), Hyphen (-), Period (.), At (@).
*: Mandatory fields	

- Click the **Save CA Details** button to save the configuration. A green tick mark will be displayed in the **Certificate Authority** pane against the **Microsoft Enterprise** option to indicate the details are successfully stored.
- Click the **Create Policy** button to create a new policy.
- The policy is created and a confirmation message displays.

Configuring Policy for Microsoft Standalone CA

To configure the Microsoft Standalone CA policy:

- Go to **menu > KUBE+ > Groups & Policies > CA Policy**.

On the **CA Policy** page, the configured policies are displayed, if any.



Note: KUBE+ is packaged with default policies they are Default and Certificate-Gateway.

- Create a custom policy by clicking the **Create** button on the upper right corner of the CA Policy page.
- Click **+ Create** on the top-right of the page.

The **CA Policy: Create** page is displayed.

- Refer [Configuring Policy Details](#) section to configure the following:
 - Policy Details**
 - Group Selection**
 - Compliance Check**
- To configure a policy with Microsoft Standalone details, click **Microsoft Standalone** in the **Certificate Authority** pane on the left side of the screen.

The following table provides the field description in the **CA Details** section:

CA Details - Field and Description Table

Name	Description
*CA Accounts	The Microsoft Standalone accounts configured in CA settings screen are listed. Select a CA account from the list to create the policy.
*: <i>Mandatory fields</i>	

6. Select **CA accounts** in the **CA details** section.
7. Click **Add** button. The CA account is saved to the table and confirmation message displays.
8. You can use the **Remove** option to delete the configuration.
9. In the **CA details** section, select the **Bit Length -Key Type, ECDSA curve, and Hash Function**.

The following table provides the description of other fields in the **CA Details** section:

Bit Length, ECDSA curve, and Hash Function - Field and Description Table

Name	Description
*Bit Length - Key Type	All the Key Types are listed with corresponding Bit Length. You can select one (or) more than one Bit Length - Key Type(s) from the drop-down. The discovered certificate's Key Type and Bit length will be compared against the selected Bit Length - Key Type(s) to identify if they are complaint with the policy. Selected Bit Length - Key Type(s) is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
*ECDSA curve	When Key Type is selected as EC, ECDSA curve corresponding to selected Key Type is listed. You can select one (or) more than one ECDSA curve from the drop-down for a certificate. The discovered certificate's Key elliptic curves will be compared against the selected ECDSA curve(s) to identify if they are complaint with the policy. Selected ECDSA curve(s) is enforced while performing certificate request operations such as New, Renew, and Regenerate. We

Name	Description
	recommend to use P256/ P384/ P521 ECDSA curve while enrolling.
*Hash Function	Supported Hash Function(s) are listed. You can select one (or) more than one Hash Function(s) from the drop-down. The discovered certificate's Key Hash Algorithm will be compared against the selected Hash Function(s) to identify if they are complaint with the policy. Selected Hash Function(s) is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
*: Mandatory fields	

10. You can fill the **Certificate parameters** section based on your organization's policies and standards.

The following table provides the field description under **Certificate parameters** section:

Certificate Parameters - Field and Description Table

Name	Description
Common Name	You can provide the common name. For example, *.domain.com. It helps enforce domains for which a certificate can be requested. Common Name is enforced while performing any certificate request operations such as New, Renew, and Regenerate.  Note: Use Asterisk (*) for the host part of the FQDN to enforce the domain. For example, *.domain.com will only allow users to request certificates with domain.com. Allowed Special Characters: Asterisk (*), Hyphen (-), Period (.).
Organization	You can provide the organization's name. The discovered certificate's Subject Organization will be compared against the organization provided in the policy to

Name	Description
	identify if they are complaints. The organization is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Organization Unit	You can provide an organization unit. The discovered certificate's Subject Organization Unit will be compared against the organization unit provided in the policy to identify if they are Complaint. Organization Unit is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Locality	You can provide a locality. The discovered certificate's Locality will be compared against the locality provided in the policy to identify if they are complaints. The locality is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
State	You can provide state. The discovered certificate's State will be compared against the state provided in the policy to identify if they are complaints. The state is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Country code	You can provide a country code. The discovered certificate's Country code will be compared against the country code provided in the policy to identify if they are complaints. Country code is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Email	You can provide an organization unit mail address.

Name	Description
	The discovered certificate's mail address will be compared against the email address provided in the policy to identify if they are Complaint. Mail address is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Subject Alternative Name	You can provide the subject alternative name (SAN). It helps enforce additional domains for which a certificate can be requested. Subject Alternative Name is enforced while performing certificate request operations such as New, Renew, and Regenerate.  Note: Use Asterisk (*) for the host part of the FQDN to enforce the domain. For example, *.domain.com will only allow users to request certificates with domain domain.com. Allowed Special Characters: Asterisk (*), Hyphen (-), Period (.), At (@).
*: Mandatory fields	

- Click the **Save CA Details** button to save the configuration. A green tick mark will be displayed in the **Certificate Authority** pane against **Microsoft Standalone** option to indicate the details are successfully stored.
- Click the **+ Create Policy** button to create a new policy.
- The policy is created and a confirmation message displays.

Configuring Policy for Nexus CA

To configure the Nexus CA policy:

- Go to **menu > KUBE+ > Groups & Policies > CA Policy**.

On the **CA Policy** page, the configured policies are displayed, if any.



Note: KUBE+ is packaged with default policies they are Default and Certificate-Gateway.

2. Create a custom policy by clicking the **Create** button on the upper right corner of the CA Policy page.
3. Click **+ Create** on the top-right of the page.

The **CA Policy: Create** page is displayed.

4. Refer [Configuring Policy Details](#) section to configure the following:
 - **Policy Details**
 - **Group Selection**
 - **Compliance Check**
5. To configure a policy with Nexus details, click **Nexus** in the **Certificate Authority** pane on the left side of the screen.
6. Select **CA accounts and Certificate Type** under the **CA details** section and provide the **Validity** period.

The following table provides the field description under **CA Details** section:

CA Details - Field and Description Table

Name	Description
*CA Accounts	The Nexus CA accounts configured in the CA settings screen are listed. Select a CA account from the list to create the policy.
*Certificate Type	The Certificate Types corresponding to the selected CA account are listed. Select one (or) more Certificate Type from the list to create the policy.
*Validity	Provide the value and press Enter . Enforce Validity period for selected Certificate Type(s). The validity for Nexus CA can be represented in Day(s)/ Month(s)/ Year(s). One (or) more than one Validity period can be added.
<i>*: Mandatory fields</i>	

7. Once the CA account and the validity fields are populated, a new section called **Vendor Specific Details** is enabled. Select the **Procedure** field from the drop-down list and click **Add** to save the CA details to the table. You can also use the **Remove** option to delete the configuration.

Select the details as follows:

- a. **Case 1** - Select **Server** check box, the procedures listed in the **Procedures** dropdown will be - Mapped to servers and default procedures.
- b. **Case 2** - Select **Client** check box, the procedures listed in the **Procedures** dropdown will be - mapped to client and default procedures.
- c. **Case 2** - Select **Server** and **Client** check box, the procedures listed in the **Procedures** dropdown will be - mapped to server, client, and default procedures.



Note: The procedures displayed in the dropdown should have the **cert type** appended in the value. For example: - *Procedure name_Server/client/default/Code-Signing*

8. Click the **Add** button. The CA details are saved to the table and the confirmation message displays.
9. You can use the **Edit** option in the table to modify the configuration and **Remove** option to delete the configuration.
10. In the **CA details** section, select **Bit Length -Key Type, ECDSA curve, and Hash Function**.

The following table provides the field description under **CA Details** section:

Bit Length, ECDSA curve, and Hash Function - Field and Description Table

Name	Description
*Bit Length - Key Type	All the Key Types are listed with corresponding Bit Length. You can select one (or) more than one Bit Length - Key Type(s) from the drop-down. The discovered certificate's Key Type and Bit length will be compared against the selected Bit Length - Key Type(s) to identify if they are complaint with the policy. Selected Bit Length - Key Type(s) is enforced while performing any certificate request operations such as New, Renew, Regenerate.
*ECDSA curve	When Key Type is selected as EC, ECDSA curve corresponding to selected Key Type is listed. You can select one (or) more than one ECDSA curve from the drop-down for a certificate. The discovered certificate's Key elliptic curves will be compared against the selected ECDSA curve(s) to identify if they are complaint with the policy. Selected ECDSA curve(s) is enforced while performing

Name	Description
	certificate request operations such as New, Renew, and Regenerate. We recommend using P256/ P384/ P521 ECDSA curve while enrolling.
*Hash Function	Supported Hash Function(s) are listed. You can select one (or) more than one Hash Function(s) from the drop-down. The discovered certificate's Key Hash Algorithm will be compared against the selected Hash Function(s) to identify if they are complaint with the policy. Selected Hash Function(s) is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
*: Mandatory fields	

11. You can fill the **Certificate parameters** section based on your organization's policies and standards.

The following table provides the field description in the **Certificate parameters** section:

Certificate Parameters - Field and Description Table

Name	Description
Common Name	You can provide the common name. For example, *.domain.com. It helps enforce domains for which a certificate can be requested. Common Name is enforced while performing any certificate request operations such as New, Renew, and Regenerate.  Note: Use Asterisk (*) for the host part of the FQDN to enforce the domain. For example, *.domain.com will only allow users to request certificates with domain.com. Allowed Special Characters: Asterisk (*), Hyphen (-), Period (.).

Name	Description
Organization	You can provide the organization's name. The discovered certificate's Subject Organization will be compared against the organization provided in the policy to identify if they are complaints. The organization is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Organization Unit	You can provide an organization unit. The discovered certificate's Subject Organization Unit will be compared against the organization unit provided in the policy to identify if they are Complaint. Organization Unit is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Locality	You can provide a locality. The discovered certificate's Locality will be compared against the locality provided in the policy to identify if they are complaints. The locality is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
State	You can provide state. The discovered certificate's State will be compared against the state provided in the policy to identify if they are complaints. The state is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Country code	You can provide a country code. The discovered certificate's Country code will be compared against the country code provided in the policy to identify if they are complaints. Country code is enforced while performing

Name	Description
	any certificate request operations such as New, Renew, and Regenerate.
Email	You can provide an organization unit mail address. The discovered certificate's mail address will be compared against the email address provided in the policy to identify if they are complaints. Mail address is enforced while performing any certificate request operations such as New, Renew, Regenerate.
Subject Alternative Name	You can provide the subject alternative name (SAN). It helps enforce additional domains for which a certificate can be requested. Subject Alternative Name is enforced while performing certificate request operations such as New, Renew, and Regenerate.  Note: Use Asterisk (*) for the host part of the FQDN to enforce the domain. For example, *.domain.com will only allow users to request certificates with domain domain.com. Allowed Special Characters: Asterisk (*), Hyphen (-), Period (.), At (@).
*: Mandatory fields	

12. Click the **Save CA Details** button to save the configuration. A green tick mark will be displayed in the **Certificate Authority** pane against the **Nexus** option to indicate the details are successfully stored.
13. Click **Create Policy** button to create a new policy.
14. The policy is created and a confirmation message displays.

Configuring Policy for OpenTrust CA

To configure the OpenTrust CA policy:

1. Go to **menu > KUBE+ > Groups & Policies > CA Policy**.
On the **CA Policy** page, the configured policies are displayed, if any.



Note: KUBE+ is packaged with default policies they are Default and Certificate-Gateway.

2. Create a custom policy by clicking the **Create** button on the upper right corner of the CA Policy page.
3. Click **+ Create** on the top-right of the page.

The **CA Policy: Create** page is displayed.

4. Refer [Configuring Policy Details](#) section to configure the following:
 - **Policy Details**
 - **Group Selection**
 - **Compliance Check**
5. To configure a policy with OpenTrust details, click OpenTrust in the **Certificate Authority** pane on the left side of the page.

The following table provides the field description in the **CA Details** section.

Field	Description
* CA Account	The OpenTrust CA accounts configured in CA settings screen are listed. Select a CA account from the list to create the policy.
* Certificate Management Profile	Select the certificate management profile from the dropdown list.
*Zone	Select the zone from the dropdown list.
*: <i>Mandatory fields</i>	

6. In the **Profile Parameters** section, select/enter the details as listed in the table.

Profile Parameters Section - Field and Description Table

Field	Description
* Common Name	Enter the common name for the policy.
Organizational Unit	Enter the organizational unit.
Organization	Enter the name of the organization.
*: <i>Mandatory fields</i>	

7. Click the **Add** button.

The CA details are saved to the table and the confirmation message displays.

8. You can use the **Remove** option to delete the configuration.

9. In the **CA details** section, select **Bit Length -Key Type, ECDSA curve, and Hash Function**.

The following table provides the description of other fields in the **CA Details** section:

Bit Length, ECDSA curve, and Hash Function - Field and Description Table

Name	Description
*Bit Length - Key Type	All the Key Types are listed with corresponding Bit Length. You can select one (or) more than one Bit Length - Key Type(s) from the drop-down. The discovered certificate's Key Type and Bit length will be compared against the selected Bit Length - Key Type(s) to identify if they are complaint with the policy. Selected Bit Length - Key Type(s) is enforced while performing any certificate request operations such as New, Renew, Regenerate.
*ECDSA curve	When Key Type is selected as EC, ECDSA curve corresponding to selected Key Type is listed. You can select one (or) more than one ECDSA curve from the drop-down. for a certificate. The discovered certificate's Key elliptic curves will be compared against the selected ECDSA curve(s) to identify if they are complaint with the policy. Selected ECDSA curve(s) is enforced while performing certificate request operations such as New, Renew, and Regenerate. We recommend to use P256/ P384/ P521 ECDSA curve while enrolling.
*Hash Function	SupportedHash Function(s) are listed. You can select one (or) more than one Hash Function(s) from the drop-down.

Name	Description
	The discovered certificate's Key Hash Algorithm will be compared against the selected Hash Function(s) to identify if they are complaint with the policy. Selected Hash Function(s) is enforced while performing any certificate request operations such as New, Renew, Regenerate.
*: Mandatory fields	

10. You can fill the **Certificate parameters** section based on your organization's policies and standards.

The following table provides the field description under the **Certificate parameters** section:

Certificate Parameters - Field and Description Table

Name	Description
Common Name	You can provide the common name. For example, *.domain.com It helps enforce domains for which a certificate can be requested. Common Name is enforced while performing any certificate request operations such as New, Renew, and Regenerate.  Note: Use Asterisk (*) for the host part of the FQDN to enforce the domain. For example, *.domain.com will only allow users to request certificates with domain.com. Allowed Special Characters: Asterisk (*), Hyphen (-), Period (.).
Organization	You can provide the organization's name. The discovered certificate's Subject Organization will be compared against the organization provided in the policy to identify if they are complaints. The organization is enforced while performing any certificate request operations such as New, Renew, and Regenerate.

Name	Description
Organization Unit	You can provide an organization unit. The discovered certificate's Subject Organization Unit will be compared against the organization unit provided in the policy to identify if they are Complaint. Organization Unit is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Locality	You can provide a locality. The discovered certificate's Locality will be compared against the locality provided in the policy to identify if they are complaints. The locality is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
State	You can provide state. The discovered certificate's State will be compared against the state provided in the policy to identify if they are complaint. The state is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Country code	You can provide a country code. The discovered certificate's Country code will be compared against the country code provided in the policy to identify if they are complaints. Country code is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Email	You can provide an organization unit mail address. The discovered certificate's mail address will be compared against the email address provided in the policy to identify if they are Complaint. Mail address is enforced while performing

Name	Description
	any certificate request operations such as New, Renew, and Regenerate.
Subject Alternative Name	You can provide the subject alternative name (SAN) It helps enforce additional domains for which a certificate can be requested. Subject Alternative Name is enforced while performing certificate request operations such as New, Renew, and Regenerate.  Note: Use Asterisk (*) for the host part of the FQDN to enforce the domain. For example, *.domain.com will only allow users to request certificates with domain domain.com. Allowed Special Characters: Asterisk (*), Hyphen (-), Period (.), At (@).
*: Mandatory fields	

- Click the **Save CA Details** button to save the configuration. A green tick mark displays in the **Certificate Authority** pane against the **OpenTrust** option to indicate the details are successfully stored.
- Click **Create Policy** button to create a new policy.
- The policy is created and a confirmation message displays.

Configuring Policy for Symantec CA

To configure the Symantec CA policy:

- Go to **menu > KUBE+ > Groups & Policies > CA Policy**.
On the **CA Policy** page, the configured policies are displayed, if any.



Note: KUBE+ is packaged with default policies they are Default and Certificate-Gateway.

- Create a custom policy by clicking the **Create** button on the upper right corner of the CA Policy page.
- Click **+ Create** on the top-right of the page.

The **CA Policy: Create** page is displayed.

4. Refer [Configuring Policy Details](#) section to configure the following:
 - **Policy Details**
 - **Group Selection**
 - **Compliance Check**
5. To configure a policy with Symantec details, click **Symantec** in the **Certificate Authority** pane on the left side of the page.

The following table provides the field description in the **CA Details** section.

CA Details - Field and Description Table

Field	Description
*CA Account	The Symantec CA accounts configured in CA settings screen are listed. Select a CA account from the list to create the policy.
*Certificate Type	The Certificate Types corresponding to the selected CA account are listed. Select one (or) more Certificate Type from the list to create the policy.
*Validity	Enter the validity period for the certificate. The available options are: Days - You can enter more than one validity period in days, to choose one in certificate enrolment. Month - You can enter more than one validity period in Months, to choose one in certificate enrolment. Year - You can enter more than one validity period in Year, to choose one in certificate enrolment.
*: Mandatory fields	

6. In the **Vendor Specific Details section**, select the server type from the dropdown list.
7. Click the **Add** button.
The CA details are saved to the table and the confirmation message displays.
8. You can use the **Edit** option in the table to modify the configuration and **Remove** option to delete the configuration.
9. In the **CA details** section, select **Bit Length -Key Type, ECDSA curve, and Hash Function**.

The following table provides the field description in the **CA Details** section:

Bit Length, ECDSA curve, and Hash Function - Field and Description Table

Name	Description	Purpose
*Bit Length - Key Type	All the Key Types are listed with corresponding Bit Length . You can select one (or) more than one Bit Length - Key Type(s) from the drop-down.	The discovered certificate's Key Type and Bit length will be compared against the selected Bit Length - Key Type(s) to identify if they are complaint with the policy. Selected Bit Length - Key Type(s) is enforced while performing any certificate request operations such as New, Renew, Regenerate.
*ECDSA curve	When Key Type is selected as EC, ECDSA curve corresponding to selected Key Type is listed. You can select one (or) more than one ECDSA curve from the drop-down for a certificate.	The discovered certificate's Key elliptic curves will be compared against the selected ECDSA curve(s) to identify if they are complaint with the policy. Selected ECDSA curve(s) is enforced while performing certificate request operations such as New, Renew, and Regenerate. We recommend using P256/ P384/ P521 ECDSA curve while enrolling.
*Hash Function	Supported Hash Function(s) are listed. You can select one (or) more than one Hash Function(s) from the drop-down.	The discovered certificate's Key Hash Algorithm will be compared against the selected Hash Function(s) to identify if they are complaint with the policy. Selected Hash Function(s) is enforced while performing any certificate request operations such as New, Renew, Regenerate.
*: <i>Mandatory fields</i>		

10. You can fill the **Certificate parameters** section based on your organization's policies and standards.

The following table provides the field description in the **Certificate parameters** section:

Certificate Parameters - Field and Description Table

Name	Description
Common Name	You can provide the common name. For example, *.domain.com. It helps enforce domains for which a certificate can be requested. Common Name is enforced while performing any certificate request operations such as New, Renew, and Regenerate.  Note: Use Asterisk (*) for the host part of the FQDN to enforce the domain. For example, *.domain.com will only allow users to request certificates with domain.com. Allowed Special Characters: Asterisk (*), Hyphen (-), Period (.).
Organization	You can provide the organization's name. The discovered certificate's Subject Organization will be compared against the organization provided in the policy to identify if they are complaints. The organization is enforced while performing any certificate request operations such as New, Renew, Regenerate.
Organization Unit	You can provide an organization unit. The discovered certificate's Subject Organization Unit will be compared against the organization unit provided in the policy to identify if they are Complaint. Organization Unit is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Locality	You can provide a locality. The discovered certificate's Locality will be compared against the locality provided in the policy to identify if they are complaints. The locality is enforced while performing any certificate request operations such as New, Renew, and Regenerate.

Name	Description
State	You can provide state. The discovered certificate's State will be compared against the state provided in the policy to identify if they are complaints. The state is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Country code	You can provide a country code. The discovered certificate's Country code will be compared against the country code provided in the policy to identify if they are complaints. Country code is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Email	You can provide an organization unit mail address. The discovered certificate's mail address will be compared against the email address provided in the policy to identify if they are Complaint. Mail address is enforced while performing any certificate request operations such as New, Renew, Regenerate.
Subject Alternative Name	You can provide the subject alternative name (SAN). It helps enforce additional domains for which a certificate can be requested. Subject Alternative Name is enforced while performing certificate request operations such as New, Renew, and Regenerate.  Note: Use Asterisk (*) for the host part of the FQDN to enforce the domain. For example, *.domain.com will only allow users to request certificates with domain domain.com. Allowed Special Characters: Asterisk (*), Hyphen (-), Period (.), At (@).

Name	Description
*: Mandatory fields	

11. Click the **Save CA Details** button to save the configuration. A green tick mark will be displayed in the **Certificate Authority** pane against the **Symantec** option to indicate the details are successfully stored.
12. Click the **Create Policy** button to create a new policy.
13. The policy is created and a confirmation message displays.

Configuring Policy for Trustwave CA

To configure the Trustwave CA policy:

1. Go to **menu > KUBE+ > Groups & Policies > CA Policy**.
On the **CA Policy** page, the configured policies are displayed, if any.



Note: KUBE+ is packaged with default policies they are Default and Certificate-Gateway.

2. Create a custom policy by clicking the **Create** button on the upper right corner of the CA Policy page.
3. Click **+ Create** on the top-right of the page.

The **CA Policy: Create** page is displayed.

4. Refer [Configuring Policy Details](#) section to configure the following:
 - **Policy Details**
 - **Group Selection**
 - **Compliance Check**
5. To configure a policy with Trustwave details, click **Trustwave** in the **Certificate Authority** pane on the left side of the screen.
6. Select **CA accounts and Certificate Type** under the **CA details** section and provide the **Validity** period.

The following table provides the field description under **CA Details** section:

CA Details - Field and Description Table

Name	Description
*CA Accounts	The Trustwave CA accounts configured in the CA settings screen are listed. Select a CA account from the list to create the policy.

Name	Description
*Certificate Type	The Certificate Types corresponding to the selected CA account are listed. Select one (or) more Certificate Type from the list to create the policy.
*Validity	Provide the value and press Enter . Enforce Validity period for selected Certificate Type(s). The validity for Trustwave CA can be represented in Day(s)/ Month(s)/ Year(s). One (or) more than one Validity period can be added.
*: <i>Mandatory fields</i>	

- Click the **Add** button. The CA details are saved to the table and the confirmation message displays.
- You can use the **Edit** option in the table to modify the configuration and **Remove** option to delete the configuration.
- In the **CA details** section, select **Bit Length -Key Type, ECDSA curve, and Hash Function**.

The following table provides the field description under **CA Details** section:

Bit Length, ECDSA curve, and Hash Function - Field and Description Table

Name	Description	Purpose
*Bit Length - Key Type	All the Key Types are listed with corresponding Bit Length . You can select one (or) more than one Bit Length - Key Type(s) from the drop-down.	The discovered certificate's Key Type and Bit length will be compared against the selected Bit Length - Key Type(s) to identify if they are complaint with the policy. Selected Bit Length - Key Type(s) is enforced while performing any certificate request operations such as New, Renew, Regenerate.
*ECDSA curve	When Key Type is selected as EC, ECDSA curve corresponding to selected Key Type is listed. You can select one (or) more than one ECDSA curve from the drop-down for a certificate.	The discovered certificate's Key elliptic curves will be compared against the selected ECDSA curve(s) to identify if they are complaint with the policy. Selected ECDSA curve(s) is enforced while performing certificate request operations such as New, Renew, and Regenerate. We recommend using P256/ P384/ P521 ECDSA curve while enrolling.

Name	Description	Purpose
*Hash Function	Supported Hash Function(s) are listed. You can select one (or) more than one Hash Function(s) from the drop-down.	The discovered certificate's Key Hash Algorithm will be compared against the selected Hash Function(s) to identify if they are complaint with the policy. Selected Hash Function(s) is enforced while performing any certificate request operations such as New, Renew, Regenerate.
*: <i>Mandatory fields</i>		

10. You can fill the **Certificate parameters** section based on your organization's policies and standards.

The following table provides the field description in the **Certificate parameters** section:

Certificate Parameters - Field and Description Table

Name	Description
Common Name	You can provide the common name. For example, *.domain.com It helps enforce domains for which a certificate can be requested. Common Name is enforced while performing any certificate request operations such as New, Renew, and Regenerate.  Note: Use Asterisk (*) for the host part of the FQDN to enforce the domain. For example, *.domain.com will only allow users to request certificates with domain.com. Allowed Special Characters: Asterisk (*), Hyphen (-), Period (.).
Organization	You can provide the organization's name. The discovered certificate's Subject Organization will be compared against the organization provided in the policy to identify if they are complaints. The organization is enforced

Name	Description
	while performing any certificate request operations such as New, Renew, and Regenerate.
Organization Unit	You can provide an organization unit. The discovered certificate's Subject Organization Unit will be compared against the organization unit provided in the policy to identify if they are Complaint. Organization Unit is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Locality	You can provide a locality. The discovered certificate's Locality will be compared against the locality provided in the policy to identify if they are complaints. The locality is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
State	You can provide state. The discovered certificate's State will be compared against the state provided in the policy to identify if they are complaints. The state is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Country code	You can provide a country code. The discovered certificate's Country code will be compared against the country code provided in the policy to identify if they are complaints. Country code is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Email	You can provide an organization unit mail address. The discovered certificate's mail address will be compared against the email address provided in the policy to identify if

Name	Description
	they are complaints. Mail address is enforced while performing any certificate request operations such as New, Renew, and Regenerate.
Subject Alternative Name	You can provide the subject alternative name (SAN). It helps enforce additional domains for which a certificate can be requested. Subject Alternative Name is enforced while performing certificate request operations such as New, Renew, and Regenerate.  Note: Use Asterisk (*) for the host part of the FQDN to enforce the domain. For example, *.domain.com will only allow users to request certificates with domain domain.com. Allowed Special Characters: Asterisk (*), Hyphen (-), Period (.), At (@).
*: Mandatory fields	

- Click the **Save CA Details** button to save the configuration. A green tick mark will be displayed in the **Certificate Authority** pane against the **Trustwave** option to indicate the details are successfully stored.
- Click **Create Policy** button to create a new policy.
- The policy is created and a confirmation message displays.

Configuring a CA Policy for Futurex

- Go to **menu > KUBE+ > Groups & Policies > CA Policy**.

On the **CA Policy** page, the configured policies are displayed, if any.



Note: KUBE+ is packaged with default policies they are Default and Certificate-Gateway.

- Click **+ Create** from the top-right corner of the page.
The **CA Policy : Create** page is displayed.
- Enter/Select the **Policy Details**.

These details define the rules and templates for a certificate policy to ensure that certificate attributes are in compliance with the organization.

Field description for Policy Details

Fields	Description
*Policy name	Enter a unique name for the CA policy. Constraints: • Only the following special characters are considered valid: ., -, and _. • The policy name cannot start with a special character (including the valid ones).
Description	Enter additional details related to the rules and guidelines enforced by the policy.
Policy Enforcement Type	The policy enforcement type defines whether users can modify the policy parameters. Depending on your requirement, select one from the following values: • Strict: This selection will enforce the standards defined in the policy, not allowing users to modify any parameters. • Suggestive: This selection will suggest policy parameters, allowing the user to modify the suggested values as required.
Certificate Requests Need Approval	To enforce peer approval process for any certificate requests raised, turn on the Certificate Requests Need Approval toggle. All CLM actions, such as certificate creation/renewal/regeneration/reissue/revocation, will now be executed after due approval is received. Peer approval for requests is defined in the approval workflow.
Enable Access to Private Key	To allow the user to download private keys from the holistic view and the certificate inventory, turn on the Enable Access to Private Key toggle..
Enable certificate push-bind access for a read-only user	To allow users with only read-only access to perform the certificate push, bind, and rollback operations from the holistic view, turn on the Enable certificate push-bind access for a read-only user toggle.
Validate issuer and root certificate for compliance?	To validate the issuer and root of a certificate for compliance with the policy standards, enable the Validate issuer and root certificate for compliance? toggle.

Fields	Description
Email Address mandatory for Client Certificate	At the time of client certificate enrollment, to set the email address field as mandatory, turn on the Email Address mandatory for Client Certificate toggle.  Note: This feature is not applicable for SwissSign CA.
Enable Public Key Validation during CSR Upload?	To validate the public key included in the CSR uploaded for certificate enrollment, renewal, regenerate, or reissuance, turn on the Enable Public Key Validation during CSR Upload? .
*: Mandatory fields	

4. In the **CA Details** section:

a. From the **Certificate Authority** list on the left, select **Futurex**.

The section is updated to display the fields required to configure a Futurex policy.

b. Enter/Select the CA details.

Field description for CA Details

Fields	Description
*CA Accounts	From the dropdown list, select the CA account names of the CA settings that will be mapped to this policy.
*Issuance Policy	From the dropdown list, select one from the list of issuance policies retrieved for the CA account name selected above. The issuance policy selected defines the set of rules and conditions under which certificates can be issued using this policy. This may include constraints like key length, usage, subject naming, and validity period.
*Root CA	From the dropdown list, select the root CA for this certificate. This is the trusted root certificate authority that anchors the certificate chain. All issued certificates will ultimately chain up to this root.
*Signing CA	From the dropdown list, select the Certificate Authority that will sign the requested certificate.

Fields	Description
*Validity	Using the Days, Months, and Years dropdown lists, select a validity period for the certificate. Days: You can enter more than one validity period in days, to choose one in certificate enrolment. Months: You can enter more than one validity period in Months, to choose one in certificate enrolment. Year: You can enter more than one validity period in Year, to choose one in certificate enrolment.
*Bit Length - Key Type	From the *Bit Length - Key Type dropdown list, select the required bit length- key type pair(s). The discovered certificates' key type and bit length will be compared against the selected bit length- key type pair(s) to check for compliance with the policy. The selected bit length- key type pair(s) is enforced while performing any certificate request operations.
*Hash Function	From the dropdown list, select one (or more) hash functions. The discovered certificates' key hash algorithm will be compared against the selected hash function to check for compliance with the policy. The selected hash function(s) is/are enforced while performing any certificate request operations.
*: <i>Mandatory fields</i>	

c. Click **Add**.

The CA details are added to the table below the **Add** button and a confirmation message is displayed.



Note: You can use the **Edit** option in the table to modify the configuration and the **Remove** option to delete the configuration.

d. Enter/Select the **Certificate Parameters** for the policy.

The parameters of a discovered certificate will be compared the values entered in this section to assess its compliance with this policy.

Field description for CA Details

Fields	Description
Restrict Wild Card Certificate	To restrict the creation of wild card certificates using this policy, turn on the Restrict Wild Card Certificate toggle. A wildcard certificate is a type of SSL/TLS certificate that secures a domain and all its subdomains using a single certificate. This could possess a security risk considering that if this certificate is compromised, all its subdomains become vulnerable.
Host Name	Enter a host name that will be used to identify the domain secured by the certificate. Constraints: • The host name cannot start and end with a . (period). • If a host name is not specified here, the user is allowed to enter a host name of their choice at the time for creating certificate requests for CLM actions.
Allowed Domain Names	Enter the domain names that must be whitelisted for this policy. Multiple domain names can entered, separated by the Enter key. If this field is left blank, by default, all domains will be whitelisted for the CLM actions that use this policy.
Blocked Domain Names	Enter the domain names that must be blacklisted for this policy. Multiple domain names can entered, separated by the Enter key. If this field is left blank, by default, all domains will be blacklisted for the CLM actions that use this policy.
Common Name	Enter the common name. For example, *.domain.com This enforces domains for which a certificate can be requested. The common name is enforced at the time of performing any certificate request operations such as New, Renew, and Regenerate.

Fields	Description
	 Note: Use the * (asterisk) for the host part of the FQDN to enforce the domain. For example, *.domain.com will only allow users to request certificates with domain.com. Allowed special characters: *(Asterisk), - (hyphen), . (period).
Organization	Enter the organization name. The discovered certificates' Subject Organization is checked for compliance with this value. The organization name is enforced while performing any certificate request operations.
Organization Unit	Enter the name of the business unit of the organization. The discovered certificates' Subject Organization Unit is checked for compliance with this value. The organization unit name is enforced while performing any certificate request operations.
Locality	Enter the organization's locality name. The discovered certificates' Locality is checked for compliance with this value. The locality name is enforced while performing any certificate request operations.
State	Enter the name of the state in which the organization is located. The discovered certificates' State is checked for compliance with this value. The state name is enforced while performing any certificate request operations.
Country code	Enter the organization's country code. The discovered certificates' Country Code is checked for compliance with this value. The state name is enforced while performing any certificate request operations.
Email	Enter the organization unit's official email address.

Fields	Description
	The email address specified for the discovered certificates' is checked for compliance with this value. The value is enforced while performing any certificate request operations.
Subject Alternative Name	Enter the subject alternative name (SAN) applicable for this policy. The SAN helps enforce additional domains for which a certificate can be requested. It is enforced at the time of performing certificate request operations.  Note: Use the * (asterisk) for the host part of the FQDN to enforce the domain. For example, *.domain.com will only allow users to request certificates with domain.com. Allowed special characters: *(Asterisk), - (hyphen), . (period)
*: Mandatory fields	

e. Click **Save CA Details**.

A green tick mark is displayed in the **Certificate Authority** list against **Futurex** to indicate that the details are successfully stored.

5. Under the **Group selection** section, select one or more groups to map to the policy.

6. Under the **Compliance Check** section, to perform an immediate compliance check, enable **Perform Compliance check**.

7. Click **Create Policy**.

The policy is created and a confirmation message is displayed.


Deleting a Policy

To delete a policy,

1. Go to **menu > KUBE+ > Groups & Policies > CA Policy**.

On the **CA Policy** page, the configured policies are displayed, if any.

2. Select a policy from the list.



3. Click .
4. On the **Confirmation** popup, click **Yes**.

Groups

Before starting the configuration of Certificate Groups, it is important to be aware of the following key points:

- **Certificate Groups** are used to classify certificates based on different business units
- In certain organizations, **Certificate Groups** are used for assigning access permissions. Only privileged users, typically those inheriting permissions from the Resource > User Group, have the ability to view the corresponding **Certificate Groups**.
- Administrators should be assigned to a **Role** that grants them access to perform the following actions:
 - Create/ modify a group
 - Delete a group
 - Edit Default group
- [Creating a Group](#)
- [Modifying a Group](#)
- [Deleting a Group](#)

Creating a Group

Assign the user to a user group that (inherits from resource and role) enables them to access the certificate group.

1. Go to **menu > KUBE+ > Groups & Policy > Groups**.



Note: KUBE+ is packaged with default certificate groups **Default** and **Certificate-Gateway** .

2. Click the **+ Create** button in the command bar to create a new group.
3. On the **Group : Create**, enter or select the required information.

Fields and Description for the Group Details Section

Name	Description
* Select Group Hierarchy	Select the parent group to which the new group should be associated
* Group Name	Enter a unique name for the new group. The name should not start with special characters and spaces. No special characters are allowed except('.', '-', '_') and name cannot end with space
Application ID	Provide organization ID (if any) to associate with the new group
Description	Provide the purpose of the new group
*: Mandatory field	

Fields and Description for the Other Details Section

Name	Description
Contact Name	Provide contact person to whom changes should be intimated
Line of Business Name	Provide the name of the business unit
Email	Provide contact mail address
Environment Name	Provide environment name
Phone Number	Provide a phone number for contact
Inventory Number	Provide inventory number
Cost Center/ Hierarchy	Provide Cost Center code/ label
Push Certificate Automatically	By enabling the check box, the renewed/ reissued certificates in this group are automatically associated with their device
Renew Automatically	Turn On to automatically renew the certificate belongs to this group.
* Associated Policy	Displays the policy associated with this group.

Name	Description
*: Mandatory field	

- Click **Create** to create the group.

Users can view the group only if it is associated with the **Resource** of their **User Group**. To associate the **Group** to a **Resource** click the **Create Group and Configure the Resources for User Access** button instead of **Create** button. This will create the group and go to **Resource**. Refer to Create a Resource section in the [Platform User guide](#) to configure user access.

- The newly created **Group** is added to the Group inventory. Click the **Name** (Group name) to view the group details.
- On the Certificate Count column, click on the count link of Server/Client/Device/Code Signing to view the certificates.



Note: After the certificate discovery, you can view the count of certificates (Server, Client, Device, and Code Signing) associated with this group.

Modifying a Group

- Go to **menu > KUBE+ > Groups & Policy > Groups**.
- On the Group Inventory page, click the **Name** (Group name).
- Modify required fields in the group and click **Update**. Field descriptions are available in [Create a Group](#) section.

Deleting a Group


- Go to **menu > KUBE+ > Groups & Policy > Groups**.
- On the group inventory page, select the check box against the group you want to delete.
- Click  Delete in the command bar.
- On the confirmation pop-up, click **Yes** to proceed.

Cluster Policy

Cluster Policy enforces security prerequisites, standardizes certificate issuance, and ensures compliance, all while promoting secure certificate management practices throughout your clusters.

On the Cluster Policy page,

- refresh the list, click the  (refresh) icon.
- go to the pages, click the  (navigation) icon.
- hover the mouse over the number of row displayed on the page, the **Show** popup opens and choose the no. of rows to be displayed on the page.

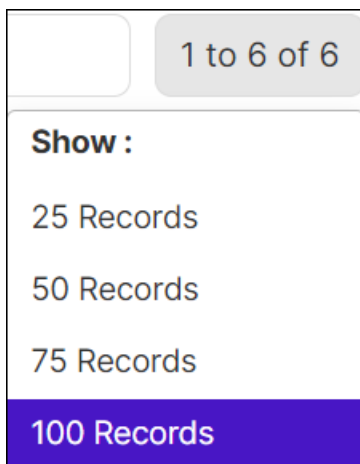

Why is Cluster Policy Essential? Cluster Policy is your toolbox of rules and guidelines that you set up to manage the safe issuance of SSL/TLS certificates within your Kubernetes cluster. AppViewX offers various ways to ensure that these policies are followed when certificates are issued.

- **CA Setting [Namespace Specific Policy Enforcement]** - A Setting policy types are used to configure a dedicated CA and manage how certificates are issued within a namespace. This gives application teams working in a specific namespace access to their dedicated CA to request certificates for their unique domains.
- **CA Setting Cluster [Cluster wide Policy Enforcement]** - The CA Setting Cluster policy type is applied when application teams deploy workloads across the entire cluster. This policy type, regardless of where the applications are located, manages certificate issuance and CA configuration. It ensures

seamless issuance of certificates from the enforced Certificate Authority and defined Policy, maintaining cluster-wide security and consistency.

- Cluster Policy also helps define in which namespace certificate discovery needs to be disabled. For example, users can define a regex like `kube-\*` to prevent certificate discovery from any namespaces starting with `kube`, like `kube-system`.

The cluster policy inventory list includes the following information:

Column and Description table

Column Name	Description
Name	Unique policy name to be associated with one or more clusters. The special characters (-) and (_) are allowed. Maximum 255 characters are allowed.
Type	Type of cluster policy.
Created By	User ID of the policy creator.
No. of Clusters	Count of clusters associated with the policy.
No. of Namespace	Count of namespaces associated.
Last Updated At	Last updated Timestamp.
Edit	Allows to modify the clusters and namespaces associated with the policy.

- [Creating a Cluster Policy Using Legacy Policy Method](#)
- [Creating a Cluster Policy Using Policy Central](#)
- [Modifying Cluster Policy](#)
- [Deleting a Cluster Policy](#)

Creating a Cluster Policy Using Legacy Policy Method

Create Policy enables the Infosec teams / PKI administrators to create, define, and enforce policies for one more cluster managed in the inventory.



Note: The certificate automations (creation, renewal, etc.) initiated from a specific cluster must adhere to the policy parameters outlined in this policy inventory. Any cluster that is not a part of or does not align with the Cluster Policy will be denied certificate automations.

Prerequisites:

- Ensure [CA integration](#) is completed.
- Ensure you configured organization PKI standards as [CA Policy](#).
- Ensure the [Group](#) is created.

To create a cluster policy:

1. Go to **menu > KUBE+ > GROUPS & POLICIES > Cluster Policy**
On the **Cluster Policy** page, the created policies are displayed, if any.
2. Click **+Create Policy** in the command bar.
The **Cluster Policy** popup window opens.
3. Under the **Legacy Policy** section, click **+Create Policy**.
4. Enter/select the policy information.

Policy Details - Field and Description Table

Field	Description
Policy Name*	Enter a unique policy name to be associated with one or more clusters.
Description	Optionally, provide a brief description of the policy for clarity and reference.
*: <i>Mandatory fields</i>	

CA Details - Field and Description Table

Field	Description
Type*	Select a type from the dropdown list. The options are: • Cluster Wide - Cluster wide global policy. • Namespace Wide - Policy to be applied for a specific namespace or a project within a cluster.
Certificate Group*	Select a certificate group from the dropdown list.
Associate CA Policy*	The CA Policy associated with the selected certificate group will be automatically populated in the dropdown. Please select the appropriate policy from this list.
Certificate Authority	Select a Certificate Authority from the dropdown list.
CA Settings	Select the CA Settings from the dropdown list.
*: Mandatory fields	

Define the CA Issuer to be used for certificate issuance for the cluster as follows:

- Click **+Add** to add CA settings.
- In the **Add CA Setting** page, enter the CA setting details.

CA Setting - Field and Description Table

Field	Description
General Information	
CA Setting Name	Enter name for the CA Settings.
Certificate Group*	Select a certificate group from the dropdown list.
Associate CA Policy*	The CA Policy associated with the selected certificate group will be automatically populated in the dropdown. Please select the appropriate policy from this list.

Field	Description
Certificate Authority Setting	
Certificate Authority	Select a Certificate Authority from the dropdown list.
CA Account*	Select a CA account from the dropdown list.
Connector Name	Enter connector name.
Category*	Select a category from the dropdown list. The options are: • Server • Client
*: Mandatory fields	

c. Click **Add**.

The CA setting will be added into the table. After adding it can be modified as needed.

Discovery Settings - Field and Description Table

Field	Description
Namespace Exclusion	Upon entering the namespace name or regex, and pressing Enter, the namespaces are added to the exclusion list and will be omitted from certificate discovery. The Server Certificate inventory will not display certificates from excluded namespaces.
*: Mandatory fields	

5. Click **Save**.

The cluster policy is added to the Cluster Policy inventory.

Related Information

- [Modifying Cluster Policy](#)

Creating a Cluster Policy Using Policy Central

Use **Policy Central** for a smarter, rule-based approach to policy creation. Predefined templates make it quick and easy to create and manage policies.

Prerequisites:

- Ensure [CA integration](#) is completed.
- Ensure you configured organization PKI standards as [CA Policy](#).
- Ensure the [Group](#) is created.

To create a cluster policy:

1. Go to **menu > KUBE+ > GROUPS & POLICIES > Cluster Policy**
On the **Cluster Policy** page, the existing policies (if any) are listed.
2. Click **+Create Policy** in the command bar.
The **Cluster Policy** popup opens.
3. Under the **Policy Central** section, click **+Create Policy**.
4. In the **Welcome to Policy Central** popup, click **Get Started**.
5. In the **Create Policy** window:
 - a. Select **Kube Cluster Policy** from the Policy Type dropdown.
 - b. Fill in the policy details:

Policy Details - Field and Description Table

Field	Description
Policy Name*	Enter a unique policy name to be associated with one or more clusters.
Description	Optionally, provide a brief description of the policy for clarity and reference.
Select a Tag	Choose a tag to categorize and manage the policy.
*: Mandatory fields	

6. Click **Configure Policy**.
The **Create a Kube Cluster Policy in 3 Simple Steps** popup displayed:
 - You may close it.
 - To avoid seeing it again, check **Don't Show Again**, then click **Close**.

7. Configuring the Policy as follows:

a. In the **Cluster Rules** page:

- A default template is displayed. You can:
 - Use the existing template.
 - Modify and save it.
 - Save it as a new template.
- Templates are listed under **Cluster Rule Templates** in the right panel.
- Select a template to apply it to your rule.

b. The field in the **Cluster Rules** are:

Cluster Rules - Field and Description Table

Policy Application Scope	• Cluster Wide - Cluster wide global policy. • Namespace Wide - Policy to be applied for a specific namespace or a project within a cluster.
Policy Rules	Enable or disable the following rules as needed: • Onboarding Rule - Automatically map the policy by evaluating the configured rules when new clusters or namespaces are detected. If not enabled, the policy will not be mapped automatically but still can be mapped manually in KUBE+. • Namespace Exclusion for Certificate Discovery - Skip specified namespaces during the certificate discovery process. • Off-boarding Rule - Execute defined actions when clusters are removed from KUBE+

8. Click **Next**.

9. In the **Issuance Template** page:

- Select a certificate template from the right panel.
- In the **Import Issuance Template** popup, click **Confirm**.
- (Optional) Click **+ Add CA** to add more CAs, and fill in the required fields.

10. Click **Next**.

11. (Optional) Configure Notifications as follows:

- a. On the **Notification** page, click **+ Add Notification**.
- b. In the **Configure Notification** panel, fill in the following:

Notification Settings Tab**Notification Settings - Field and Description Table**

Field	Description
Recipient	Select recipients. The options are: • User Group - select this checkbox and add user groups from the dropdown list. • User - select this checkbox and add users from the dropdown list. • Email - enter the email address with comma separated.
Delivery Method	Select delivery methods. The options are: • *Notify Via - Bydefault Email option is selected. • Notify Me - Enable this toggle button to notify you when the policy is executed.

Message Template tab

Message Template - Field and Description Table

Field	Description
Email Template	Select a email template from the dropdown list.
Email Subject	Enter the email subject. You can include variable to replace the value. To know about the variables, click Variables.
Email Content	Enter the email content for the bosy of the email. You can also use variables.

- c. Click **Add**.

12. Click **Finish**.

13. In the **Submit Policy** confirmation popup, click **Confirm**.
The cluster policy is added to the Cluster Policy inventory.

Related Information

- [Modifying Cluster Policy](#)

Modifying Cluster Policy

After you create the cluster policy, modify it to update the associated certificate group, certificate authority, and CA settings. You can also modify it to add or remove clusters and namespaces that are mapped to the policy.

Prerequisites:

- Ensure [CA integration](#) is completed.
- Ensure you configured organization PKI standards as [CA Policy](#).
- Ensure the [Group](#) is created.

To modify a cluster policy:

1. Go to **menu > KUBE+ > GROUPS & POLICIES > Cluster Policy**

On the **Cluster Policy** page, the created policies are displayed, if any.

2. Click the edit icon against the cluster policy.
3. On the **Policy Details Update Form**, modify or edit the policy details such as certificate group, certificate authority, and CA settings.

4. Under **Policy Association Details** section, click  **Add**.

5. On the **Add policy association details** blade, add the following:

- If the policy type is **CA Setting Cluster [Cluster Wide Policy]**, you can only select a cluster that is onboarded to the cluster inventory.
- If the policy type is **CA Setting [Namespace Specific Policy]**, you can select both a cluster and its associated namespaces, where the cluster is already onboarded to the inventory.
- Click **Add**.
- Close the **Add policy association details** blade.

6. Similarly, the clusters added to the policy can be modified by Edit/Delete actions.
7. Click **Update**.

Related Information

- [Deleting a Cluster](#)

Deleting a Cluster Policy

You can delete cluster policies from the inventory, if the user chooses to restrict and remove CLM operations on the designated cluster policy.

To delete a cluster policy:

1. Go to **menu > KUBE+ > GROUPS & POLICIES > Cluster Policy**.
2. Select the designated cluster policy, regardless of whether it is in a Managed or Unmanaged state.
3. Click **Delete** on the menu bar.



Note:

- You can delete a cluster policy created from the inventory if the Policy is not applied or consumed by any of the Issuer CAs created in the Issuer CA inventory.

Appendix A: Prerequisites for Enabling the Integrated Windows Gateway Mode

Useases	Required	Level	Type	Details	Purpose
Device and CA communications	User account type	User	User Account	Added to Group 1. Domain Admin	To ensure seamless WinRM communication from a remote Java process, adding the user to the Domain Admin group is necessary. This grants the required permissions

Usecases	Required	Level	Type	Details	Purpose
					for enabling communication, remote execution, preventing operational failures and maintaining functionality.
				2. Remote Management Users	Adding the user to the Remote Management Users group is essential for enabling WinRM communication, as it grants the necessary permissions for remote execution and management tasks, ensuring secure and efficient operation.
	User permission	System	Winrm Permissions	Permissions: 1. Enabling PSRemoting: Enable-PSRemoting -Force2 2. Configure WinRM service: Set-Service -Name WinRM -StartupType Automatic Start-Service -Name WinRM3 3. Allow WinRM Through Firewall : (if any)	Steps with command to enable winrm communication in windows machine

Usecases	Required	Level	Type	Details	Purpose
				Enable-NetFirewallRule -Name "WINRM-HTTP-In-TCP-PUBLIC" Enable-NetFirewallRule -Name "WINRM-HTTP-In-TCP-DOMAIN" 4. Permissions for WSMAN winrm set winrm/ config/service '@{AllowUnencrypted="true"}' winrm set winrm/ config/service/auth '@{Basic="true"}'	
	Ports	System	5985	HTTP	
		System	5986	for HTTPS communication (Not Certified Yet)	
Fetch CA - Domain execution host				Devices part of Domain controllers gets all CA's available in that domain Command to check : systeminfo findstr /C:"OS Configuration"	

Automate Certificate Lifecycle Management

- [Steps for Automating Certificate Lifecycle Management](#)
- [Secure Apps Inventory](#)
- [Trust Store Bundles Inventory](#)

Steps for Automating Certificate Lifecycle Management

Request and provision certificates to your Kubernetes secrets or local volumes within a pod or a container and use them for securing your Kubernetes ingress or gateways. The provisioned certificates can also be automatically renewed before expiry.

The following outlines the step-by-step process to fully automate certificate lifecycle management within your clusters, ensuring compliance and promoting crypto-agility through simplified PKI policies.

1. **Configure Issuer CA** - To enable certificate signing requests (CSRs) to be generated at the cluster end using the Cluster Policy defined earlier, the Issuer CA feature is used to create a Policy YAML and push it into the cluster. This Policy YAML, derived from the Cluster Policy, will be used during the CSR generation process when certificates are requested within the cluster.
2. **Enroll Certificates** - The certificate request process involves obtaining certificates signed by the specified Certificate Authority (CA), which can then be deployed in Kubernetes secrets, pods, or routes.
3. **Download Certificates** - Process for retrieving certificates from the centralized inventory and deploying them to Kubernetes secrets or pods.

Secure Apps Inventory

In KUBE+, Enroll Certificates and Download Certificates refer to the process of creating a Kubernetes resource known as "Cert" (Enroll new certs), "SecretProviderClass (Pod Certificates)", and "CertLoad" (Download existing certs) which represents an SSL/TLS certificate deployed in Secrets and Pods respectively. The Cert resource is generated by the cert-orchestrator and includes an associated certificate signing request and CertLoad resource is generated by the cert-orchestrator. The SecretProviderClass resource is consumed by the appviewx-csi-provider which also includes an associated certificate signing request. This request is then sent to the Certificate Authority (CA) for signing through the KUBE+ platform.

To go to Enroll Certificate inventory, go to **menu > KUBE+ > Cluster Security > Secure Apps**.

The Enroll Certificate inventory list includes the following information:

Enroll Certificate Inventory - Column Description Table

Column Name	Description
Certificate Name	Name of the certificate.
Common Name	The common name of the certificate. Click on the desired common name to be redirected to the certificate inventory page, which displays the certificates associated with the common name.
Cluster Name	Name of the cluster.
CA Settings Type	Type of the CA settings.
Enroll To	The endpoint to which the certificate is deployed. The options are: • Secret • Pod
Auto Renew	The status of auto-renewal for the enrolled certificates. The options are: • True • False
Created By	User ID who enrolled the certificate.
Created Source	The source of the certificate enrollment request.
Updated Time	Last updated Timestamp.

- [Enrolling a Certificate](#)
- [Downloading a Certificate](#)
- [Deleting the Certificate YAML](#)
- [Push and Revoke CERT](#)

Enrolling a Certificate

Enroll enables the DevOps teams / application owners to request a certificate for their application deployed in the desired Kubernetes cluster. The certificate which is enrolled can be deployed directly to the Kubernetes secrets or even the local volumes of the Kubernetes pods (or) containers.

Prerequisites:

- [CA Integration](#) done.
- CA Policy created.
- [Certificate Groups](#) created.
- [Cluster Policy](#) created.



Note: To enable certificate enrollment for OpenShift routes, the following command must be executed in a cluster where cert-orchestrator is installed:

```
oc create clusterrolebinding crypto-mesh --clusterrole=cluster-admin --serviceaccount=<cert-orch namespace>:crypto-mesh
```

Sample command:


```
oc create clusterrolebinding crypto-mesh --clusterrole=cluster-admin --serviceaccount=containers:crypto-mesh
```

See the following section for enrolling certificates for:

- [Legacy Cluster Policy](#)
- [Policy Central Cluster Policy](#)
- [Enrolling a Certificate for a Legacy Cluster Policy](#)
- [Enrolling a Certificate for a Policy Central Cluster Policy](#)

Enrolling a Certificate for a Legacy Cluster Policy

To enroll a certificate for a legacy policy type:

1. Go to **menu > KUBE+ > Cluster Security > Secure Apps**.
2. Click .

3. On the **Enroll Certificate** page, enter/select the field information in the General Information section for Cert resource to be created on Kubernetes cluster.

General Information Section - Field and Description Table

Field	Description
Enroll Cert To *	Select the endpoint where the cert is to be deployed. The options are: • Secret: KUBE+ enrolls certificate and stores signed certificate and key in k8s secret. • POD : KUBE+ has a CSI provider which provisions certificates in the pods local volume. • Route: KUBE+ enrolls certificate and stores signed certificate and key in OpenShift route. Additionally, the ConfigMap objects are discovered.
Format *	 Note: This field is displayed only if you select the Enroll Cert To option as Pod. The certificate file format that should be downloaded to the pod. The supported formats include PEM, PFX, P12, and JKS.
Encoding *	 Note: This field is displayed only if you select the Enroll Cert To option as Pod. The encoding type of the file content. Supported types include utf-8, hex, and base64.
Is CA Required *	 Note: This field is displayed only if you select the Enroll Cert To option as Pod. Download the trust store for the enrolled certificate. Set to False will result in the download only leaf certificates.

Field	Description
File Name	 Note: This field is displayed only if you select the Enroll Cert To option as Pod. The name of the certificate file to be created in the pod.
Cluster *	Select a cluster where the certificate to be deployed from the dropdown list.
Cluster Policy *	Select a legacy cluster policy from the drop-down list.
Policy Type *	The policy type is displayed as Legacy Policy for the selected cluster policy.
Policy Scope *	The scope of the policy is displayed.
CA Setting Name *	Select a CA setting name from the dropdown list.
Certificate Authority *	The Certificate Authority used for certificate enrollment as configured in the Cluster Policy.
Certificate Category *	The type of certificate. The options include 'Client' and 'Server'.
Namespace *	Enter the namespace.
Certificate Name *	Enter a Certificate Name for certificate storage within the K8s cluster.
Secret Name *	Enter a Secret Name for certificate storage within the K8s cluster.
Enable Auto Renewal *	Select a auto renewal option. The options are: • False (default) - Certificates will not be automatically renewed prior to their expiration. • True - Certificates can be automatically renewed before they expire.

Field	Description
CSR Validity *	The validity for the CSR in the cluster, if not approved. The default is 24h.
Overwrite valid certificates *	Options : False/True If this option is set to true, any update to the fields under <code>spec</code> in the certificate will trigger re-enrollment.
Advanced Certificate Options *	 Note: This field is displayed only if you select the Enroll Cert To option as Secret or Route. Select one of the following options: • False - Default. This option does not allow you to apply advanced certificate options. • True - This option allows advanced certificate customization options.
Certificate Deployment Mode	 Note: This field is displayed only if you select the Advanced Certificate Options option as True. Standard [i.e : certificates downloaded and deployed in <code>tls.crt</code> , <code>tls.key</code> , <code>ca.crt</code>] Certificate Chain [i.e : The server certificate (issued to the domain) is combined with the intermediate certificate(s) provided by the Certificate Authority (CA) but the root is not included] CA Bundle : [i.e : Concatenation of the server certificate, intermediate certificate(s), and root certificate in a single PEM-encoded file]

Field	Description
Deploy Trust Store	 Note: This field is displayed only if you select the Advanced Certificate Options option as True. Options : Yes/No Download the trust store for the enrolled certificate. Set to No will result in the download only leaf certificates.
Secret Delete *	 Note: This field is displayed only if you select the Advanced Certificate Options option as True. Options : No/Yes If this option is set to Yes, the associated secret will be deleted after the certificate is removed.
Custom Secret	 Note: This field is displayed only if you select the Advanced Certificate Options option as True. Options : Yes/No Certificate Enrolment in secret with custom keys for certificate, private key and ca certificates. Provide the keys to be used in each field. Key Name for Root certificate: <customname> Key Name for Intermediate certificate: <customname> Key Name for Server certificate: <customname>

4. Enter/select field information in the CSR Parameter section.

CSR Parameter Section - Field and Description Table

Field	Description
CSR Generation Endpoint *	The default CSR generation endpoint option is K8's Secret. In the scenario where private keys need to be generated in AppViewX, users can choose the CSR endpoint as 'AppViewX'.
Common Name *	Enter the common name of the cert.
Subject Alternative Name	Select a Subject Alternative Name from the dropdown list. The options are: • DNS - DNS of the cert • IP Address - IP Address of the cer
Organization	Enter the organization of the cert.
Organization Unit	Enter the organization unit of the cert.
Locality	Enter the locality of the cert.
Street	Enter the street of the cert.
State/Province	Enter the state or province of the cert.
Country	Enter the country of the cert.
Postal Code	Enter the postal code of the cert.
Email Address	Enter the email address of the cert.
<i>*-Mandatory</i>	

5. Enter/select the field information in the **Private Key Parameters** section.

Private Key Parameters Section - Field and Description Table

Field	Description
Key Type *	Select a key type of the cert from the dropdown list. The options are: • RSA • EC
Bit Length *	Select the bit length from the dropdown list. • CSR param bit lengths for RSA are 2048/4096/3072. • CSR param bit lengths for EC are 256/384/521.
*-Mandatory	

6. Click **Generate Cert YAML** to get the certificate for enrollment in the **Certificate YAML** field.

**Note:**

- To download the enrolled CERT configuration as a YAML file, click .
- To see the commands in the full screen view, click the .
- To copy the command, click .

7. Use Annotation as follows:

- When you select **Enroll Cert To** as **Route**, an option to **Generate Route Annotation** will display. Click **Generate Route Annotation** to generate the annotation with the certificate name provided.

The sample annotation will look something like this:

```

annotations:
  appviewx.com-cert-orchestrator/cert-name: co-hello-openshift.apps-crc.testing
  
```



Note: The **cert-orchestrator** will monitor the **Route** objects in the OpenShift cluster. If a route contains an annotation with the key `appviewx.com-cert-orchestrator/cert-name`, the value of this annotation will be used to identify the source certificate provider.

- b. Copy the annotation and include it in your OpenShift route configuration.

Sample route configuration:

```
kind: Route

apiVersion: route.openshift.io/v1

metadata:
  name: co-hello-openshift-edge
  namespace: test
  uid: 3a00d4ef-cb3d-4b51-9c9a-7046d462b451
  resourceVersion: '1138573'
  creationTimestamp: '2024-10-04T08:52:45Z'
  annotations:
    appviewx.com-cert-orchestrator/cert-name: co-hello-openshift.apps-crc.testing

spec:
  host: co-hello-openshift.apps-crc.testing
  subdomain: hello-openshift
  to:
    kind: Service
    name: hello-openshift
    weight: 100
  port:
    targetPort: 8080
  tls:
    termination: edge
  wildcardPolicy: None
```



Note: Make sure to update the values (such as certificate name and host) to match your environment before applying this configuration.

8. Click **Add** to add the certificate to the Enroll Certificate inventory list.
9. When you select **Enroll Cert To** as **Pod** option, then do the following steps to enroll a certificate to a pod:

- a. Apply the generated SecretProviderClass YAML to the cluster.

```

apiVersion: secrets-store.csi.x-k8s.io/v1
kind: SecretProviderClass
metadata:
  name: demo-cluster-pod-cert
  namespace: default
spec:
  parameters:
    isCARequired: 'True'
    objectEncoding: 'utf-8'
    objectFormat: 'pem'
    objects: |
      - additionalCSRParameters:
          certificateCategories:
            - 'Server'
          hashFunction: 'SHA256'
      caSettingRef:
        group: 'Default'
        kind: 'CASettingCluster'
        name: 'karthik-ui-casc-default'
        commonName: 'demo.cluster.com'
      isCA: false
      isDisableReCreate: true
      isDisableRenewal: true
      isOverwriteValidCertificate: false
      isPrivateKeyGenerationAtRemote: true
      issueWaitPeriod: '24h'
      privateKey:
        algorithm: 'RSA'
        rotationPolicy: never
        size: 2048
        secretName: 'demo-cluster-pod-secret'
  provider: appviewx

```

- b. Once the cluster status is changed to Deployed and Success, use the generated SecretProviderClass in the application pod YAML.

```

kind: Pod
apiVersion: v1
metadata:
  name: webapp-demo-cluster
spec:
  containers:
    - image: jweissig/app:0.0.1
      name: webapp
      volumeMounts:
        - name: secrets-store-inline
          #mountPath: "/mnt/secrets-store" #Path to mount the certificate data
          mountPath: "/etc/ssl/"          #Path to mount the certificate data
          readOnly: true
      volumes:
        - name: secrets-store-inline
          csi:
            driver: secrets-store.csi.k8s.io
            readOnly: true
            volumeAttributes:
              secretProviderClass: "demo-cluster-pod-cert" #name of the secretprovider

```

c. Upon pod creation, the certificate will be mounted at the specified path.

If you want a certificate and key combined together, configure the following in the cert.yaml file:

```

additionalOutputFormat:
  - KeyWithCertPEM


```

This will add additional field named **"tls.keyWithCert.pem"**, which will contain both the private key and the certificate.

Enrolling a Certificate for a Policy Central Cluster Policy

To enroll a certificate for a policy central cluster policy:

1. Go to **menu > KUBE+ > Cluster Security > Secure Apps**.

2. Click . The button is a purple rectangle with a white plus sign and the word "Enroll" in white text.

3. On the **Enroll Certificate** page, enter/select the field information in the General Information section for Cert resource to be created on Kubernetes cluster.

General Information Section - Field and Description Table

Field	Description
Enroll Cert To *	Select the endpoint where the cert is to be deployed. The options are: • Secret: KUBE+ enrolls certificate and stores signed certificate and key in k8s secret. • POD : KUBE+ has a CSI provider which provisions certificates in the pods local volume. • Route: KUBE+ enrolls certificate and stores signed certificate and key in OpenShift route. Additionally, the ConfigMap objects are discovered.
Format *	 Note: This field is displayed only if you select the Enroll Cert To option as Pod. The certificate file format that should be downloaded to the pod. The supported formats include PEM, PFX, P12, and JKS.
Encoding *	 Note: This field is displayed only if you select the Enroll Cert To option as Pod. The encoding type of the file content. Supported types include utf-8, hex, and base64.
Is CA Required *	 Note: This field is displayed only if you select the Enroll Cert To option as Pod. Download the trust store for the enrolled certificate. Set to False will result in the download only leaf certificates.

Field	Description
File Name	 Note: This field is displayed only if you select the Enroll Cert To option as Pod. The name of the certificate file to be created in the pod.
Cluster *	Select a cluster where the certificate to be deployed from the dropdown list.
Cluster Policy *	Select a policy central cluster policy from the drop-down list.
Policy Type *	The policy type is displayed as Policy Central for the selected cluster policy.
Policy Scope *	The scope of the policy is displayed.
Assign Group *	Select a group from the drop-down list. This  Note: This list displays groups based on the group selected for the CA policy.
Namespaces *	Enter the namespaces.
Cluster Policy Template *	Select a Certificate Authority (CA) template for the cluster policy.
Certificate Authority *	The CA is displayed based on the selected Cluster Policy Template.
Certificate Category *	The type of certificate. The options include 'Client' and 'Server'.
Certificate Name *	Enter a Certificate Name for certificate storage within the K8s cluster.
Secret Name *	Enter a Secret Name for certificate storage within the K8s cluster.

Field	Description
Enable Auto Renewal *	Select a auto renewal option. The options are: • False (default) - Certificates will not be automatically renewed prior to their expiration. • True - Certificates can be automatically renewed before they expire.
CSR Validity *	The validity for the CSR in the cluster, if not approved. The default is 24h.
Overwrite valid certificates *	Options : False/True If this option is set to true, any update to the fields under <code>spec</code> in the certificate will trigger re-enrollment.
Advanced Certificate Options *	 Note: This field is displayed only if you select the Enroll Cert To option as Secret. Select one of the following options: • False - Default. This option does not allow you to apply advanced certificate options. • True - This option allows advanced certificate customization options.
Certificate Deployment Mode	 Note: This field is displayed only if you select the Advanced Certificate Options option as True. Standard [i.e : certificates downloaded and deployed in <code>tls.crt</code>, <code>tls.key</code>, <code>ca.crt</code>] Certificate Chain [i.e : The server certificate (issued to the domain) is combined with the intermediate certificate(s) provided by the

Field	Description
	Certificate Authority (CA) but the root is not included] CA Bundle : [i.e : Concatenation of the server certificate, intermediate certificate(s), and root certificate in a single PEM-encoded file]
Secret Delete *	 Note: This field is displayed only if you select the Advanced Certificate Options option as True. Options : No/Yes If this option is set to Yes, the associated secret will be deleted after the certificate is removed.
Custom Secret	Options : Yes/No Certificate Enrolment in secret with custom keys for certificate, private key and ca certificates. Provide the keys to be used in each field. Key Name for Server certificate: <customname> Key Name for Private Key: <customname> Key Name for Server certificate: <customname>
Deploy Trust Store	 Note: This field is displayed only if you select the Enroll Cert To option as Route. Options : Yes/No Download the trust store for the enrolled certificate. Set to No will result in the download only leaf certificates.

4. Enter/select field information in the CSR Parameter section.

CSR Parameter Section - Field and Description Table

Field	Description
CSR Generation Source *	The default CSR generation endpoint option is K8's Secret. In the scenario where private keys need to be generated in AppViewX, users can choose the CSR endpoint as 'AppViewX'.
Common Name *	Enter the common name of the cert.
Subject Alternative Name	Select a Subject Alternative Name from the dropdown list. The options are: • DNS - DNS of the cert • IP Address - IP Address of the cer
Organization	Enter the organization of the cert.
Organization Unit	Enter the organization unit of the cert.
Locality	Enter the locality of the cert.
Street Address	Enter the street of the cert.
State	Enter the state or province of the cert.
Country	Enter the country of the cert.
Postal Code	Enter the postal code of the cert.
mail Address	Enter the email address of the cert.
<i>*-Mandatory</i>	

5. Enter/select the field information in the **Private Key Parameters** section.

Private Key Parameters Section - Field and Description Table

Field	Description
Key Type *	Select a key type of the cert from the dropdown list. The options are: • RSA • EC
Bit Length *	Select the bit length from the dropdown list. • CSR param bit lengths for RSA are 2048/4096/3072. • CSR param bit lengths for EC are 256/384/521.
Hash Function *	Select a hash function from the drop-down list.
<i>*-Mandatory</i>	

6. Click **Generate Cert YAML** to get the certificate for enrollment in the **Certificate YAML** field.

**Note:**

- To download the enrolled CERT configuration as a YAML file, click .
- To see the commands in the full screen view, click the .
- To copy the command, click .

7. Use Annotation as follows:

- When you select **Enroll Cert To** as **Route**, an option to **Generate Route Annotation** will display. Click **Generate Route Annotation** to generate the annotation with the certificate name provided.

The sample annotation will look something like this:

```
annotations:
  appviewx.com-cert-orchestrator/cert-name: co-hello-openshift.apps-crc.testing
```



Note: The **cert-orchestrator** will monitor the **Route** objects in the OpenShift cluster. If a route contains an annotation with the key `appviewx.com-cert-orchestrator/cert-name`, the value of this annotation will be used to identify the source certificate provider.

- b. Copy the annotation and include it in your OpenShift route configuration.

Sample route configuration:

```
kind: Route

apiVersion: route.openshift.io/v1

metadata:
  name: co-hello-openshift-edge
  namespace: test
  uid: 3a00d4ef-cb3d-4b51-9c9a-7046d462b451
  resourceVersion: '1138573'
  creationTimestamp: '2024-10-04T08:52:45Z'
  annotations:
    appviewx.com-cert-orchestrator/cert-name: co-hello-openshift.apps-crc.testing

spec:
  host: co-hello-openshift.apps-crc.testing
  subdomain: hello-openshift
  to:
    kind: Service
    name: hello-openshift
    weight: 100
  port:
    targetPort: 8080
  tls:
    termination: edge
  wildcardPolicy: None
```



Note: Make sure to update the values (such as certificate name and host) to match your environment before applying this configuration.

8. Click **Add** to add the certificate to the Enroll Certificate inventory list.
9. When you select **Enroll Cert To** as **Pod** option, then do the following steps to enroll a certificate to a pod:

- a. Apply the generated SecretProviderClass YAML to the cluster.

```

apiVersion: secrets-store.csi.x-k8s.io/v1
kind: SecretProviderClass
metadata:
  name: demo-cluster-pod-cert
  namespace: default
spec:
  parameters:
    isCARequired: 'True'
    objectEncoding: 'utf-8'
    objectFormat: 'pem'
    objects: |
      - additionalCSRParameters:
          certificateCategories:
            - 'Server'
          hashFunction: 'SHA256'
      caSettingRef:
        group: 'Default'
        kind: 'CASettingCluster'
        name: 'karthik-ui-casc-default'
      commonName: 'demo.cluster.com'
      isCA: false
      isDisableReCreate: true
      isDisableRenewal: true
      isOverwriteValidCertificate: false
      isPrivateKeyGenerationAtRemote: true
      issueWaitPeriod: '24h'
      privateKey:
        algorithm: 'RSA'
        rotationPolicy: never
        size: 2048
      secretName: 'demo-cluster-pod-secret'
  provider: appviewx

```

- b. Once the cluster status is changed to Deployed and Success, use the generated SecretProviderClass in the application pod YAML.


```

kind: Pod

apiVersion: v1

metadata:
  name: webapp-demo-cluster

spec:
  containers:
    - image: jweissig/app:0.0.1

      name: webapp

      volumeMounts:
        - name: secrets-store-inline

          #mountPath: "/mnt/secrets-store" #Path to mount the certificate data

          mountPath: "/etc/ssl/"          #Path to mount the certificate data

          readOnly: true

      volumes:
        - name: secrets-store-inline

          csi:

            driver: secrets-store.csi.k8s.io

            readOnly: true

            volumeAttributes:

              secretProviderClass: "demo-cluster-pod-cert" #name of the secretprovider

```

c. Upon pod creation, the certificate will be mounted at the specified path.

If you want a certificate and key combined together, configure the following in the cert.yaml file:

```

additionalOutputFormat:
  - KeyWithCertPEM

```

This will add additional field named **"tls.keyWithCert.pem"**, which will contain both the private key and the certificate.

Downloading a Certificate

Download enables the DevOps teams and application owners to download a retrieve certificate from certificate inventory for their application deployed in the desired Kubernetes cluster. The certificate which is downloaded can be deployed directly to the Kubernetes secrets or even the local volumes of the Kubernetes pods or containers.

Prerequisites

- A valid certificate and key available in the certificate inventory of KUBE+.

To download a certificate:

1. Go to **menu > KUBE+ > Cluster Security > Secure Apps**.
2. Click **Download**.
3. On the **Download Certificate** page, enter/select the field information in the General Information section for CertLoad resource to be created on Kubernetes cluster.

Download Certificate - Field and Description Table

Field	Description
Certificate Type	The type of certificate to be downloaded from the inventory. The type can be either 'Server' or 'Client'.
Common Name	Common name of the certificate.
Look for certificates in Inventory	The 'Search' button allows you to retrieve certificates based on the provided common name.
Select Certificate	Select the certificate from the search results.
Serial Number	Select the associated serial number of the certificate
Certificate Name	Enter a Certificate Name for certificate storage within the K8s cluster.
Download To	Select the endpoint where the cert is to be deployed. The options are: Secret: KUBE+ enrolls the certificate and stores signed certificate and key in k8s secret. POD: KUBE+ has a CSI provider, which provisions certificates in the pod's local volume.

Field	Description
Namespace	The name of the namespace within the Kubernetes cluster where the secret will be created.
Secret Name	Enter a Secret Name for storing the certificate within the K8s cluster.
Format	The certificate file format that should be downloaded to the pod. The supported formats include PEM, PFX, P12, and JKS.
Encoding	The encoding type of the file content. Supported types include utf-8, hex, and base64.
Password	If the certificate download is password-protected, provide the password.
Alias Name	The alias name in the keystore for the certificate file format, when it is in JKS format.
Alias Password	The password for the alias.
Is CA Required	Download the trust store for the enrolled certificate. Set to "False" will result in the download only leaf certificates.
File Name	The name of the certificate file to be created in the pod.

4. Click **Generate YAML** to get the certificate to be downloaded in the **Download YAML** field.
5. Copy and deploy the YAML in the cluster to retrieve the certificate from the Inventory. After the deployment is finished, click **Cancel**.
6. Alternatively, the YAML configuration can also be downloaded as a YAML file.

Deleting the Certificate YAML

You can delete certificates from the inventory, if the user chooses to restrict and remove CLM operations on the designated certificate.

To delete a certificate:

1. Go to **menu > KUBE+ > CLUSTER SECURITY > Secure Apps**.
2. Select the designated certificate, regardless of whether it is in a Managed or Unmanaged state.
3. Click **Delete** on the menu bar.

**Note:**

- You can delete the YAML configurations generated for enrolling/downloading a certificate to the Kubernetes secret or Pod from the Secure Apps Inventory.
- Deleting the Certificate Enroll configuration from the inventory automatically deletes the deployed certificate on a secret. Users are recommended to manually cross check the deleted certificate from the respective secret or pod.
- In addition to the above, users are encouraged to cross check the deleted Kubernetes resources created, such as "Cert" for Enroll and "CertLoad" for Download certificates. This step ensures a thorough cleanup of certificates deployed in the cluster. The commands to manually delete are:
 - For certificates enrolled via KUBE+: `kubectl delete Cert <cert-name> -n <namespace-name>`.
 - For certificates downloaded via KUBE+: `kubectl delete CertLoad <cert-name> -n <namespace-name>`.

Push and Revoke CERT

KUBE+ enables a self-service feature of managing KUBE+ related kubernetes resources in the clusters directly from the KUBE+ control plane.

Cluster administrators or DevOps team can Push the **Cert** and **CertLoad** resources used for generating certificate signing requests directly from the inventory into the respective cluster, this enables to reduce the efforts of manually downloading the Resources as YAML, copying it to the cluster and deploying it.

Similarly, the cluster administrators or DevOps team can also Revoke (Delete) the **Cert** and **CertLoad** Resources deployed in the specific cluster instead of executing the delete commands manually in the cluster.

- [Pushing the Cert CRD](#)
- [Revoking the Cert CRD](#)

Pushing the Cert CRD

To push the Cert or CertLoad Resources created,

1. Go to **menu > KUBE+ > CLUSTER SECURITY > Secure Apps**.
2. Select a Cert or CertLoad from the inventory that is in a deployed state.
3. Click **PUSH**.
4. Type your comments in the **Comments** field.
5. Click **Push**.

Revoking the Cert CRD

To revoke the Cert or CertLoad Resources created:

1. Go to **menu > KUBE+ > CLUSTER SECURITY > Secure Apps**.
2. Select a Cert or CertLoad from the inventory that is in a deployed state.
3. Click **Revoke**.
4. On **Certificate Revoke** popup window, under **Trigger Revoke Certificate**, select one of the following options:
 - **Yes** (default) - Revokes the certificate in the certificate inventory and delete it in the cluster.
 - **No** - Deletes the certificate only in the cluster.
5. Type your comments in the **Comments** field.
6. Click **Revoke**.

Trust Store Bundles Inventory

TrustStore Bundles Inventory - Column Description Table

Column Name	Description
Trust Store Name	Name of the trust store template.
Source Count	Number of root or intermediate certificates configured.
Target Count	Number of targets where the trust store is deployed. The targets are Secrets and ConfigMap.
Cluster Count	Total number of clusters associated with this trust store bundle.
Manage and Deploy	Allows to manage the bundles and deploy.

TrustStore Bundles Inventory - Column Description Table (continued)

Column Name	Description
Target Clean	Flag specifies whether the targets required to be cleaned during the TrustStoreCluster is deleted.
Created By	Username or system that created the trust store bundle.
Last Updated	Timestamp of the most recent update to the trust store bundle.

- [Create Trust Store Bundle](#)
- [Delete a Trust Store \(Template\)](#)
- [Delete A Trust Store \(Mapping\)](#)
- [Push A Trust Store \(Mapping\)](#)
- [Revoke A Trust Store \(Mapping\)](#)

Create Trust Store Bundle

1. Go to **Menu > KUBE+ > CLUSTER SECURITY > Trust Store Bundles**.
2. In the **Trust Store Bundle** page, click **+Create Trust Store Bundle**.
3. In the **General Configuration** section, enter the name for the trust store bundle.
4. In the **Certificate Authorities** section, click **+Add** to configure the certificate authority.
5. In the **Add Certificate Authority Configuration** window, fill in the following details to configure the certificate authority for the certificate:

Add Certificate Authority Configuration - Field and Description Table

Field	Description
Category*	Select a trust store category. The options are: • Root CA • Intermediate CA
Certificate Authority Name*	Select a certificateauthority for the selected truststore category.

Field	Description
	 Note: For self signed certificates, select None.
Common Name*	Select a common name of the certificate. If the no name has been provided for the certificate, select None.
Serial Numbers*	Select serial numbers from the list. Multiple numbers can be selected. To select all the serial numbers, select All.
Intermediate Chain Required*	 Note: This option is applicable when Category = Intermediate CA. Complete chain is required or only the root certificate is required. The options are: • Yes • No
<i>*-Mandatory Fields</i>	

6. Click Add.
7. To add more sources, repeat the same steps.
8. In the Targets section, Map the targets as follows:
 - a. Target Clean: Select Yes or No whether to cleanup the configured targets when the Trust Store Bundle is deleted.
 - b. Under Target Configuration, click +Add.
 - c. In the Add Target Configuration window, fill in the following details:

Add Target Configuration - Field and Description Table

Field	Description
Type*	Enter a target type. The options are: • Secret • ConfigMap
Name*	Enter the name of the configured target in the cluster.
Namespaces*	Enter the namespaces. You can add the multiple namespaces. The namespaces must exact match or wildcard regex ends with .* (Example: test.*)
Key Name*	Name of the key in the configured target.
*-Mandatory	

d. Click **Add**.

e. To add more targets, repeat the same steps.

9. Click **Generate YAML**.

10. Click **Save Configuration**.

The trust store bundle is added to the Trust Store Bundles inventory

Delete a Trust Store (Template)

1. Go to **Menu > KUBE+ > CLUSTER SECURITY > Trust Store Bundles**.

2. In the **Trust Store Bundle** page, select trust stores.



Note: Multiple trust store names are allowed to select.

3. Click **Delete**.

4. In the **Trust Store Template Delete** popup window, add comments and then click **Delete**.



Note: TrustStore Template should not have any mapping to delete the same.

Delete A Trust Store (Mapping)

You can delete a truststore from the Trust Store mapping inventory only if the trust store is in Deleted state.

1. Go to **Menu > KUBE+ > CLUSTER SECURITY > Trust Store Bundles**.
 2. In the **Trust Store Bundles** page, under **Manage and Deploy** column, click  of a trust store bundle.
 3. In the **Trust Store Inventory > Trust Store Manage And Deploy** page, select a trust store mapping.
 4. Click **Delete**.
 5. In the **Trust Store Delete** popup window, enter the comment and then click **Delete**.
- The trust store mapping is deleted from the mapping inventory.

Push A Trust Store (Mapping)

1. Go to **Menu > KUBE+ > CLUSTER SECURITY > Trust Store Bundles**.
2. In the **Trust Store Bundle** page, under **Manage and Deploy** column, click  of a trust store bundle.
3. In the **Trust Store Inventory > Trust Store Manage And Deploy** page, select a trust store mapping.
4. Click **Push**.
5. In the **Trust Store Push** popup window, enter the comment and then click **Push**.



Note: After a trust store bundle is pushed successfully to the cluster, any subsequent updates to the bundle are automatically pushed to all associated clusters.

Once the trust store mapping is pushed the status will be updated to Deployed Success.

Revoke A Trust Store (Mapping)

1. Go to **Menu > KUBE+ > CLUSTER SECURITY > Trust Store Bundles**.
2. In the **Trust Store Bundles** page, under **Manage and Deploy** column, click  of a trust store bundle.
3. In the **Trust Store Inventory > Trust Store Manage And Deploy** page, select a trust store mapping.

4. Click **Revoke**.

5. In the **Trust Store Revoke** popup window, enter the comment and then click **Revoke**.

The trust store mapping is Deleted from the remote cluster and the state will be changed to Deleted in the inventory.

Secure Service Mesh with mTLS authentication

KUBE+ enables the PKI and InfoSec team to move towards Zero Trust Container Security by enabling scalable mTLS certificate issuance for authentication between microservices in Service Mesh Integrations.

- [Why Zero Trust is Critical?](#)
- [AppViewX Integration with Istio Service Mesh](#)
- [Enabling AppViewX Signer](#)

Why Zero Trust is Critical?

Zero Trust helps organizations achieve compliance with industry and government regulations such as HIPAA, GDPR, and PCI-DSS. It ensures that access to sensitive data is strictly controlled and monitored, and that security policies are consistently enforced across the organization.

AppViewX Integration with Istio Service Mesh


Istio is a popular service mesh solution that provides traffic management, security, and observability for microservices-based applications. Integrating Zero Trust with Istio provides an additional layer of security for microservices-based applications. By enforcing access controls, Istio ensures that only authorized traffic is allowed between microservices.

- [mTLS with Istio Service Mesh](#)

mTLS with Istio Service Mesh

Istio can provide mutual TLS (Transport Layer Security) authentication, which ensures that both the client and server are authenticated before communication takes place. This is important for preventing unauthorized access, man-in-the-middle attacks, and data breaches. Istio uses the Envoy proxy to handle all network traffic, which allows it to manage mTLS encryption and decryption for each service. Istio

also provides a certificate authority (CA) that can issue certificates for each service, allowing them to authenticate each other.

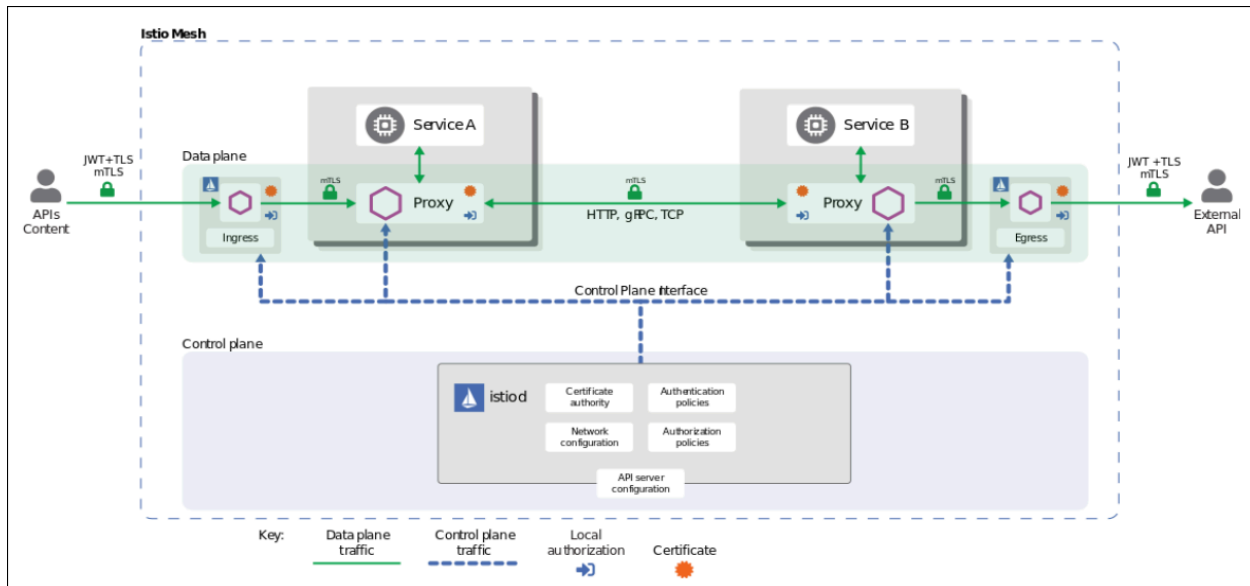

• Certificate Issuance & Management

Certificate Issuance & Management

Istio's Certificate Authority (CA) is not compliant with industry standards, which require CAs to follow strict procedures for certificate issuance and management. The root certificate and private key of the Istio Certificate Authority (CA) is stored within the cluster which can be a potential security risk and this can lead to vulnerabilities in certificate management.


To eliminate the above there is a need to ensure the certificates in the control and data plane are rooted in the enterprise chain of trust but the real-world challenge with certificate management and Istio is how to integrate with existing enterprise PKI solutions.

Enabling AppViewX Signer


AppViewX Signer, the sub component of cert-orchestrator deployed in the Kubernetes cluster here solves the real-world challenge of Istio by signing the workload certificates with a trusted CA and installing the trust anchor within the cluster in auto enrolled fashion.

2 Steps to Enable the Zero Trust Security for Containers Using mTLS Certificates

1. Enforce PKI policies to ensure the use of compliant CAs and strong crypto-standards in your service mesh configuration.



2. Enable External CA signing mode for your Service Mesh configuration to sign workloads with mTLS certificates from your Enterprise PKI.



Steps to Enable a Signer for mTLS Certificate Issuance

To enable Signer for mTLS certificate issuance for your cluster, follow these below steps.

1. **Onboard Cluster** - Deploy / enable AppViewX Signer as a part of the KUBE+ component (cert-orchestrator).
2. **Policy Enforcement** - Define and enforce CA and Cluster Policy
3. **Onboard Mesh** - Configure CSR signing mode and the Certificate Authority to be used in Service Mesh.
4. **Enable External CA Mode** - Configure Service Mesh to External CA mode for CSR signing.

- [Onboard Cluster](#)
- [Policy Enforcement for Secure ServiceMesh](#)

Onboard Cluster

To deploy and enable signer component the KUBE+ component cert-orchestrator should be deployed in your Kubernetes cluster where the Service Mesh is enabled.

- [New Cluster](#)
- [Existing Cluster](#)

New Cluster

If you are deploying the cert-orchestrator for the first time in your cluster refer [Onboarding a Cluster](#) to obtain the deployment configuration for deploying cert-orchestrator.

**Note:**

While generating the deployment configuration select the Feature gate **Enable mTLS Certificates for Service Mesh** which enables AppViewX Signer as a part of the deployment.

Existing Cluster

For an already onboarded cluster in KUBE+ the signer component can be enabled via modifying the deployment configuration and executing the updated installation command at your cluster.

Refer to Modifying Feature Gates of Cluster for the steps on how to add (or) delete feature gates to an existing deployment.



Note: While generating the modifying the deployment configuration select the Feature gate **Enable mTLS Certificates for Service Mesh** which enables AppViewX Signer as a part of the deployment.

Policy Enforcement for Secure ServiceMesh

To enable mTLS certificate issuance for application workloads from your Enterprise PKI, the PKI policies should be defined and enforced for your Service Mesh deployment.

The process for defining and enforcing the policy definition for your service mesh deployment is as follows.

1. **CA Integration** - Integrate AppViewX KUBE+ with your Internal CA for signing the certificates for your service mesh workloads.
2. **CA Policy** - Define CA Policy to enforce your organization crypto standards and map them to Certificate Groups (to categorize certificates based on business units).
3. **Enforce Cluster Policy** - Enforce dedicated CA Policy / PKI policy to one more cluster to promote secure and compliant certificate management practices.

- [CA Integration](#)
- [CA Policy](#)
- [Cluster Policy](#)

CA Integration

Service Mesh can be integrated with your Enterprise Internal PKI only for signing application workloads with mTLS certificates.

AppViewX supports integrating with EJBCA and Microsoft CA for signing the mTLS service mesh workloads. Refer [CA Integration](#) for the steps on how to configure AppViewX KUBE+ with the respective Certificate Authority.

CA Policy

Configure certificate issuance parameters to enforce strong crypto standards for your mTLS workloads. Refer [CA Policy](#) for the steps on how to configure CA policy and [Certificate Group](#) for associate policies to certificate groups.

Cluster Policy

Configure Cluster Policy to enforce a dedicated CA/PKI policy for the service mesh external CA integration. Refer [Create Policy](#) for the steps on how to configure the Cluster Policy.




Note: For Service Mesh External CA signing the policy type must be set to **CA Setting Cluster** and the certificate authorities supported are EJBCA and Microsoft CA.

Mesh Inventory

Mesh Inventory displays a list of service mesh onboarded for a cluster. On Mesh Inventory page, you can:

- refresh the list, click the  (refresh) icon.

- go to the pages, click the  (navigation) icon.

The mesh inventory list includes the following information:

Mesh Inventory - Column and Description Table

Mesh Name	Description
Name	Unique name to identify the mesh configuration for the designated cluster.
Cluster Name	Name of the Cluster for which the service mesh requires external CA signing.
CA Mode	Issuer's CA mode.
Vendor	The vendor name of the service mesh.
Certificate Authority	Certificate Authority to verify the identities of requesting certificates and links them to cryptographic keys by issuing digital certificates.
Created By	Refers to the user who created the mesh.

- [Onboarding a Mesh](#)
- [Deleting a Mesh](#)
- [Significance of Issuer CA Mode](#)

Onboarding a Mesh

To enable External CA signing for the Service Mesh deployed in your cluster, the Cert-orchestrator running with the Signer component needs to be enabled with a Certificate Authority Setting (CA Setting), a Kubernetes resource that represents the configuration of certificate authorities (CAs) responsible for generating signed certificates through certificate signing requests.

Prerequisites:

- [CA Integration](#) done.
- CA Policy created.
- [Certificate Groups](#) created.
- [Cluster Policy](#) created.

To onboard a mesh:

1. Go to **menu > KUBE+ > Inventory > Mesh Inventory**.
2. Click **Onboard Mesh** on the menu bar.
3. On the **Onboard Mesh** page, enter/select the field information for the **General Information** and **Mesh Certificate Authority** sections.

General Information - Field and Description Table

Field	Description
General Information	
Name	Enter a unique name that can be used to identify the mesh configuration associated with the specified cluster.
Cluster	Select a cluster from the dropdown list in which the service mesh needs to be configured with an external CA for signing.
Vendor	Select a service mesh vendor from the dropdown list.
Mesh Certificate Authority	
Issuer CA mode	Select a radio button of Issuer CA mode. The options are: • via AppViewX - This option allows to send the workload certificate signing requests directly to AppViewX and signed by the configured CA Setting (Certificate Authority). The supported CA is EJBCA. • Air-Gapped - This option allows to sign the workload certificate signing requests by an Intermediate/SUB CA where the signing happens within the Kubernetes cluster. The Supported CAs are EJBCA and Microsoft CA.
Select Policy	Select the Cluster Policy from the dropdown list, which derives the associated CA for external CA signing.

Field	Description
Certification Authority	This field is not applicable, if you choose via AppViewX for Issuer CA mode. If you select Issuer CA mode as Air-Gapped, then enter/select the necessary details.
Ca Account	The account of the CA.
Common Name	Common name of the certificate.
Organization	Enter the name of the organization.
Organization unit	Enter the name of the organization unit.
Locality	Enter the locality of the certificate.
State	Enter the state of the certificate.
Country	Enter the country of the certificate.
Email Address	Enter the email address of the certificate.
Private Key Parameters	
Key Type	Select a key type of the certificate from the dropdown list. The values are: • RSA • ECDSA
Bit Length	Select a bit length for RSA or ECDSA. The values for RSA are: • 2048 • 4096 • 3072 The values for ECDSA are: • 256 • 384 • 521

4. Click **Generate YAML** to get the commands in the Issuer CA YAML field.

**Note:**

- To see the commands in the full screen view, click the .
- To copy the command, click .

5. Click **Add** to add the mesh to the Mesh Inventory list.

Deleting a Mesh

You can delete mesh from the inventory, if the user chooses to restrict and remove CLM operations on the designated mesh.

To delete a mesh:

1. Go to **menu > KUBE+ > Inventory > Mesh Inventory**.
2. Select the designated mesh, regardless of whether it is in a Managed or Unmanaged state.
3. Click **Delete** on the menu bar.

**Note:**

- A mesh can be removed from the inventory after deleting its associated configurations, including Cluster Policy, Issuer CA, and Certificates enrolled for the cluster, have been removed.
- Deleting mesh from the inventory will not remove the in-cluster KUBE+ components. Users are required to follow the [Uninstall and Clean Up](#) steps within the mesh to complete the removal process.

Significance of Issuer CA Mode

Issuer CA mode for External CA signing plays a vital role in optimizing the speed of certificate issuance to your application workloads running as a part of the service mesh infrastructure.

AppViewX KUBE+ supports multiple modes of Issuer CA for mTLS certificate issuance.

- **Issuer Mode via AppViewX** : In this mode of issuing a mTLS certificate for a workload, the CSR requests are sent to AppViewX via API from the Cert-orchestrator (appviewx signer) deployed in your Kubernetes cluster to the cluster (or) environment where AppViewX is deployed.

Example : Assume an on premises k8s cluster where your workloads are running and the CSR requests are sent to the AppViewX environment provided as a SaaS service to your enterprise. In this case the network hops and delays for the CSR request to land to AppViewX and then signed by CA will not be optimal.

Also, the CSR generated by service mesh (Istio in this case) is valid for 10 seconds only for a workload and the entire process of signing the certificate by CA via AppViewX should be completed within this time frame.

AppViewX recommends to use Issuer mode as AppViewX only when the clusters running workload and AppViewX environment are nearer to each other.

- **Issuer Mode via Air-Gapped** : In this mode of issuing a mTLS certificate for a workload, the AppViewX signer component running as a part of Cert-orchestrator generates a SUB CA / Issuing CA and the certificate and key used for signing the workloads are kept in the memory of the signer component itself for faster mTLS certificate issuance.

The signer component also keeps the signing certificate and the private key encrypted in the k8s secret for reusing it when the cert-orchestrator pods or clusters are restarted.

AppViewX recommends using Issuer mode as Air-Gapped when your AppViewX subscription is a SaaS service and when the clusters running workload and AppViewX environment are not at the nearest proximity.

Enable External Signing

- [Overview](#)
- [Creating a Signer Profile](#)

Overview

Configuring the External CA configuration settings which includes Certificate Authority Settings and the Issuer CA mode, the AppViewX signer needs to be plugged in to the service mesh configuration to sign certificate from External CA

Prerequisites:

- [Service Mesh onboarded](#) in the Mesh Inventory.

Creating a Signer Profile

In the context of Service Mesh, the term "Signer" refers to Kubernetes resources that are responsible for configuring and enabling the external CA signing mode. These resources facilitate the provision of signed certificates to workloads within the Service Mesh.

To enable an external CA signing mode in service mesh:

1. Go to **menu > KUBE+ > Cluster Security > Secure Service Mesh**.
2. Click .
3. On the **Create Signer** page, enter/select the field information.

Signer Creation - Field and Description Table

Field	Description
Name	Enter a unique name for the signer.
Mesh Name	Select a service mesh configuration associated to the cluster onboarded in earlier.
CA Mode	Select a designated issuance mode for the associated Mesh Certificate Authority.
Profile Name	Enter a unique profile name. For example, <domain>/istio.
External Secret Name	Enter the name of the secret where the trust store certificate should be synchronized.
External Secret Namespace	Enter the namespace of the secret.
Duration	Enter the duration in the hours.

4. Click **Generate YAML** to get the commands in the **Signer YAML** field.

**Note:**

- To see the commands in the full screen view, click the .
- To copy the command, click .

5. Click **Add** to add the signer to the Signer inventory list.

Integrating Istio with Custom CA

- [About Integrating Istio with Custom CA](#)

About Integrating Istio with Custom CA

AppViewX signer deployed in your cluster is now ready to sign all your service mesh application workload certificates from External Certificate Authority.

The Istio Service Mesh deployed in your cluster now needs to be reconfigured to enable Custom CA integration for provisioning workload certificates from External CA. Istio enables Custom CA integration using Kubernetes CSR API.

The root certificate for Custom CA in our case the Trust Certificate from EJBCA / Microsoft CA is loaded into the external ca secret configured in [Signer Profile](#) step. Refer to [Custom CA](#) integration steps in the Istio documentation to use the external CA secret.



Note: Change the Istio version accordingly in the URL to refer to the respective version of Istio deployed in your cluster.

Alerts and Logs

- [Expiry Alerts](#)
- [Logs](#)

- [Viewing Details of a Log](#)
- [Filtering the Logs](#)

Expiry Alerts

Digital certificates or clusters are issued with a validity period predefined by the certificate authorities. When a certificate or cluster outgrows this validity period, it is no longer trusted and the services consuming the certificate or cluster are considered broken.

AppViewX lets you create certificate or cluster expiry alerts, which are proactive notifications to customers to renew the certificates or clusters that are due for expiry.

The alerts are primarily created based on the period of certificate or cluster expiry (certificates or clusters expiring on a specific date, certificates or clusters expiring after x number of days, and so on). The emails also include a certificate renewal link, thus simplifying the CLM process.

The following sections list the prerequisites for configuring the expiry alerts and the configuration steps.

- [Configuring a Certificate Expiry Alert](#)

Configuring a Certificate Expiry Alert

Prerequisites:

Before configuring certificate expiry alerts over emails, ensure that permissions to create and modify the expiry alerts are assigned to the required role(s). To do this, follow the instructions given [here](#) and enable Expiry Alerts under Authorized Functions > KUBE+.

To configure a certificate expiry alert:

1. Go to **Menu > KUBE+ > ALERTS & LOGS > Expiry Alerts**.
The expiry alerts inventory is displayed.
2. To create a new email expiry alert, click **+ Create**.
The **ExpiryAlert > Expiry Alert Add** page is displayed.



Note: This page has a list of best practices you are advised to follow when creating a new expiry alert.

3. For the new alert, enter a unique **Alert Name** (mandatory) and a description (optional) with additional details about the alert.

4. In the **Alert Configuration** section, click **+ Add**.
The **Add Configuration** pane is displayed.
5. Select the **Filter By** for which you want to configure the expiry alert.
 - a. **Cluster**
 - b. **End Certificate**
 - c. **CA Certificate**
6. For clusters, enter/select the **Filter Configuration** details.

Filter Configuration Section - Field and Description Table

Field	Description
Cluster Name*	 Note: This field is displayed only when Filter By = Cluster or CA Certificate. Select the clusters from the drop-down list for which you want to configure alerts.
Namespace*	 Note: This field is displayed only when Filter By = Cluster or CA Certificate. Select the corresponding namespace of the selected clusters from the drop-down list for which you want to configure alerts.
Common Name*	 Note: This field is displayed only when Filter By = CA Certificate. Select the common name of the CA certificate.
Certificate Expiry Period*	To filter clusters based on their expiry: • Range in days: Select this option to send an expiry alert email for clusters that will expire in the range of number days specified. For example, to set an alert for clusters that will expire between 10 to 40 days from today, enter

Field	Description
	10 in the field before to and enter 40 in the field after to. • On specified days: Select this option to send an expiry alert email for clusters that will expire after x number of days from today. For example, to send an alert for clusters expiring on the 50th day days from today, enter 50. • Range in dates: Select this option to send an expiry alert for all clusters expiring in a specific duration. Use the calendar widget to select the Start date and End date of this duration.
Additional Filters	 Note: This field is not displayed when Filter By = CA Certificate. To add a filter in addition to the cluster expiry period: - Select the required filter from the Select option dropdown list. - Enter/select the corresponding value in the Type to enter value field. - Click Add. - The selected filter option and its value are displayed.
Notification Method*	 Note: This field is not displayed when Filter By = CA Certificate. To send an expiry alert over email or Slack message, select either Email or Slack.

Field	Description
Notification Format*	 Note: This field is displayed only when Notification Method = Email. (Instead of emails for individual clusters, you will now receive a notification with a bulk of certificates in your chosen format.) Select the notification format to be sent via email, either as an attachment or in the email body using the table format. • Attachment: A CSV file with details of all clusters due to expire will be attached to the alert email. • Email Body: A table with details of all clusters due to expire will be included in the body of the alert email.
Ignore renewed certificate	When this field is enabled, results returned after the alert is triggered will not include clusters that have already been renewed, even though they match the filter criteria.
* - Mandatory	

7. Enter/select the **Email Configuration** details.

Email Configuration Section - Field and Description Table

Field	Description
To*	
Recipient(s)	Enter the recipient(s) email address. You can enter a maximum of 20 email addresses, separated by a comma.

Field	Description
Certificate Parameter(s)	To add more recipients for the alert email, you can retrieve email addresses from the following certificate parameters: • Subject Email • SAN (rfc822) • Certificate Group From the dropdown list, select the required parameter(s).
Certificate Attribute(s)	To add more recipients for the alert email, you can retrieve email addresses from any certificate attribute that has the email ID as its value, for example, Cert Owner. From the dropdown list, select the certificate attribute.
CC	
Recipient(s)*	Enter the email address of stakeholders who are to receive a copy of the expiry alert email.
Email Subject	
Subject*	Enter the subject line for the expiry alert email.
Email Body	
Body*	Enter the body text for the email using the following (recommended) format: The list of placeholder that can be used in the Subject <list and it's value> Certificate with Common Name Common Name Serial number Serial Number issued by Issuer Common Name is about to expire on Valid Until

Field	Description
	 Note: The full list of placeholders and their corresponding values is given here.
Certificate Parameters For Email Body*	Select the certificate parameters from the drop-down menu that you want to include in the alert notification, either in the attachment or in the email body as a table. The following parameters are mandatory to be selected for the alert notification: • Common Name • Serial Number • Valid From • Valid Until • Leaf Count
Certificate Attributes For Email Body*	Select the user defined certificate attributes from the drop-down menu that you want to include in the alert notification, either in the attachment or in the email body as a table.
* - Mandatory	

8. Click **Add**.

The created alert is listed under the Expiry Alert page.



Tip: To edit/delete an alert, use the **Edit/Delete** button, as required. You can add more alert configuration for the alert.

9. Under Alert Execution Type:



Note: The settings configured here will be applicable to all expiry alerts listed in the above table.

a. To trigger the alert immediately, select **Run Now** and click **Save**.

OR

b. To trigger the alert at a scheduled time, select **Schedule** and enter/select the following details:

- **Time Zone***
- **Frequency** (daily/weekly/monthly/yearly)
- **Starts On***
- **Ends**
 - For ends **ON**, use the calendar widget to select the date on which the last expiry alert email will be sent.
 - For ends **After**, enter the number of **Occurrences** after which the expiry alert will be discontinued.

10. Click **Save**.

The alert notification trigger based on the selected notification alert and format.



Note: For CA Certificates, the notification alert will include additional columns for **Cluster Name**, **Namespace**, and **Leaf Count**. These columns provide a clearer understanding of the certificates issued and their associated expiry details, making it easier to track and manage certificate statuses across clusters.


Logs

Logs keep track of all activities that take place within KUBE+ or any external entity that is connected to the AppViewX system. The Logging functionality in AppViewX tracks user activities and creates the service level event logs.

To access the logs related to KUBE+, go to **menu > KUBE+ > LOGS > Logs** and then click the **Kube** tab, if not selected by default.

On the Logging page,

- go to the pages, click the  (navigation) icon.
- hover the mouse over the number of row displayed on the page, the Show popup opens and choose the no. of rows to be displayed on the page.

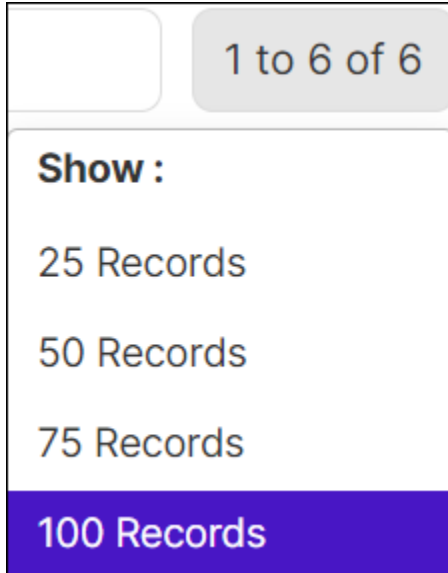

Viewing Details of a Log

To view log details:

1. Go to **Menu > KUBE+ > LOGS > Logs**.
2. On the **Logging** page, click the **Kube** tab.
3. On the log screen, view all details for a log by hovering your cursor over each column of data or click the  (**Expand**) icon for the log you want to view. The table row expands to display all details for the log.



Note: Search for any logs from the logging list based on User, Device name, log message, object details, source IP, AppViewX node, Method of login also search based on a particular column.

Filtering the Logs

To filter the logs:

1. Go to **Menu > KUBE+ > LOGS > Logs**.
2. Click the **Kube** tab.
3. On the Logging page, follow any of the following method to filter the logs:
 - Click ☺ (**DateTime**) icon, select the date range, and then click **OK** to view the logs within the date range.
 - Click the dropdown option beside the DateTime icon, and then select the preferred option. The options are:
 - Service
 - User
 - Type
 - Log Message
 - Severity

Automation


- [Requests](#)
- [Rules](#)

Requests

You can group your workflows accordingly and create a workflow catalog. The list of grouped workflows in the catalog will be displayed in this section.

- The **Workflow Request** section displays the total number of **All**, **Open**, **Closed**, and **Failed** requests, clicking upon these tabs displays the corresponding workflow details in a table.
- You can also perform the following tasks:

- Right-click the **Request ID** and select one of the following options from the pop up that appears:
 - **Rollback** - Triggers an alternative rollback workflow that you have added or imported for the workflow.
 - **View details** - Displays all the tooltips configured in the Global variables.

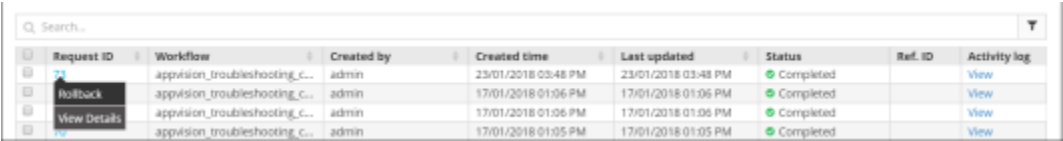

The screenshot shows a table with columns: Request ID, Workflow, Created by, Created time, Last updated, Status, Ref. ID, and Activity log. A context menu is open over the first 'Request ID' cell, showing options: Rollback and View Details. The table contains three rows of data, all with a 'Completed' status.


Request ID	Workflow	Created by	Created time	Last updated	Status	Ref. ID	Activity log
73	appvision_troubleshooting_C...	admin	23/01/2018 03:48 PM	23/01/2018 03:48 PM	Completed		View
	appvision_troubleshooting_C...	admin	17/01/2018 01:06 PM	17/01/2018 01:06 PM	Completed		View
	appvision_troubleshooting_C...	admin	17/01/2018 01:06 PM	17/01/2018 01:06 PM	Completed		View

- From the **Request ID** column, you can click on the request for which you want to view the details. On the tabs in this screen, you can perform the following tasks:

For the workflow(s) containing grid component(s) and script(s) to generate data, you can click the  (**Download**) button to save the data to PC in XLS or CSV file format.

- Search for a request using the **Search** field.

- Click the  (**Filter**) button to select the options you want to use to sort the requests.

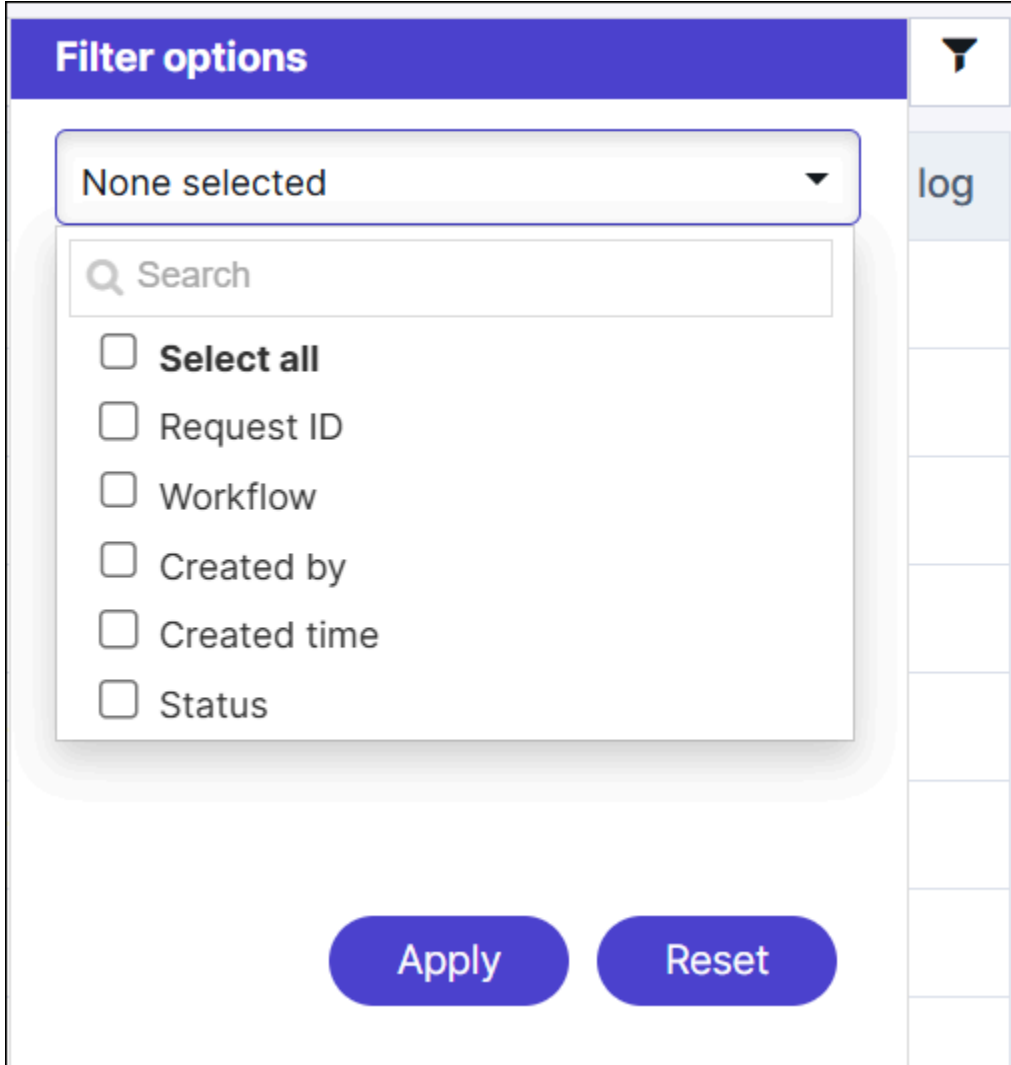

The image shows a 'Filter options' dialog box. It has a blue header with the text 'Filter options' and a funnel icon. Below the header is a dropdown menu currently showing 'None selected'. To the right of the dropdown is a 'log' button. Below the dropdown is a search bar with a magnifying glass icon and the text 'Search'. Under the search bar is a list of checkboxes: 'Select all', 'Request ID', 'Workflow', 'Created by', 'Created time', and 'Status'. At the bottom of the dialog are two blue buttons: 'Apply' and 'Reset'.

Rules

- [Creating Rules](#)
- [Cloning Rules](#)
- [Deleting Rules](#)

Creating Rules

The rule builder allows you to automate the configuration of cluster policies and map the issuer CA to the cluster. Additionally, you can also automate the pushing of the issuer CA.

Prerequisites

- **Enable Onboarding Policy:** Go to **Menu > SYSTEM ADMINISTRATION > Policy Settings** and enable the **Enable On-boarding Policy** toggle button. This will allow the rule builder to configure the cluster policy to the cluster and map the issuer CA.
- **Auto Provisioning:** If required to automate the pushing of the issuer CA settings to the cluster, enable the **Enable Auto provision of PKI Policy** toggle button under **Menu > SYSTEM ADMINISTRATION > Policy Settings**.

To create a rule using the rule builder:

1. Go to **Menu > KUBE+ > AUTOMATION > Rules**.
The **Rule : Access Control** page is displayed.
2. Click **Create Rule**.
The **Rules : Create** page displayed.
3. On the **Rule Details** section, do the following actions:
 - a. In the **Rule Name** box, enter a name for the rule.
 - b. (Optional) In the **Description** box, enter additional information about the rule.
4. On the **Rules** section, configure the rules as follows:
 - a. From the default rules list, click Query or Script of **Kube On-boarding Rule**.
 - b. When you click on **Query** - The **Rule builder :: Kube Rule**, popup window opens:
 - Select a cluster policy from the **Cluster Policy** drop-down option.
 - Select an issuer CA from the **Issuer CA** drop-down option.
 - AND or OR condition for monitoring the dynamic tagging of clusters
 - Click **Add Filter** and select the field information from the drop-down list.
 - (Optional) Add filter group by clicking **Add filter Group** and then select the field information from the drop-down list.
 - c. Click **Save**.



Note:

- To discard the changes, click **Cancel**.
- To clear the details, click **Reset**.

5. Go to the Rule inventory page, enable the **Status** toggle button against the desired rule.

This activates the rule. You can also disable this rule, if it is not required by disabling the **Status** toggle button.

What's Next

- [Configuring Policy Settings](#)

Cloning Rules

Administrators can clone resource rules.

To clone a rule:

1. Go to **Menu > KUBE+ > AUTOMATION > Rules**.
The **Rule : Access Control** page is displayed.
2. Select a rule from the list.
3. Click **More actions** drop-down option.
4. Click **Clone**.
The **Clone rules** popup window opens.
5. If required, alter the rule name in the **Rule name** field.
6. Click **Save**.

Deleting Rules

Administrators can delete the rules.

To delete a rule:

1. Go to **Menu > KUBE+ > AUTOMATION > Rules**.
The **Rule : Access Control** page is displayed.
2. Select a rule from the list.
3. Click **More actions** drop-down option.
4. Click **Delete**.
The **Confirm delete** popup window opens.
5. Click **Yes**.


System Administration

- [Crypto Minions](#)
- [Configuring Cluster Settings](#)
- [Configuring Policy Settings](#)
- [Configuring Email Settings](#)
- [Setting up Configurations for Expired Certificates](#)
- [Auto Enrollment](#)

Crypto Minions

Crypto Minions displays the list of Crypto minions within a cert-orchestrator. On the Crypto Minions page,

- refresh the list, click the  (refresh) icon.
- go to the pages, click the  (navigation) icon.
- hover the mouse over the number of row displayed on the page, the **Show** popup opens and choose the no. of rows to be displayed on the page.

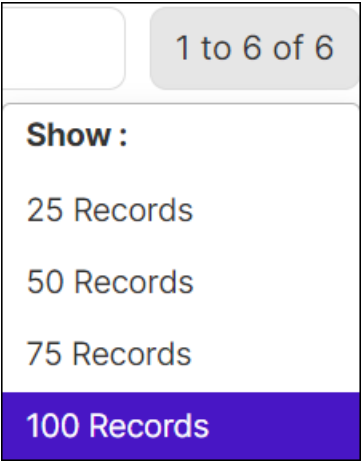

The Crypto Minions inventory list includes the following information:

Column Name	Description
Cluster Name	Name of the cluster.

Column Name	Description
Status	Status of the cluster.
No. of Nodes	Nodes enabled for the cluster.
Status	Status of the resource. The possible statuses are Managed, Unmanaged, or Pending Approval.
Cert Orchestrator Version	The version of Cert Orchestrator.
CSI Provider Version	The version tag of the image.
Infra Orchestrator Version	The version of the Infra Orchestrator.

Configuring Cluster Settings

To configure repository settings:

1. Go to **Menu > KUBE+ > System Administration > Cluster Settings**.
2. On the **Helm Repository** section, enter the details. Contact AppViewX support to get the authentication credentials for the Helm repository.

Helm Repository - Field and Description Table

Field	Description
Repository URL	Enter the helm repository URL.
Username	Enter the username.
Password	Enter the password.

3. When deploying AppViewX KUBE+ components in the cluster, kube rbac proxy image is used for RBAC authentication. This image is typically downloaded directly from the internet. However, if you need to pull the image from a custom repository, replace the URL and tag as follows:

- URL: gcr.io/kubebuilder/kube-rbac-proxy
- Tag: v0.13.0

4. On the Docker Repository section, enter the details. Contact AppViewX support to get the authentication credentials for the Docker repository.

Docker Repository - Field and Description Table

Field	Description
Repository URL	Enter the Docker repository URL.
Username	Enter the username.
Password	Enter the password.

Configuring Policy Settings

Policy settings manage the onboarding and offboarding process when a cluster is added to or deleted from the inventory. Configuring the policy automates the manual steps involved in integrating KUBE+ with the onboarded clusters and ensures data integrity and security when clusters are offboarded from KUBE+.

To configure policy settings:

1. Go to **Menu > KUBE+ > System Administration > Policy Settings**.
2. Configure the off-boarding policy as follows:
 - a. Click **Yes** in the **Enable Off-boarding Policy** field.
 - b. In the **What needs to be Off-boarded from Cluster?** section, select any of the following options as needed:
 - **Revoke Certificates deployed** - This option allows the removal of certificates associated with the cluster during the off-boarding process.
 - **Revoke Issuer CA deployed** - This option allows the removal of the issuer CA associated with the cluster during the off-boarding process.
 - c. In the **What needs to be Off-boarded from AppViewX Inventory?** section, select any of the following options as needed:
 - **Auto Manage Certificate Groups** - When the namespace is deleted in the cluster, all the resources under the certificate group (auto created) including the certificate and under the namespace will be deleted.
 - **Delete Certificate YAML** - This option allows removing the certificate YAML from the AppViewX inventory.
 - **Delete Issuer CA** - This option allows removing the issuer CA from the AppViewX inventory.

- **Disassociate Policy** - This option allows removing entry of cluster if policy is cluster wide. Otherwise, removes the namespace of the cluster.
- **Delete Certificates** - This option allows removing the certificates associated with the cluster.
- **Delete Certificate Groups** - This option allows removing the auto created certificate groups.
- **Delete Cluster** - This option allows removing the cluster from the Cluster inventory.

3. Configure the on-boarding policy as follows:

- a. Click **Yes** in the **Enable On-boarding Policy** field.
- b. Click **Yes** in the **Enable Auto provision of PKI Policy** field to onboard new clusters with automated policy and PKI configuration.

4. Click **Save**.

Configuring Email Settings

Within this section, you find email setting templates for certification action request. You have the capability to customize email IDs for each certification action requests. Once you've configured the email settings, emails will be automatically sent to the designated email addresses.

To configure email settings:

1. Go to **Menu > KUBE+ > System Administration > Email Settings**.
2. Click on the preferred certification action request.
3. Enter the valid email IDs in the displayed fields.

You can customize the field names by clicking on them and entering your preferred names. Additionally, you can add more fields by clicking the **Add** button. If any of the fields are not required, you can remove them by clicking the delete icon.



Note: You can enter multiple email addresses, separated by commas.

4. Click **Save Changes**.

Setting up Configurations for Expired Certificates

You can configure the settings for handling expired certificates.

To configure the setting for the expired certificates:

1. Go to **Menu > KUBE+ > System Administration > Expired Certificates**.
2. On **Expired certificate** section, enter/select the following details:

Expired certificate - Field and Description Table

Field	Description
Do you want to delete the expired certificates?	The options are: • No (default) - allows to retain the expired certificates. • Yes - to delete the expired certificates within the specified expiry date. When you select this option, you need to fill the following details: • Number of days after expiry • Backup Required • Do you want to delete the certificates from all groups?

3. On **Expired root and intermediate certificate** section, enter/select the following details:

Expired root and intermediate certificate - Field and Description Table

Field	Description
Do you want to delete the expired root and intermediate certificates?	The options are: • No (default) - allows to retain the expired root and intermediate certificates. • Yes - to delete the expired root and intermediate certificates within the specified expiry date. When you select this option, you need to fill the Number of days after expiry field.

4. Click **Save**.

Auto Enrollment

- EST

EST

EST stands for Enrollment over Secure Transport, it is a certificate management protocol targeting Public Key Infrastructure (PKI) clients which require digital certificates to prove their authenticity. EST also helps the clients in acquiring associated CA certificates. Some prerequisites and features are as follows:

- There should be an agent (avx_vendor_cert_est_agent) up and running for EST in AppViewX.
- This EST plugin can either be in HTTPS or HTTP, but it needs a gateway which supports client certificate authentication running in order to communicate with the client.
- It is highly recommended to keep the 'Approval Required' flag OFF in the **Menu > KUBE+ > GROUPS & POLICIES > CA Policy** page.

- [Configuring EST](#)

- [Validating EST](#)

Configuring EST

To perform client certificate enrollments using EST protocol, the admin or a privileged user needs to first set up the EST server agent using the AppViewX portal. Upon successful set up of the EST server Agent through the portal, a URL will be generated. Clients can then use this URL to send enrollment requests to AppViewX via EST protocol.

The detailed steps for setting up the EST server agent are listed below:

1. Go to **Menu > KUBE+ > System Administration > Auto Enrollment > EST**.
2. Select **Add** or **Configure Now**.
3. Configure the **End Point Details** details as follows:

Prerequisites for entering the IP/FQDN field:

- The "Cloud Connector Name" (in the Add Cloud connector page) must be the same as the FQDN name entered.
- The CC should have the reachability to the Endpoint.
- If entering the IP then ensure that a single cloud connector is used.

The following table provides the field description for Agent Details section:

End Point Details - Field and Description Table

Field Name	Field Type	Description	Validation
*Name	Text	A unique name (alphanumeric string) to identify the agent setting. Acceptable Characters: A-Z, a-z, 0-9, '.', '_', '-'	Name should not start with special characters.
*FQDN/IP	Text	Enter the FQDN/IP address of the AppViewX cloud connector.	Invalid FQDN/IP address (example: xxx.xxx.xxx.xxx)
*Port	Text	HTTP gateway port of the AppViewX node.	Port will accept only numerical values between 0 to 65535.
NOTE: Fields with * (asterisk) are mandatory.			

4. Configure the **Client Authentication** details as follows:

Client Authentication = Only Certificate TLS

Client Authentication = Certificate TLS with HTTPs as fallback or Both Certificate TLS and HTTPs

The following table provides the field description for CA Authentication section:

Details for CA Authentication- Field and Description Table

Field Name	Field Type	Description	Validation
Authentication Mode	Dropdown	Select any one authentication method to be carried out during communication with clients. • <i>Only Certificate TLS</i> - During client authentication, only certificate TLS based authentication will be performed. • <i>Certificate TLS with HTTPs fallback</i> - During client authentication, when the	NA

Field Name	Field Type	Description	Validation
		certificate TLS fails, HTTPs based authentication will be performed as fallback. • <i>Both Certificate TLS and HTTPs</i> - During client authentication, both certificate TLS and HTTPs authentication will be performed one after the successful completion of the other.	
*Issuer Certificate	Dropdown	Select one or more issuer certificates which needs to be checked for the client certificate authentication.	NA
*HTTP Authentication Mode	Radio button	Select the type of HTTP auth mode either Basic/Digest. • <i>Basic</i> - During Client authentication only the username and password values will be considered for HTTPs based authentication. • <i>Digest</i> - During Client authentication, along with username and password, nonce and realm values will also be supported.	NA
*Fallback Credentials	Radio button	Select Manual/Logged on user credentials - based on the selection users can configure the credentials manually or save	

Field Name	Field Type	Description	Validation
		as credentials equivalent to the logged in user. • <i>Manual</i> - The Username and Password fields will be displayed to enter values. • <i>Logged on user credentials</i> - The Username and Password fields will not be displayed.	
*Username	Text	Username for HTTP authentication.	NA
*Password	Text	Password for HTTP authentication.	NA
NOTE: Fields with * (asterisk) are mandatory.			

5. Configure the **CA Accounts** details as follows:

The following table provides the field description for CA Accounts section:

CA Accounts - Field and Description Table

Field Name	Field Type	Description	Validation
*Certificate Group	Dropdown	Select a specific group under which certificate needs to be enrolled.	NA
*Certificate Category	Radio button	Select a specific certificate type (Server/ Client) to be enrolled.	NA
*Select CA	Dropdown	Select the required CA from the available options. The certificate will be enrolled under the selected CA. The CAs associated with the Default certificate group are: • AppViewX • AppViewX PKIaaS	NA

Field Name	Field Type	Description	Validation
		• Amazon Private CA • DigiCert • DigiCert MPKI • Ejbca • Entrust • Entrust MPKI • GlobalSign Atlas • GlobalSign MSSL • Google • HydrantID • Microsoft Enterprise • Microsoft Standalone • Nexus  Note: The Vendor Specific Details and Custom Attributes section are displayed for some of the CAs as follows: • DigiCert • EJBCA • Entrust • Entrust MPKI • GlobalSign MSSL • MS Enterprise • Nexus	
NOTE: Fields with * (asterisk) are mandatory.			

When **AppViewX** is selected as CA, The following table provides the field description for AppViewX CA:

Details for AppViewX CA - Field and Description Table

Field Name	Field Type	Description	Validation
*CA Account	Select	Select a specific CA Account from the	NA

Field Name	Field Type	Description	Validation
		selected CA which is to be used for certificate creation operations.	
*Server Certificate	Select	Type 3 or more letters of the certificate keywords after which a list of server certificates issued from the above selected CA account will be displayed, one certificate can be selected for further communications with SCEP client machine.	NA
*CA Connector Name	Text	Name of the CA connector after certificate is being enrolled.	NA
*Certificate Validity	Text	Validity of the certificate to be enrolled.	Certificate validity accepts only numerical values
NOTE: Fields with * (asterisk) are mandatory.			

When **AppViewX PKIaaS** is selected as CA. The following table provides the field description for AppViewX PKIaaS CA:

Details for AppViewXPKIaaS CA - Field and Description Table

Field Name	Field Type	Description	Validation
*CA Account	Dropdown	Select a specific CA Account from the selected CA which is to be used for certificate creation operations.	NA

Field Name	Field Type	Description	Validation
*Issuer Location	Dropdown	Select an issuer location that is associated with the CA account.	NA
*Pool Name	Dropdown	Select a pool name to issue the certificate.	NA
*Issuer Name	Dropdown	Select an issuer name to issue the certificate.	NA
*CA Certificate	Dropdown	Select the specific issuer certificate, that will be used for signing CSR by the certificate authority. Certs available in the root or intermediate cert inventory are displayed.	NA
*CA Connector Name	Text	Name of the CA connector after certificate is being enrolled.	NA
*Certificate Validity	Text	Validity of the certificate to be enrolled.	Certificate validity accepts only numerical values.

When **Amazon Private CA** is selected as CA. The following table provides the field description for Amazon Private CA:

Details for Amazon Private CA - Field and Description Table

Field Name	Field Type	Description	Validation
*CA Account	Dropdown	Select a specific CA Account from the selected CA which is to be used for certificate creation operations.	NA
*Region	Dropdown	Select a valid region associated with the CA account. The dropdown is populated with the first available value. Select an appropriate value as required.	NA

Field Name	Field Type	Description	Validation
*Issuer	Dropdown	Select a valid issuer associated with the CA account. The dropdown is populated with the first available value. Select an appropriate value as required.	NA
*Signature Algorithm	Dropdown	Select a valid issuer associated with the CA account. The dropdown is populated with the first available value from the group's associated policy. Select an appropriate value as required.	NA
*CA Certificate	Text	Select the specific issuer certificate, that will be used for signing CSR by the certificate authority. Certs available in the root or intermediate cert inventory are displayed.	NA
*CA Connector Name	Text	Name of the CA connector after the certificate is enrolled.	NA
*Certificate Validity	Dropdown	Validity of the certificate to be enrolled. (in years)	Certificate validity accepts only numerical values.
NOTE: Fields with * (asterisk) are mandatory.			

When **DigiCert CA** is selected as CA. The following table provides the field description for DigiCert CA:

Details for DigiCert CA - Field and Description Table

Field Name	Field Type	Description	Validation
*CA Account	Dropdown	Select a specific CA Account from the selected CA which is to be used for certificate creation operations.	NA
*Division	Dropdown	Select a division associated with the CA account.	NA

Field Name	Field Type	Description	Validation
		The dropdown is populated with the first available value. Select an appropriate value as required.	
*Certificate Type	Dropdown	Select a valid cert type associated with the CA account. The dropdown is populated with the first available value. Select an appropriate value as required.	NA
*CA Certificate	Text	Select the specific issuer certificate, that will be used for signing CSR by the certificate authority. Certs available in the root or intermediate cert inventory are displayed.	NA
*CA Connector Name	Text	Name of the CA connector after the certificate is enrolled.	NA
*Certificate Validity	Dropdown	Validity of the certificate to be enrolled. (in days/months/years)	Certificate validity accepts only numerical values.
NOTE: Fields with * (asterisk) are mandatory.			

If the **Select CA =DigiCert**, then a separate section **Vendor Specific Details** is displayed after the CA Accounts section with two fields described below.

Vendor Specific Details for DigiCert CA - Field and Description Table

Field Name	Field Type	Description	Validation
*Server Type	Dropdown	Select a server type. The dropdown is populated with the first available value. Select an appropriate value as required.	NA
*Payment Method	Dropdown	Select a payment method. The possible options are:	Alphanumeric characters, spaces, and

Field Name	Field Type	Description	Validation
		1. Bill To Account Balance - Pay with the account balance. Returns an error if this option is disabled for the account or if the account has an insufficient fund. 2. Bill To Default Credit Card - Pay with the account's default credit card. Returns an error if no default credit card is configured for the account	the special characters - _.* are allowed.
NOTE: Fields with * (asterisk) are mandatory.			

When **DigiCert MPKI** is selected as CA. The following table provides the field description for DigiCert MPKI:

Details for DigiCert MPKI CA - Field and Description Table

Field Name	Field Type	Description	Validation
*CA Account	Dropdown	Select a specific CA Account from the selected CA which is to be used for certificate creation operations.	NA
*Profiles	Dropdown	Select a profile from the dropdown option.	NA
*CA Certificate	Text	Select the specific issuer certificate, that will be used for signing CSR by the certificate authority. Certs available in the root or intermediate cert inventory are displayed.	NA
*CA Connector Name	Text	Name of the CA connector after the certificate is enrolled.	NA
NOTE: Fields with * (asterisk) are mandatory.			



Note: **Email address** is a mandatory field on the enrollment form for DigiCert MPKI, but while passing it in the CSR, it is not added in certificate subject DN. Therefore, to successfully renew DigiCert MPKI certificates using EST Fetch Certificate Parameters in EST Advanced Settings should be set to YES.

The **Custom Attributes** section is displayed on selecting the specific values from the **Profile** dropdown:

Custom Attributes for DigiCert MPKI CA - Field and Description Table

Field Name	Field Type	Mandatory	Description	Validation
*common_name	Text	Yes	This field will be auto-populated from the CSR.	NA
*dnsName	Text	Yes	Enter a valid DNS name.	NA
NOTE: Fields with * (asterisk) are mandatory.				



Note: Based on the DigiCert MPKI account configuration **Custom Attributes** section may also be displayed on the endpoint configuration page.

When **Ejbca** is selected as CA. The following table provides the field description for Ejbca CA:

Details for Ejbca CA - Field and Description Table

Field Name	Field Type	Description	Validation
*CA Account	Dropdown	Select a specific CA Account from the selected CA which is to be used for certificate creation operations.	NA
*CA Certificate	Dropdown	Select the specific issuer certificate, that will be used for signing CSR by the certificate authority. Certs available in the root or intermediate cert inventory are displayed.	NA
*CA Connector Name	Dropdown	Name of the CA connector after certificate is being enrolled.	NA

Field Name	Field Type	Description	Validation
*Certificate Validity	Text	Validity of the certificate to be enrolled.	Certificate validity accepts only numerical values.
NOTE: Fields with * (asterisk) are mandatory.			

If the selected CA is Ejbca, a separate section **Vendor specific details** is displayed after the CA Accounts section. The following table provides the field description for Vendor specific details:

Vendor Specific Details for Ejbca CA - Field and Description Table

Field Name	Field Type	Description	Validation
*End Entity Profile Name	Dropdown	Select a profile of an end entity.	NA
End entity user name	Text	Enter the user name for the end entity.	Alphanumeric characters, spaces, and the special characters -_.* are allowed.
*Issuer Common Name	Dropdown	Select a common name of an issuer.	NA
*Certificate Profile Name	Dropdown	Select a profile name of certificate.	NA
NOTE: Fields with * (asterisk) are mandatory.			

When **Entrust** is selected as CA. The following table provides the field description for **Entrust CA**:

Details for Entrust CA - Field and Description Table

Field Name	Field Type	Description	Validation
*CA Account	Dropdown	Select a specific CA Account from the selected CA which is to be used for certificate creation operations.	NA

Field Name	Field Type	Description	Validation
*Certificate Type	Dropdown	Select a valid cert type associated with the CA account. - If the Certificate Category radio button is selected to <i>Server</i>, the dropdown is populated with the first available value. Select an appropriate value as required. - If the Certificate Category radio button is selected to <i>Client</i>, the dropdown is populated with 'None' as the default value.	NA
*CA Certificate	Text	Select the specific issuer certificate, that will be used for signing CSR by the certificate authority. Certs available in the root or intermediate cert inventory are displayed.	NA
*CA Connector Name	Text	Name of the CA connector after the certificate is enrolled.	NA
*Certificate Validity	Dropdown	Validity of the certificate to be enrolled. (in days/months/years)	Certificate validity accepts only numerical values.

- If the selected CA is **Entrust**, a separate section displaying **Vendor specific details** and **Custom Attributes** is displayed after the **CA Accounts** section.



Note: Based on the Entrust ECS account configuration **Custom Attributes section** may also be displayed as shown above.

Vendor Specific Details for Entrust CA - Field and Description Table

Field Name	Field Type	Description	Validation
Additional Emails	Text	Enter the valid email address in the field.	NA
Requester Name	Text	Enter the requester name	NA
Requester Email	Text	Enter a valid email id.	NA
Requester Phone	Text	Enter the 10-digit phone number.	NA

When **Entrust MPKI** is selected as CA. The following table provides the field description for Entrust MPKI CA:

Details for Entrust MPKI CA - Field and Description Table

Field Name	Field Type	Description	Validation
*CA Account	Dropdown	Select a specific CA Account from the selected CA which is to be used for certificate creation operations.	NA
*CA Certificate	Dropdown	Select the specific issuer certificate, that will be used for signing CSR by the certificate authority. Certs available in the root or intermediate cert inventory are displayed.	NA
*CA Connector Name	Text	Name of the CA connector after certificate is being enrolled.	NA
NOTE: Fields with * (asterisk) are mandatory.			

When **GlobalSign Atlas** is selected as CA

The following table provides the field description for **GlobalSign Atlas CA**:

Details for GlobalSign Atlas CA - Field and Description Table

Field Name	Field Type	Description	Validation
*Select CA	Dropdown	Select a specific CA Account from the selected CA which is to be used for certificate creation operations.	NA
API Credential	Dropdown	Select a CA Account to communicate with during the certificate enrollment actions.	NA

Field Name	Field Type	Description	Validation
Friendly name			
Certificate Profile	Dropdown	Select the certificate Profile from the dropdown.	NA
*CA Certificate	Dropdown	Select the specific issuer certificate, that will be used for signing CSR by the certificate authority. Certs available in the root or intermediate cert inventory are displayed.	NA
*CA Connector Name	Select	Name of the CA connector after the certificate is enrolled.	NA
*Certificate Validity	Dropdown	Validity of the certificate to be enrolled. (in days/months/years)	Certificate validity accepts only numerical values.
NOTE: Fields with * (asterisk) are mandatory.			

A **Generic Fields** section is also displayed below the CA Accounts section. It contains the fields related to the CSR parameters based on the profile (API Credential Friendly name) selected. Only the Organization field is mandatory and is fetched from the selected profile. Rest of the fields are optional.

- When **GlobalSignMSSL** is selected as CA,

The following table provides the field description for GlobalSignMSSL CA:

Details for GlobalSign MSSL CA - Field and Description Table

Field Name	Field Type	Description	Validation
*CA Account	Dropdown	Select a specific CA Account from the selected CA which is to be used for certificate creation operations.	NA
*Product Type	Dropdown	Select the specific Product Type. The values are fetched from the CA Settings configuration.	NA

Field Name	Field Type	Description	Validation
*CA Certificate	Select	Select the specific issuer certificate, that will be used for signing CSR by the certificate authority. Certs available in the root or intermediate cert inventory are displayed.	NA
*CA Connector Name	Select	Name of the CA connector after the certificate is enrolled.	NA
*Certificate Validity	Dropdown	Validity of the certificate to be enrolled. (in days/months/years)	Certificate validity accepts only numerical values.
NOTE: Fields with * (asterisk) are mandatory.			

The following field is displayed in the **Vendor Specific Details** section as per the selected CA:

Vendor Specific Details for GlobalSign MSSL CA - Field Description Table

Field Name	Field Type	Description	Validation
*Profile name	Dropdown	Select the Profile based on the configurations made in the Certificate Authority Setting.	NA

The following field is displayed in the **Point of Contact** section as per the selected CA. The CA mandates the point of contact information for traceability. All auto-enrollment requests via this endpoint will be registered with the point of contact information entered here.

POC Details for GlobalSign MSSL CA - Field and Description Table

Field Name	Field Type	Description	Validation
*First Name	Text	Enter the first name	NA
*Email Address	Text	Enter the valid email address	NA
*Phone Number	Text	Enter the valid phone number	NA

When **Google** is selected as CA. The following table provides the field description for Google CA:

Details for Google CA - Field and Description Table

Field Name	Field Type	Description	Validation
*CA Account	Dropdown	Select a specific CA Account from the selected CA which is to be used for certificate creation operations.	NA
*Certificate Profile	Dropdown	Select the certificate profile type.	NA
*Issuer Location	Dropdown	Select an issuer location that is associated with the CA account.	NA
*Pool Name	Dropdown	Select a pool name to issue the certificate.	NA
*Issuer Name	Dropdown	Select an issuer name to issue the certificate.	NA
*CA Certificate	Dropdown	Select the specific issuer certificate, that will be used for signing CSR by the certificate authority. Certs available in the root or intermediate cert inventory are displayed.	NA
*CA Connector Name	Text	Name of the CA connector after certificate is being enrolled.	NA
*Certificate Validity	Text	Validity of the certificate to be enrolled.	Certificate validity accepts only numerical values.
NOTE: Fields with * (asterisk) are mandatory.			

When **HydrantID** is selected as CA. The following table provides the field description for HydrantID CA:

Details for HydrantID CA - Field and Description Table

Field Name	Field Type	Description	Validation
*CA Account	Dropdown	Select a specific CA Account from the selected CA which is to be used for certificate creation operations.	NA
*HydrantID Policy	Dropdown	Select the policy associated with the CA Account to be used for certificate operations.	NA
*CA Certificate	Dropdown	Select the specific issuer certificate, that will be used for signing CSR by the certificate authority. Certs available in the root or intermediate cert inventory are displayed.	NA
*CA Connector Name	Text	Name of the CA connector after certificate is being enrolled.	NA
*Certificate Validity	Text	Validity of the certificate to be enrolled.	Certificate validity accepts only numerical values.
NOTE: Fields with * (asterisk) are mandatory.			

When **Microsoft Enterprise** is selected as CA. The following table provides the field description for Microsoft Enterprise CA:

Details for Microsoft Enterprise CA - Field and Description Table

Field Name	Field Type	Description	Validation
*CA Account	Dropdown	Select a specific CA Account from the selected CA which is to be used for certificate creation operations.	NA
*CA Certificate	Dropdown	Select the specific issuer certificate, that will be used for signing CSR by the certificate authority. Certs available in the root or intermediate cert inventory are displayed.	NA
*CA Connector Name	Text	Name of the CA connector after certificate is being enrolled.	NA
*Certificate Validity	Text	Validity of the certificate to be enrolled.	Certificate validity accepts only numerical values.
NOTE: Fields with * (asterisk) are mandatory.			

- If the selected CA is Microsoft Enterprise, a separate section **Vendor specific details** is displayed with a **Template Name** dropdown after the CA Accounts section.

When **Microsoft Standalone** is selected as CA. The following table provides the field description for Microsoft Standalone CA:

Details for Microsoft Standalone CA - Field an Description Table

Field Name	Field Type	Description	Validation
*CA Account	Dropdown	Select a specific CA Account from the	NA

Field Name	Field Type	Description	Validation
		selected CA which is to be used for certificate creation operations.	
*CA Certificate	Dropdown	Select the specific issuer certificate, that will be used for signing CSR by the certificate authority. Certs available in the root or intermediate cert inventory are displayed.	NA
*CA Connector Name	Text	Name of the CA connector after certificate is being enrolled.	NA
NOTE: Fields with * (asterisk) are mandatory.			

When **Nexus** is selected as CA,

The following table provides the field description for **Nexus CA**:

Details for Nexus CA - Field and Description Table

Field Name	Field Type	Description	Validation
*CA Account	Dropdown	Select a specific CA Account from the selected CA which is to be used for certificate creation operations.	NA
*CA Certificate	Select	Select the specific issuer certificate, that will be used for signing CSR by the certificate authority. Certs available in the root or intermediate cert inventory are displayed.	NA
*CA Connector Name	Select	Name of the CA connector after the certificate is enrolled.	NA

Field Name	Field Type	Description	Validation
*Certificate Validity	Select	Validity of the certificate to be enrolled. (in days/months/years)	Certificate validity accepts only numerical values.

The following field is displayed in the **Vendor Specific Details** section as per the selected CA:

Details for Nexus CA - Field and Description Table

Field Name	Field Type	Description	Validation
*Procedure	Dropdown	Select the Procedure based on the configurations made in the Certificate Authority Setting.	NA

6. Configure the **Advanced Settings** details as follows:

The following table provides the field description for Advanced Settings:

Advanced Setting - Field and Description Table

Field Name	Field Type	Description
*Switch to Enroll	Radio button	Select Yes or No Selecting the radio button as Yes will convert the re-enrollment requests to enrollment requests
*Fetch Certificate Parameters	Radio button	Select Yes or No Setting the radio button to Yes, will enable the system to automatically fetch certificate parameters from a Suggestive Policy, and append them to the client CSRs.

Field Name	Field Type	Description
*Include Truststore Certificates	Radio button	Select whether the issuer certificate needs to be sent to client machines after enrolment.
*High Speed Transactions	Radio button	Based on the selection of this field, the endpoint will be configured with or without High Performance transaction times. Request information pertaining to High-Performance can be viewed on the Direct Requests page.
*Return Existing Certificate	Radio button	If this option is enabled (Yes) then for request with AppViewX should check and return the existing valid certificate for the same CSR & public key from inventory if available otherwise it should proceed with enrollment and return the certificate. • If it is set to Yes, the Certificate Threshold field is displayed. If the option is disabled (No) then the AppViewX will do the default behavior of enrolling a new certificate for each request.
Certificate Threshold	Text (numeric)	This field is enabled only if Return Existing Certificate = Yes. Enter the number of days in this field. This value is used to Initiate a new certificate request

Field Name	Field Type	Description
		if the certificate is nearing the expiry date i.e., if existing certificate validity is less than the entered value.
*Retry Count	Text	Values accepted between 5 - 99. Based on this value, the EST agent will trigger the number of calls to collect the certificate from AppViewX until it is received.
*Retry Frequency	Text	Values accepted between 10 - 99. The value specified in this field determines the duration taken between the trigger calls by the EST agent.
 Note: Fields with * (asterisk) are mandatory.		


7. Click **Save**.

Validating EST

Once the EST settings are added validation needs to be done to check whether the CA and Agent-related details are properly configured.

1. Go to **Menu > KUBE+ > System Administration > Auto Enrollment > EST**.
2. On the **EST** page, click **Check** to validate the EST setting that has been created.

The EST settings will be validated and the **Status** will be shown as either **Success** or **Failure**.

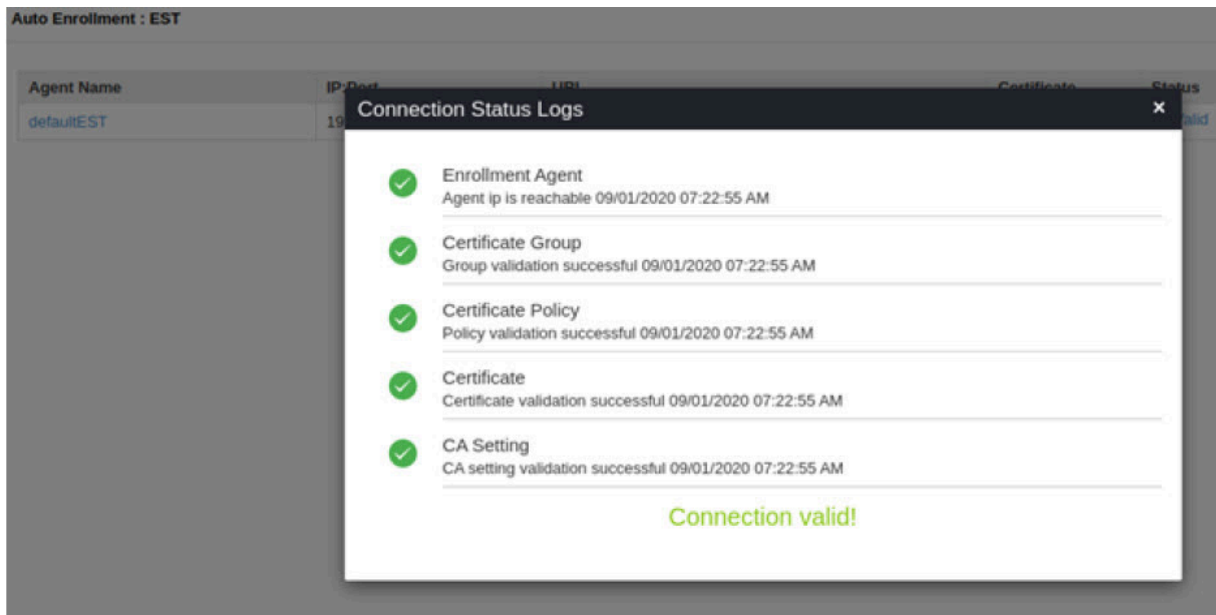

Notification Event

Event notifications for a cluster can be configured for various events. The following events can be set up from the Notification Policies:

- Cluster status changes to unhealthy
- Cluster service account expiry

Configuring Notification Event

To view and configure notification events for a cluster:

1. Click  (**Notification icon**) located at the upper right corner of the screen.
The triggered notification are listed.
2. Click **Action Center**.
3. On the **Notification Policies** screen, select the appropriate field information to configure notifications for the cluster status changing to unhealthy.

Notification Policies - Field and Description Table

Field	Description
Event	Select an event from the dropdown list. The KUBE+ specific events are: • Kube cluster status unhealthy Notification: Triggers a notification when the cluster status changes unhealthy. • Kube cluster service account expiry Notification: Triggers a notification 15 days before the service account expires.
Channels	Select the channels for notification. You can select multiple options from the following: • Push Notification: Sends a push notification to the AppViewX application. • Email: Sends the notification via email.
Recipient Category	Select the recipient category for notifications. Recipients will be displayed based on the selected options: • User: Allows selection of users from the dropdown menu who have the ACF permission to receive this notification. • User group: Allows selection of user groups from the dropdown menu who have the ACF permission to receive this notification. • Email / Distro: Allows selection of an email or email distribution list from the dropdown menu for those with ACF permission to receive this notification.

4. Click **Update**.

The event is added to the Event inventory.

Enabling Custom Workflow Integration

DevOps teams can integrate with the AppViewX automation suite to enable custom workflow integration. This allows them to call any external API service during SSL certificate automation. Use cases range from simple ITSM API calls to more complex CI/CD pipeline integrations. This is done by simply deploying a configMap in the targeted cluster which enables the cert-orchestrator to trigger the workflow process.

Prerequisites

To enable auto-trigger workflow option:

1. Enable auto-trigger workflow option in helm by setting the value to true `--set certOrchestrator.autoTrigger.workflow=true`.
2. Ensure the annotation matches and contains the workflow name.

The sample configmap json file to trigger the workflow:

```
apiVersion: v1
data:
  payload: |
    {
      "globalData": {},
      "task_action": 1
    }
kind: ConfigMap
metadata:
  name: my-config
  namespace: default
  annotations:
    appviewx.com/autotrigger: "true"
    appviewx.com/workflowname: "test_workflow"
```

Uninstall and Cleanup

- [Steps to Uninstall/Cleanup KUBE+ Deployment](#)

Steps to Uninstall/Cleanup KUBE+ Deployment

The in-cluster components of KUBE+ deployed in the Kubernetes cluster must be completely uninstalled, if the administrator wishes to cease certificate lifecycle management for the designated cluster.

To achieve this, execute the following commands to uninstall the KUBE+ in-cluster component Cert-Orchestrator from your cluster.

- Uninstall the Cert-Orchestrator by executing the following Helm command:

```
helm uninstall crypto-mesh -n crypto-mesh.
```

- Uninstall the CSI provider if the Ephemeral Volume Feature gate has been installed by executing the following command:

```
helm uninstall csi -n crypto-mesh
```



Note: If the CSI provider is already present in the cluster and was not installed as a part of the cert-orchestrator deployment you can skip the uninstall of the CSI provider step.

- Remove the KUBE+ helm repositories from your cluster by executing the following commands:

```
helm repo remove crypto-mesh
```

```
helm repo remove csi
```



Note: You should proceed with the removal of the CSI provider from the repository only if it was enabled during the Cert-Orchestrator installation. If the CSI provider was already available, you can skip this step.

- Even after deleting the components of Cert-Orchestrator, Kubernetes secrets, configmaps, and other associated metadata may still remain in the cluster. You can remove this residual data by deleting the namespace where Cert-Orchestrator is installed.

```
kubectl delete ns crypto-mesh
```



Note: If a custom namespace was used during the installation of Cert-Orchestrator, please replace 'crypto-mesh' with your specified custom namespace.

- During the installation of Cert-Orchestrator, it deploys multiple Custom Resource Definitions (CRDs) within the Kubernetes cluster. To remove these CRDs manually, execute the following command:

```
kubectl get crd | grep appviewx | awk '{print $1}' | xargs kubectl delete crd
```

The steps outlined above completely remove the KUBE+ in-cluster components from the cluster. If the Cert-Orchestrator has been successfully uninstalled, the following commands will produce an empty output.

The commands are:

- `kubectl get namespace | grep crypto-mesh`

**Note:** If the namespace name is not 'crypto-mesh,' replace it with your custom namespace.

- `kubectl get crd | grep appviewx`
- `helm repo list`

**Note:** The command above should exclude both 'crypto-mesh' and the CSI repo.

- `kubectl get pods -n crypto-mesh`

**Note:** The command above should not display any running pods.

FAQ and Troubleshooting

- [Command Line Cheat Sheet](#)
- [FAQ](#)

Command Line Cheat Sheet

List of kubectl commands for configuring and troubleshooting issues pertaining to KUBE+ in-cluster components.

Command Line Cheat Sheet Table

S. No.	Command	Purpose
1	<code>kubectl get all --all-namespaces</code>	lists resources (pods, services, deployments, etc.) in all namespaces.

Command Line Cheat Sheet Table (continued)

S. No.	Command	Purpose
2	<code>kubectl get namespace <namespace_name></code>	Retrieves information about a specific namespace in a Kubernetes cluster.
3	<code>kubectl delete namespace <namespace_name></code>	Deletes a specific namespace and all the resources contained within it in a Kubernetes cluster.
4	<code>kubectl get pod</code>	List all the pods in the current Kubernetes namespace.
5	<code>kubectl get pods -n=[namespace_name]</code>	lists all the pods in a specific namespace in a Kubernetes cluster. Replace "[namespace_name]" with the actual name of the namespace you want to target. This command displays information about the pods in that namespace
6	<code>kubectl delete pod <pod_name></code>	Deletes a specific pod in a Kubernetes cluster.
7	<code>kubectl get secrets</code>	Lists all the secrets available in the current Kubernetes namespace.
8	<code>kubectl describe secret <secret_name></code>	Displays detailed information about a specific secret in a Kubernetes cluster.
9	<code>kubectl delete secret <secret_name></code>	Deletes a specific secret in a Kubernetes cluster.
10	<code>kubectl apply -f manifest_file.yaml</code>	Applies a configuration to an object by filename or stdin.
11	<code>kubectl logs -f <pod_name></code>	Prints the logs for a pod and it will continuously stream the logs as new log entries that are generated in real-time. This is useful for monitoring and troubleshooting applications running in Kubernetes pods..

Command Line Cheat Sheet Table (continued)

S. No.	Command	Purpose
12	<code>kubectl logs -c <container_name> <pod_name></code>	Prints the logs from a specific container within a pod in a Kubernetes cluster.
13	<code>kubectl logs <pod_name> pod.log</code>	Redirects and saves the logs from a specific pod in a Kubernetes cluster to a file named 'pod.log'.

FAQ

1. How to configure HA ?

- You can configure HA by increasing the number of pods running, By default this is set to one.
- "certOrchestrator.replicaCount" field needs to be overridden in the deployment.
- Can use `--set` flag to override the same as below using helm
 - `--set certOrchestrator.replicaCount=2` (example to increase the number of pods to two)
- Always only one pod will be a leader, other pods will be non-leader, when the leader is down, an election will happen to elect the leader among the existing non-leader + new pod (created due to the kill of old leader), based on the election one of the pod will become Leader.

2. How to check if your pod is up and running ?How to configure monitoring for your pod running in a cluster?

You can monitor the pod livenessProbe under the below path from the cert-orchestrator pod

path: /healthz

port: 8081

3. How to add tolerations to the deployment pod?

Tolerations can be overridden using helm, Pl refer the helm chart configuration.

4. What is the permission to be allowed in the cluster for running your pod?

- cert-orchestrator
 - configmaps
- create, get
 - namespaces
 - get, list
- nodes
 - get, list, watch
- pods
 - get, list
- secrets
 - create, delete, get, list, patch, update, watch
- cert-orchestrator.certplus.appviewx:casettingclusters
 - create, delete, get, list, patch, update, watch
- cert-orchestrator.certplus.appviewx:casettingclusters/status
 - get, patch, update
- cert-orchestrator.certplus.appviewx:casettings
 - create, delete, get, list, patch, update, watch
- cert-orchestrator.certplus.appviewx:casettings/status
 - get, patch, update
- cert-orchestrator.certplus.appviewx:certreqs
 - create, delete, get, list, patch, update, watch
- cert-orchestrator.certplus.appviewx:certreqs/status
 - get, patch, update

- cert-orchestrator.certplus.appviewx:certs
 - create, delete, get, list, patch, update, watch
- cert-orchestrator.certplus.appviewx:certs/finalizers
 - update
- cert-orchestrator.certplus.appviewx:certs/status
 - get, patch, update
- cert-orchestrator.certplus.appviewx:discoveryrequests
 - create, delete, get, list, patch, update watch
- cert-orchestrator.certplus.appviewx:discoveryrequests/finalizers
 - update
- cert-orchestrator.certplus.appviewx:discoveryrequests/status
 - get, patch, update
- cert-orchestrator.certplus.appviewx:renewaljobs
 - create, delete, get, list, patch, update, watch
- cert-orchestrator.certplus.appviewx:renewaljobs/status
 - get, patch, update
- cert-orchestrator.certplus.appviewx:signers
 - create, delete, get, list, patch, update, watch
- cert-orchestrator.certplus.appviewx:signers/finalizers
 - update
- cert-orchestrator.certplus.appviewx:signers/status
 - get, patch, update
- certificates.k8s.io:certificatesigningrequests

- get, list, patch, update, watch
- certificates.k8s.io:certificatesigningrequests/status
 - get, patch, update
- certificates.k8s.io:[SIGNER_NAME]/istio:signers
 - sign
- coordination.k8s.io:leases
 - create, delete, get, list, update, watch
- events
 - create, patch
- networking.k8s.io:ingresses
 - get, list, watch
- secrets-store.csi.x-k8s.io:secretproviderclasses
 - create, delete, get, list, patch, update, watch
- secrets-store.csi.x-k8s.io:secretproviderclasses/finalizers
 - update
- secrets-store.csi.x-k8s.io:secretproviderclasses/status
 - get, patch, update
- appviewx-infra-orchestrator
 - cert-orchestrator.certplus.appviewx:discoveryrequests
 - create, get
- appviewx-csi-provider
 - serviceaccounts/token
 - create

- secrets
 - create, get
- cert-orchestrator.certplus.appviewx:certs
 - create, get

5. Whats is the permission given for SA (cluster role and cluster role binding)?

Refer to the answer provided for the previous question.

6. How to configure resource requirements?

Refer to the helm chart configuration under `certOrchestrator.resources`.

cert-orchestrator : Helm chart configuration parameters

Qualifier	Parameter	Definition	Allowed Values
<code>certOrchestrator</code>	<code>enabled</code>	Enable <code>certOrchestrator</code> .	true / false
	<code>renewalEnabled</code>	Enable renewal.	true / false
	<code>namespace</code>	Namespace for the <code>cert-orchestrator</code> installation.	Valid namespace name
<code>certOrchestrator.discovery</code>	<code>enabled</code>	Enable Discovery	true / false
	<code>isGroupAutoGenerate</code>	Allow auto group creation at AppViewX.	true / false
	<code>credentialSecretName</code>	Secret with credentials to be used for Discovery with AppViewX.	Valid Secret Name
	<code>credentialSecretNamespace</code>	Namespace for the above.	Valid namespace Name
<code>certOrchestrator.global</code>	<code>logLevel</code>	Log level for the <code>cert-orchestrator</code> terminal log.	0 to 7

Qualifier	Parameter	Definition	Allowed Values
	clusterName	Name of the cluster for the current installation.	Valid Cluster Name
	k8sVendor	Type of vendor where the cert-orchestrator runs.	Valid vendor Name
certOrchestrator.image	repository	Repository name for the image	Valid image name with repo
	tag	tag for the image	Valid image tag
	pullPolicy	Image Pull Policy	Always, Never or IfNotPresent. Defaults to IfNotPresent
certOrchestrator.resources	limits.cpu	Describes the maximum amount of CPU allowed.	Default is 1000m, See Kubernetes - meaning of CPU
	limits.memory	Describes the maximum amount of Memory allowed.	Default is 1Gi. see Kubernetes - meaning of Memory
certOrchestrator.resources	requests.cpu	Describes the minimum amount of CPU required.	Default is 500m, see Kubernetes - meaning of CPU
	requests.memory	Describes the minimum amount of Memory required.	Default is 500Mi. See Kubernetes - meaning of Memory
certOrchestrator	tolerations	Describes the tolerations allowed for the pods to schedule.	

appviewx-csi-provider : Helm chart configuration parameters

Qualifier	Parameter	Definition	Allowed Values
appviewxCsiProvider	enabled	Enable appviewxCsiProvider.	true / false

Qualifier	Parameter	Definition	Allowed Values
appviewxCsiProvider.image	repository	Repository name for the image.	Valid image name with repo.
	tag	Tag for the image.	Valid image tag
	pullPolicy	Image Pull Policy	Always, Never or IfNotPresent. Defaults to IfNotPresent
certOrchestrator	tolerations	Describes the tolerations allowed for the pods to schedule.	

appviewx-signer : Helm chart configuration parameters

Qualifier	Parameter	Definition	Allowed Values
appviewxSigner	enabled	Enable appviewxSigner.	true / false

appviewx-infra-orchestrator : Helm chart configuration parameters

Qualifier	Parameter	Definition	Allowed Values
appviewxInfraOrchestrator	enabled	Enable certOrchestrator.	true / false
	tick	Sync frequency for the certificate scan.	Valid time period string. Example : "60m"
appviewxInfraOrchestrator.image	repository	Repository name for the image.	Valid image name with repo
	tag	Tag for the image.	Valid image tag
	pullPolicy	Image Pull Policy	Always, Never or IfNotPresent. Defaults to IfNotPresent
appviewxInfraOrchestrator	tolerations	Describes the tolerations allowed for the pods to schedule.	

Chapter 2: KUBE+ API Guide

This guide provides information on the APIs to use for managing certificates within Kubernetes cluster.

API Reference

This applies only to AppViewX customers. To try the AppViewX exposed APIs on Swagger, follow these steps:

1. From the top right corner of your screen, click  (**API Reference**) icon.



Note: The **API Reference** icon is displayed for the Admin user and users with ACF permission enabled for API Reference.


You will be redirected to **AppViewX API Reference** page.

2. Click the required API to **Try it out**.

Enable ACF Permission for API Reference

To enable the ACF permission for non-admin roles to access the API reference, follow these steps:

1. Go to **Platform** module **IDENTITY > Role > Authorized functions**.
2. In the **Authorized functions** section, expand the **Platform**, by clicking the  icon.
3. To assign **API Reference**, select the checkbox beside **API Reference**.

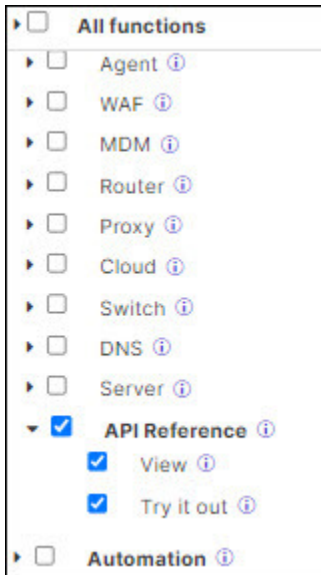

4. Click **Save**.

Best Practices for Working with the AppViewX API

- **Use appropriate HTTP methods.**

Ensure that the correct HTTP method is used for each operation (e.g., GET for retrieval, POST for creation).

- **Handle errors gracefully.**

Implement proper error handling in your application to manage API responses.

- **Use secure storage.**

Store access tokens securely and avoid hardcoding them in your application code.

- **Implement pagination.**

For endpoints that return large datasets, implement pagination using limit and offset parameters.

- [Understanding the AppViewX KUBE+ API](#)
- [Authentication using a User Account](#)
- [Authentication using a Service Account](#)
- [Onboard a Cluster](#)
- [Generated Cluster Onboarding Command Using Service Account](#)
- [Get Secret YAML Using Service Account Configured in AppViewX](#)
- [Manage Clusters](#)

- [Unmanage Clusters](#)
- [Issuer CA Create - Deprecated](#)
- [Cluster Policy Template Create](#)
- [Map Cluster to Issuer CA - Deprecated](#)
- [Map Cluster Policy to Use Legacy CA Setting](#)
- [Map Cluster Policy Using Policy Central](#)
- [Push Issuer CA to Target Cluster - Deprecated](#)
- [Push Cluster Policy Mapping to Legacy CA Setting](#)
- [Push Cluster Policy Mapping to Policy Central CA Setting](#)
- [Revoke Issuer CA from Target Cluster](#)
- [Revoke Cluster Policy Mapping from Legacy CA Setting](#)
- [Revoke Cluster Policy Mapping from Policy Central CA Setting](#)
- [Delete Cluster Policy Mapping from Legacy CA Setting](#)
- [Delete Cluster Policy Mapping from Policy Central CA Setting](#)
- [Create Cert CRD Instance in Cluster](#)
- [Get CA Settings YAML](#)
- [Enroll Certificate to K8s Secret](#)
- [Push Create Certificate to the End Cluster](#)
- [TrustStore Content Download](#)
- [Save TrustStore Template](#)
- [Push TrustStore Bundle to Cluster](#)
- [Revoke TrustStore Bundle](#)
- [Delete TrustStore Bundle](#)
- [Create TrustStore Bundle](#)
- [Delete TrustStore Template](#)

Understanding the AppViewX KUBE+ API

The AppViewX API is a programmatic way to get data in and out of the AppViewX subsystems. With access to RESTful AppViewX APIs, you can leverage the raw potential of AppViewX. It provides a powerful way to channel the data into native business applications. This document comprises of module-wise APIs used in AppViewX.

RESTful HTTPS Requests

Type	Description
GET	GET requests, retrieve resource representation/information only and not to modify it.
POST	POST APIs create new subordinate resources. For example, a file is subordinate to a directory containing it or a row is subordinate to a database table. In terms of REST, POST methods are used to create a new resource into the collection of resources.
PUT	PUT APIs are used to update existing resources (if a resource does not exist then API may decide whether to create a new resource or not).
DELETE	DELETE APIs are used to delete resources (identified by the Request-URI).

Requests

Each endpoint URL is built in the same way by the following structure:

```
http://<IP/HostName/TenantName>:<GWPORT>/avxapi/<Endpoint>?<gwsource>
```

The following section provides an explanation of each component of the sample URL structure used in API requests. For quick reference, this section is referenced in all the API topics as **Reference** in this guide.

Understanding the sample URL: This section provides an explanation of each component of the sample URL structure used in API requests. For quick reference, this section is referenced in all the API topics as **Reference** in this guide.

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsource:** Source or origin of a gateway, for example: **external**.

Request Structure

All endpoints accept a request structure that should consist of JSON formatted data. To ensure the request is accepted, set the header **Content-Type: application/json**.

The following example shows a request to add a resource:

```
{
  "payload": {
    "name": "resource_1",
    "description": "This is a sample resource."
  }
}
```

Response Structure

The Content-Type of the response is typically determined by the Content-Type header, and for most endpoints, it will be application/json. All requests that reach the server, regardless of the response code, will retrieve a response body. A successful request will contain a body with the requested information, for example:

```
https://appviewxapi.com/avxapi/resource?gwsource=external
```

Returns the following JSON structure that a resource is added:

```
{
  "response": "Resource added successfully",
  "message": "Resource added successfully",
}
```



```

"appStatusCode": null,
"tags": null,
"headers": null
}

```

Description of Server Responses

HTTP Code	Response Message
200 OK	The request was successful (some API calls may return 201 or 202 instead).
400 Bad Request	The request is not understood or required parameters are missing.
401 Unauthorized	Authentication failed or the user doesn't have permissions for the requested operation.
409 Forbidden	Access denied.
404 Not Found	Resource not found.
429 Too many requests	The number of requests to the service has crossed the threshold.
503 Service unavailable	The client cannot communicate with the service.
504 Gateway timeout	The given request has exceeded the expected time.

URI Scheme

- **Host** : {url}
- **BasePath** : /avxapi
- **Schemes** : HTTPS
- **URL** : https://{url}/avxapi

Types of Accounts in AppViewX

There are two types of accounts in AppViewX:

- **User Accounts**: These are used by actual users.
- **Service Accounts**: These are used by system services such as web servers, automation tools, and so on.

AppViewX recommends using a Service Account for accessing APIs from automation tools. Service Accounts are supported with OAuth standard for a more secure and standard way of accessing APIs.



Note: AppViewX supports both User Account and Service Account for accessing APIs.

Authentication using a User Account

For accessing APIs, you can login via two types of accounts:

- User account

A **user account** represents an individual person interacting with the application or the system. User accounts are used for accessing the system on behalf of a user.

For accessing APIs with a user account, you need to get the session ID by providing a username and password in the login API. This session ID can then be used for accessing other APIs.



Note: You can also use the username and password in all API calls instead of the sessionId. However, this is not recommended.

- Service account

A **service account** represents a non-human entity such as an application or a service. It is used for automated processes or system-to-system interactions without human intervention.

For accessing APIs with a service account, you need to get the Access Token by providing Client ID and Client Secret in get-service-token API. This Access Token can then be used for accessing other APIs.



Note: Access Token Validity is 30 minutes by default and it can be configured in **Settings > Authentication > OAuth Settings**.

For accessing APIs with a user account, the subsequent sections will help you with instructions to:

- [Retrieve session ID using login API](#)
- [Using Session ID for further API calls](#)

Retrieve session ID using login API

This API used to retrieve the session ID using the login API for secure authentication and access to system resources.

Before you begin

- Make sure you have valid login credentials (Username and Password) for accessing the system.
- You cannot use OAuth credentials (Client ID and Client Secret) for login.
- To access the APIs using the service token, use the [API with the Service Account](#).

Request Structure

Endpoint	/login
Type	POST
Sample URL	https://<IP/HostName/TenantName>:<GWPORT>/avxapi/login?&gwsource=external To understand the elements of the sample URL, click here .
Headers	
Content-Type	application/json
Request timeout period	15 minutes

Input Parameters

Description	
username	(Mandatory) User login name of the user.
Header	Type: String Example: "admin"
password	(Mandatory) Password for the username.
Header	Type: String Example: "Password@123"

Input Parameters (continued)

	Description
otp Header	(Mandatory only if MFA is enabled) If MFA is enabled, enter the OTP received on your registered email ID in the header. Multifactor authentication (MFA) is a security mechanism that requires users to provide two or more verification factors to gain access to a resource If MFA is enabled, and you try to login with only the username and password, you will get the following error upon execution of the API: MFA is enabled. We have sent an OTP to your email ID: aaa*****r@appviewx.com. In this case, ensure that the OTP is included in the header and try logging in again. Type: String Example: "OTP : 609700"
Content-Type Header	(Mandatory) The parameter should be set to <code>application/json</code> to specify the nature of the data in the payload. Type: String Example: "application/json"
gwsources Query	(Mandatory) Source from which the request is triggered. The values can be: • web • external Type: String

Response Structure

- **Status Code:** 200 Ok
- **Message:** Login Successful
- **Headers:**
 - **Content-Type:** application/json

Response Parameters

Name	Description
response	The response contains the attributes needed to retrieve the session ID.
message	Success message or failure description in case of error.
appStatusCode	Application specific status code for the response. Will be non-null for failure response.
tags	More info in case of failure response.

Name	Description
status	Indicates the overall status of the response. The values can be: • SUCCESS • FAILURE
appStatusCode	An application-specific status code, if applicable.
statusDescription	Description of the status, if available.
sessionId	Unique identifier for the session.
lockDownPeriod	Number of login attempts remaining.
termsAccepted	
passwordExpiryMsg	
emailId	

Status Codes

HTTP Code	appStatusCode	Response Message
200 OK	NA	Login successful
400 Bad request	ACCT_AUTH_001	Username or password cannot be null or empty.
401 Unauthorized	ACC_AUTH_022	Login failed. Invalid credentials.
401 Unauthorized	ACC_AUTH_006	Login failed. Invalid credentials.

Sample Request/Response

Use Case

Log in to the application with a username and password.

Sample Request URL

```
https://<IP/HostName/TenantName>:<GWPORT>/avxapi/login?&gwsouce=external
```

Request Payload

```
{}
```

Sample Response

```
{
  "response": {
    "status": "SUCCESS",
    "appStatusCode": null,
    "statusDescription": null,
    "sessionId": "avx--c73a4f56-f4ab-4cdf-aadf-6d90bf406077",
    "authCode": null,
    "lockDownPeriod": 15,
    "emailId": null,
    "termsAccepted": true,
    "passwordExpiryMsg": ""
  },
  "message": "Login successful.",
  "appStatusCode": null,
  "tags": null,
  "headers": null
}
```

Reference

Understanding the sample URL: This section provides an explanation of each component of the sample URL structure used in API requests. For quick reference, this section is referenced in all the API topics as **Reference** in this guide.

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.

- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsources:** Source or origin of a gateway, for example: **external**.

What can you do next?

After the sessionID is retrieved using the login API, you can now [use the session ID for API calls](#).

Using Session ID for further API calls

The sessionID retrieved using the login API can be used in the header for making further API calls.

In this section, as an example, we are using the session ID with the API call for managing a cluster.

Before you begin

- Session ID is obtained from the login API.
- Ensure that the session ID is valid and has not expired.

Request Structure

Endpoint:	/kube-manage-cluster
Type:	PUT
Sample URL:	<pre>https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-manage-cluster?gwsource=external</pre> To understand the elements of the sample URL, click here.
Headers	
Content-Type:	application/json

Input Parameters

Name	Description
sessionId	(Mandatory) Session Id received after login.
<i>Header</i>	Type: String Constraint: Required if username and password are not provided.
userName	(Mandatory only if sessionId is not provided) Username that is configured in AppViewX.
<i>Header</i>	Type: String
password	(Mandatory only if sessionId is not provided) Password of that user.
<i>Header</i>	Type: String
content-type	(Mandatory) Payload content-type with application/json value.
<i>Header</i>	Type: String Constraint: The value must be application/json .
gwkey	(Mandatory) Tenant Key. This is required only for multi-tenant installations and can be disregarded for other types of installations.
<i>Query</i>	Type: String
gwsource	(Mandatory) The source from which the request is triggered, e.g., external.

Input Parameters (continued)

Name	Description
<i>Query</i>	Type: String
Payload	Contains all the parameters to be sent in the request body for the put request.
<i>Body</i>	Type: Payload

Payload**Input Parameter**

Name	Description
clusterName	List of cluster names available in the inventory that needs to be manged.
<i>List<String></i>	

Response Structure

Name	Description
response	The response contains the unmanage state of the cluster.
<i>String</i>	
message	Success message or failure description in case of error.
<i>String</i>	
appStatusCode	Application specific status code for the response. Will be non-null for failure response.
<i>String</i>	
tags	More info in case of failure response.

Sample Request/Response

Use case: Manage a cluster.

Request URL

<https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-manage-cluster?gwsource=kube>

Sample Request

POST Content type: application/json Username: <> Password: <>

```
{
  "payload": {
    "clusterNames": [
      "casetting-cluster-appviewx-ca-server-ud-gp"
    ]
  }
}
```

Sample Response

```
{
  "response": null,
  "message": "Clusters are Managed",
  "appStatusCode": "success",
  "tags": null,
  "headers": null
}
```

Reference

Understanding the sample URL: This section provides an explanation of each component of the sample URL structure used in API requests. For quick reference, this section is referenced in all the API topics as **Reference** in this guide.

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.

- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT**: AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi**: Path parameter value (static) that is part of the endpoint's URL
- **Endpoint**: Endpoint of the API, for example: **execute-hook**
- **gwsources**: Source or origin of a gateway, for example: **external**.

Authentication using a Service Account

For accessing APIs, you can login via two types of accounts:

- User account

A **user account** represents an individual person interacting with the application or the system. User accounts are used for accessing the system on behalf of a user.

For accessing APIs with a user account, you need to get the session ID by providing a username and password in the login API. This session ID can then be used for accessing other APIs.



Note: You can also use the username and password in all API calls instead of the sessionId. However, this is not recommended.

- Service account

A **service account** represents a non-human entity such as an application or a service. It is used for automated processes or system-to-system interactions without human intervention.

For accessing APIs with a service account, you need to get the Access Token by providing Client ID and Client Secret in get-service-token API. This Access Token can then be used for accessing other APIs.



Note: Access Token Validity is 30 minutes by default and it can be configured in **Settings > Authentication > OAuth Settings**.

For accessing APIs with a service account, the subsequent sections will help you with instructions to:

- Retrieve Access Token using get-service-token API
- Using Access Token in the header for further API calls

Retrieve Access Token using get-service-token API

The API provides a streamlined process for retrieving service tokens related to account management tasks.

Before you begin

- Make sure you have valid login credentials for accessing the system.

Request Structure

Endpoint:	/acctmgmt-get-service-token
Type:	POST
Sample URL:	https://<IP/HostName/TenantName>:<GWPORT>/avxapi/acctmgmt-get-service-token?gwsource=external To understand the elements of the sample URL, click here .
Headers:	
Content-Type:	application/json
Authentication:	Yes
Request timeout period	15 minutes

Input Parameters

Description	
Authorization <i>Header</i>	(Mandatory) Please form a string in this format <Client ID>:<Client Secret> and do base64 encoding. Then prepend a key 'Basic' before the encoded value. Final value should be "Basic <EncodedValue>". Type: <i>String</i> Example: "admin"

Input Parameters (continued)

Description	
Content-Type <i>Header</i>	(Mandatory) The parameter should be set to <code>application/json</code> to specify the nature of the data in the payload. Type: <i>String</i> Example: "application/json"
grant_type <i>Payload</i>	(Mandatory) Payload Type should be "Form". The value of the param should be "Client_Credentials". Type: <i>Text</i>

Response Structure

- **Status Code:** 200 Ok
- **Message:** Successful
- **Headers:**
 - **Content-Type:** application/json

Response Parameters

Name	Description
response	The response contains the attributes needed to retrieve the access token.
message	Success message or failure description in case of error.
appStatusCode	Application specific status code for the response. Will be non-null for failure response.
tags	More info in case of failure response.

Status Codes

HTTP Code	appStatusCode	Response Message
200 OK	NA	Successful

HTTP Code	appStatusCode	Response Message
400 Bad request	ACCT_SA_003	Service account is invalid/not found::[Service account not found in the database]
400 Bad request	OAUTH_CLNT_015	Client Password is incorrect::[Invalid Client credential]
400 Bad request	ACCT_SA_001	Invalid Request::[Invalid client Id or secret]
500 Internal Server Error	avx-common-011	Error while processing.

Sample Request/Response

Use Case

Retrieve Access Token.

Request URL

https://<IP/HostName/TenantName>:<GWPORT>/avxapi/acctmgmt-get-service-token?gwsorce=external

Content-Type: application/x-www-form-urlencoded

Authorization: Basic

NTIxYzNhZDItZWE0ZS00NDdiLWE1MWItOTYyMWJiN2VhMTI2OjU1QVUjTk84JSpaGd2TmZhWVtdHZYMGRrRWVhZ

Request Payload

BODY ⓘ ⓘ Form ▾

☒ grant_type [Text ▾] = client_credentials ×

+ Add form parameter ☒ application/x-www-form-urlencoded ▾ 🗑

Sample Response

```
{
  "response":
    "eyJ0eXAiOiJKV1QiLCJhbGciOiJIUzI1NiJ9.eyJzdWIiOiJwbGF0Zm9ybSIsImF1ZCI6ImF2eCIsImNsaVVudElkIjoIOTcwNzRlNDetOGFmOS00NTZkLTlhNjQtZjBjNGJiOTAtMDQ0ZiIiwiaXNzIjoieXZ4IiwiaXhwIjojNjUwMzY5MzY3LCJncmFudCB0eXBlljoiY2xpZW50X2NyZWRIbnRpYWxzIn0.HZnkuUEjXleqJWqpqnWFWHqID7GYf4cWx6VwbjGD_0",
  "message": null,
  "appStatusCode": null,
  "tags": {}
}
```

```
"headers": null
}
```

Reference

Understanding the sample URL: This section provides an explanation of each component of the sample URL structure used in API requests. For quick reference, this section is referenced in all the API topics as **Reference** in this guide.

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsouce:** Source or origin of a gateway, for example: **external**.

Using Access Token in the header for further API calls

The access token retrieved using the get-service-token API can be used in the header for making further API calls.

In this section, as an example, we are using the access token with the API call for managing a cluster.

Before you begin

- Access Token is obtained from the get-service-token API.
- Ensure that the Access Token is valid and has not expired.

Request Structure

Endpoint:	kube-manage-cluster
Type:	POST
Sample URL:	https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-manage-cluster?gwsource=external To understand the elements of the sample URL, click here .
Headers:	
Content-Type:	application/json

Input Parameters

Name	Description
Token	(Mandatory) Use token retrieved from login API.
<i>Header</i>	Type: <i>String</i> Example: eyJ0eXAiOiJKV1QiLCJhbGciOiJIUzI1NiJ9.eyJzdWliOiJwbGF0Zm9yYyBzImlmF1ZCI6ImF2eCIsImNsaWVudElkIjoiaOTcwNzRlNDk0OGFmOS00NTZkLTlhNjQtZjBjNGJiOTA4MDQ4IiwiaXNzIjoiaYXZ4IiwiaXNzIjoxNjUwMzY5MzY3LCJncmFudCB0eXBlljoiY2xpZW50X2NyZWRIbnRpYWxzIn0.HZnkuUEjXleqJWqpqiNWFHqIDI7GYf4cWx 6VwbjGD_0
gwsource	(Mandatory) Source from which the request is triggered. The values can be:
<i>Query</i>	• web • external Type: <i>String</i>
Payload	(Mandatory) Input data for request body in application/json format. For payload details, see Payload section.
<i>String</i>	

Payload

Input Parameter

Name	Description
clusterName	List of cluster names available in the inventory that needs to be manged.
<i>List<String></i>	

Response Structure

Name	Description
response	The response contains the unmanage state of the cluster.
<i>String</i>	
message	Success message or failure description in case of error.
<i>String</i>	
appStatusCode	Application specific status code for the response. Will be non-null for failure response.
<i>String</i>	
tags	More info in case of failure response.

Sample Request/Response

Use case: Manage a cluster.

Request URL

`https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-manage-cluster?gwsource=kube`

Sample Request

POST Content type: application/json Username: <> Password: <>

```
{
  "payload": {
    "clusterNames": [
      "casetting-cluster-appviewx-ca-server-ud-gp"
    ]
  }
}
```

Sample Response

```
{
  "response": null,
  "message": "Clusters are Managed",
  "appStatusCode": "success",
  "tags": null,
  "headers": null
}
```

Reference

Understanding the sample URL: This section provides an explanation of each component of the sample URL structure used in API requests. For quick reference, this section is referenced in all the API topics as **Reference** in this guide.

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.

- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsouce:** Source or origin of a gateway, for example: **external**.

Onboard a Cluster

This API is used to generate cluster onboarding helm command with limited services like discovering certificates from secrets and provisioning certificates to secrets.

Request Structure

Endpoint:	/kube-cluster-onboard
Type:	POST
Sample URL:	https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-cluster-onboard?gwsource=external To understand the elements of the sample URL, click here .
Headers:	
Content-Type:	application/json

Input Parameter

Name	Description
sessionId	(Mandatory) A unique identifier assigned to a user's session upon successful authentication. The session ID remains valid until it expires, and it can contain alphanumeric characters.
Header	Type: String Constraints: The session ID is used when username and password are not provided. Example: A1B2c3d4E5F6
gwsource	(Mandatory) Source from which the request is triggered.
Query	Type: String Example: DataCenterA
payload	(Mandatory) Input data for request body in application/json format. For payload details, see Payload section.
Body	

Payload

Input Parameter

Name	Description
clusterName <i>String</i>	(Mandatory) Name of the cluster used in helm install/ upgrade command it is the cert orchestrator name. It can contain alphanumeric characters. Example: appviewx-cluster
vendor <i>String</i>	(Mandatory) Name of the vendor where the cert orchestrator needs to run. It can contain alphanumeric characters. Possible Values: GKE, AKS, EKS, and Self-Managed.
connectivityURL <i>String</i>	(Mandatory) Type of the URL that can be either AppViewX URL or cloud connector machine URL. It can contain alphanumeric characters. Example: https://one.appviewx.com

Response Structure

- **Status Code:** 200 OK
- **Message:** Successful
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response <i>String</i>	Generated Helm commands for onboarding.
message <i>String</i>	Success message or failure description in case of error.
appStatusCode <i>String</i>	Application specific status code for the response. Will be non-null for failure response.
tags	More info in case of failure response.

Status Codes

Status Codes and Description

HTTP Status code	appStatusCode	Message and Possible remediation
200 OK	NA	Success
400 Bad Request	VALIDATION_ERROR_0004	Mandatory field is missing or invalid values specified - <<field name>> Possible remediation: Check and ensure that valid value is provided for <<field name>> field in the request.
401 Unauthorized	AVX_GW_003	Authentication failed, reason - Invalid Credentials Possible remediation: Ensure that valid username and password or valid sessionId is provided as the header param.

Sample Request/Response

Use case: Onboard a cluster using easy onboarding.

Request URL

`https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-cluster-onboard?gwsources=external`

Sample Request

POST Content type: application/json Username: <> Password: <>

```
{
  "payload": {
    "clusterName": "appviewx-cluster",
    "vendor": "Self-Managed",
    "connectivityURL": "https://one.appviewx.com"
  }
}
```

Sample Response

```
{
  "response": "#Create Namespace for Cert-Orchestrator plugin\n\nkubecti create ns crypto-mesh\n\nAdd Helm Repo\n\nhelm repo add kube-plus-repo\nhttps://charts.appviewx.com\n\nInstall Cert-Orchestrator Plugin\n\nhelm install crypto-mesh kube-plus-repo/crypto-mesh \\n--namespace crypto-mesh\n\\n--version v1.3.3 \\n--set certOrchestrator.global.clusterName=appviewx-cluster \\n--set certOrchestrator.global.k8sVendor=Self-Managed",
  "message": "Constructed install command of cert-orchestrator for easyOnboarding",
  "appStatusCode": "success"
}
```

Reference

Understanding the sample URL: This section provides an explanation of each component of the sample URL structure used in API requests. For quick reference, this section is referenced in all the API topics as **Reference** in this guide.

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsouce:** Source or origin of a gateway, for example: **external**.

What's Next

-

Generated Cluster Onboarding Command Using Service Account

This API is used to generate the cluster onboarding command using the provided service account and configuration details.

Request Structure

Endpoint:	/kube-cluster-onboard-oauth
Type:	POST
Sample URL:	https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-cluster-onboard-oauth?gwsource=external To understand the elements of the sample URL, click here .
Headers:	
Content-Type:	application/json

Input Parameter

Name	Description
sessionId	(Mandatory) A unique identifier assigned to a user's session upon successful authentication. The session ID remains valid until it expires, and it can contain alphanumeric characters.
Header	Type: String Constraints: The session ID is used when username and password are not provided. Example: A1B2c3d4E5F6
gwsource	(Mandatory) Source from which the request is triggered.
Query	Type: String Example: DataCenterA

Input Parameter (continued)

Name	Description
payload	(Mandatory) Input data for request body in application/json format. For payload details, see Payload section.
<i>Body</i>	

Payload**Input Parameter**

Name	Description
clusterName	(Mandatory) Unique name to identify the cluster and the cluster vendor. It can contain alphanumeric characters. (-) and (.) are allowed as special characters. Maximum length allowed is 60.
<i>String</i>	Example: <code>appviewx-cluster</code>
vendor	(Mandatory) Name of the vendor where the cert orchestrator needs to run. It can contain alphanumeric characters.
<i>String</i>	Possible Values: GKE, AKS, EKS, and Self-Managed.
connectivityURL	(Mandatory) Type of the URL that can be either AppViewX URL or cloud connector machine URL. It can contain alphanumeric characters.
<i>String</i>	Example: <code>https://one.appviewx.com</code>
serviceAccountName	(Mandatory) Type of the URL that can be either AppViewX URL or cloud connector machine URL. It can contain alphanumeric characters.
<i>String</i>	Example: <code>https://one.appviewx.com</code>
clusterNamespace	(Mandatory) Installation namespace. The values must not be blank.
<i>String</i>	
clusterServices	(Mandatory) Features to be enabled in the cert-orchestrator deployed in the cluster.
<i>List</i>	

Input Parameter (continued)

Name	Description
	Possible Values: • Provision Certificates to K8s Secrets • Discover Certificates • Provision Certificates to Ephemeral Volumes • Discover K8's Infra Certificates • Enable mTLS Certificates for Service Mesh
privatekeyDiscovery	(Optional) Enables private key discovery. The values can be: <i>Boolean</i> • true • false

Response Structure

- **Status Code:** 200 OK
- **Message:** Successful
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response <i>String</i>	Generated Helm commands for onboarding.
message <i>String</i>	Success message or failure description in case of error.
appStatusCode <i>String</i>	Application specific status code for the response. Will be non-null for failure response.
tags	More info in case of failure response.

Status Codes

Status Codes and Description

HTTP Status code	appStatusCode	Message and Possible remediation
200 OK	NA	Success
400 Bad Request	ACCT_SA_001	Mandatory field is missing or invalid values specified - <<field name>> Possible remediation: Check and ensure that valid value is provided for <<field name>> field in the request.
401 Unauthorized	AVX_GW_003	Authentication failed, reason - Invalid Credentials Possible remediation: Ensure that valid username and password or valid sessionId is provided as the header param.

Sample Request/Response

Use case: Onboard a cluster using service account

Request URL

`https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-cluster-onboard-oauth?gwsources=external`

Sample Request

POST Content type: application/json Username: <> Password: <>

```
{
  "payload": {
    "clusterName": "kubepius",
    "vendor": "Self-Managed",
    "connectivityURL": "https://appviewx-fqdn/",
    "serviceAccountName": "admin",
    "clusterNamespace": "crypto-mesh",
    "clusterServices": [
      "Provision Certificates to K8s Secrets",
      "Provision Certificates to Ephemeral Volumes",
      "Discover Certificates",
      "Discover K8s Infra Certificates",
    ]
  }
}
```

```

    "Enable mTLS Certificates for Service Mesh"
  ],
  "privatekeyDiscovery": true
}
}

```

Sample Response

```

{
  "response": "#Create Namespace for Cert-Orchestrator plugin\n\nkubect! create ns crypto-mesh\n\nAdd Helm Repo\n\nhelm repo add\n\nkube-plus-repo https://charts.appviewx.com\n\n#Create credentials to integrate Cert-Orchestrator with AppViewX.\n\nkubect! create secret generic\n\nappviewx-auth -n crypto-mesh --from-literal=APPVIEWX_ENV_USER_NAME=admin --from-literal=APPVIEWX_ENV_PASSWORD=[password]\n\n--from-literal=APPVIEWX_ENV_URL=https://appviewx-fqdn\n\n#Install Cert-Orchestrator Plugin\n\nhelm install crypto-mesh\n\nkube-plus-repo/crypto-mesh\n\n--namespace crypto-mesh\n\n--version v1.3.3\n\n--set certOrchestrator.global.clusterName=kubeplus\n\n--set certOrchestrator.global.k8sVendor=Self-Managed\n\n--set certOrchestrator.namespace=crypto-mesh\n\n--set\n\ncertOrchestrator.discovery.credentialSecretName=appviewx-auth\n\n--set certOrchestrator.discovery.credentialSecretNamespace=crypto-mesh\n\n--set appviewxInfraOrchestrator.enabled=True\n\n--set appviewxSigner.enabled=True\n\n--set appviewxCSPProvider.enabled=True\n\n--set certOrchestrator.discovery.enabled=True\n\n--set certOrchestrator.discovery.isGroupAutoGenerate=True\n\n--set\n\ncertOrchestrator.discovery.isPrivateKeyDiscovery=True",
  "message": "Constructed install command of cert-orchestrator for advanceOnboarding",
  "appStatusCode": "success"
}

```

Reference

Understanding the sample URL: This section provides an explanation of each component of the sample URL structure used in API requests. For quick reference, this section is referenced in all the API topics as **Reference** in this guide.

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsource:** Source or origin of a gateway, for example: **external**.

What's Next

- [Manage Clusters](#)

Get Secret YAML Using Service Account Configured in AppViewX

This API is used to generate a Kubernetes Secret YAML file using the service account configured in AppViewX.

Request Structure

Endpoint:	/kube-service-auth-secret
Type:	POST
Sample URL:	https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-service-auth-secret?gwsource=external To understand the elements of the sample URL, click here .
Headers:	
Content-Type:	application/json

Input Parameter

Name	Description
sessionId <i>Header</i>	(Mandatory) A unique identifier assigned to a user's session upon successful authentication. The session ID remains valid until it expires, and it can contain alphanumeric characters. Type: String Constraints: The session ID is used when username and password are not provided. Example: A1B2c3d4E5F6
gwsource <i>Query</i>	(Mandatory) Source from which the request is triggered. Type: String Example: DataCenterA
payload <i>Body</i>	(Mandatory) Input data for request body in application/json format. For payload details, see Payload section.

Payload**Input Parameter**

Name	Description
authenticationURL <i>String</i>	(Mandatory) This URL is referenced in the secret YAML content, and the orchestrator uses this URL to communicate with AppViewX.
serviceAccountName <i>String</i>	(Mandatory) Name of the service account.

Response Structure

- **Status Code:** 200 OK
- **Message:** Successful
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response <i>String</i>	Generate Secret YAML.
message <i>String</i>	Success message or failure description in case of error.
appStatusCode <i>String</i>	Application specific status code for the response. Will be non-null for failure response.
tags	More info in case of failure response.

Sample Request/Response

Use case: Generate command to generate or download the secret YAML file for onboarding.

Request URL

```
https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-service-auth-secret?gwsources=external
```

Sample Request

```
POST Content type: application/json Username: <> Password: <>

{
  "payload": {
    "authenticationURL": "https://pe-kube-apvx-n2.lab.appviewx.net:31443/",
    "serviceAccountName": "test"
  }
}
```

Sample Response

```
---
apiVersion: "v1"
kind: "Secret"
metadata:
  name: "appviewx-auth"
  namespace: "crypto-mesh"
type: "Opaque"
data:
  CLIENT_ID: "NGVJOWI4MjgtYWM4YS00OGE3LWJkNjgtMjViYTM0ZGQwOGJh"
```

```
CLIENT_SECRET: "ZXNNUDJTIUdvZm4yd2czazM5ekBKT1B0NIJOaWpmMEQ="
```

```
APPVIEWX_ENV_URL: "aHR0cHM6Ly9wZS1rdWJlLWFWdngtbjIubGFILmFwcHZpZXd4Lm5ldDozMTQ0My8="
```

Reference

Understanding the sample URL: This section provides an explanation of each component of the sample URL structure used in API requests. For quick reference, this section is referenced in all the API topics as **Reference** in this guide.

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsouce:** Source or origin of a gateway, for example: **external**.

What's Next

- [Manage Clusters](#)

Manage Clusters

This API is used to manage clusters that are in an unmanaged or pending approval state.

Request Structure

Endpoint:	/kube-manage-cluster
Type:	POST
Sample URL:	https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-manage-cluster?gwsource=kube To understand the elements of the sample URL, click here .
Headers:	
Content-Type:	application/json

Input Parameter

Name	Description
sessionId <i>Header</i>	(Mandatory) A unique identifier assigned to a user's session upon successful authentication. The session ID remains valid until it expires, and it can contain alphanumeric characters. Type: String Constraints: The session ID is used when username and password are not provided. Example: A1B2c3d4E5F6
gwsource <i>Query</i>	(Mandatory) Source from which the request is triggered. Type: String Example: DataCenterA
payload <i>Body</i>	(Mandatory) Input data for request body in application/json format. For payload details, see Payload section.

Payload

Input Parameter

Name	Description
clusterNames <i>List<String></i>	List of cluster names available in the inventory that needs to be managed.

Response Structure

- **Status Code:** 200 OK
- **Message:** Successful
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response <i>String</i>	Clusters Managed Successfully
message <i>String</i>	Success message or failure description in case of error.
appStatusCode <i>String</i>	Application specific status code for the response. Will be non-null for failure response.
tags	More info in case of failure response.

Status Codes

Status Codes and Description

HTTP Status code	appStatusCode	Message and Possible remediation
200 OK	NA	Success
400 Bad Request	AVX-VLDTN-001	Mandatory field is missing or invalid values specified - <<field name>> Possible remediation: Check and ensure that valid value is provided for <<field name>> field in the request.
401 Unauthorized	AVX_GW_003	Authentication failed, reason - Invalid Credentials Possible remediation: Ensure that valid username and password or valid sessionId is provided as the header param.

Sample Request/Response

Use case: Manage a cluster from unmanage state.

Request URL

`https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-manage-cluster?gwsource=kube`

Sample Request

POST Content type: application/json Username: <> Password: <>

```
{
  "payload": {
    "clusterNames": [
      "kubepius"
    ]
  }
}
```

Sample Response

```
{
  "message": "Clusters are Managed",
  "appStatusCode": "success"
}
```

Reference

Understanding the sample URL: This section provides an explanation of each component of the sample URL structure used in API requests. For quick reference, this section is referenced in all the API topics as **Reference** in this guide.

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsource:** Source or origin of a gateway, for example: **external**.

What's Next

- [Unmanage Clusters](#)

Unmanage Clusters

This API is used to unmanage clusters that are currently in a managed state.

Request Structure

Endpoint:	/kube-unmanage-cluster
Type:	POST
Sample URL:	https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-unmanage-cluster?gwsource=kube To understand the elements of the sample URL, click here .
Headers:	
Content-Type:	application/json

Input Parameter

Name	Description
sessionId	(Mandatory) A unique identifier assigned to a user's session upon successful authentication. The session ID remains valid until it expires, and it can contain alphanumeric characters.

Input Parameter (continued)

Name	Description
<i>Header</i> Type: String	
	Constraints: The session ID is used when username and password are not provided.
	Example: A1B2c3d4E5F6
gwsources	(Mandatory) Source from which the request is triggered.
<i>query</i> Type: String	
	Example: DataCenterA
payload	(Mandatory) Input data for request body in application/json format. For payload details, see Payload section.
<i>Body</i>	

Payload**Input Parameter**

Name	Description
clusterNames	List of cluster names available in the inventory that needs to be unmanaged.
<i>List<String></i>	

Response Structure

- **Status Code:** 200 OK
- **Message:** Successful
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response	Clusters Unmanaged Successfully
<i>String</i>	
message	Success message or failure description in case of error.

Name	Description
<i>String</i>	
appStatusCode	Application specific status code for the response. Will be non-null for failure response.
<i>String</i>	
tags	More info in case of failure response.

Status Codes

Status Codes and Description

HTTP Status code	appStatusCode	Message and Possible remediation
200 OK	NA	Success
400 Bad Request	AVX-VLDTN-001	Mandatory field is missing or invalid values specified - <<field name>> Possible remediation: Check and ensure that valid value is provided for <<field name>> field in the request.
401 Unauthorized	AVX_GW_003	Authentication failed, reason - Invalid Credentials Possible remediation: Ensure that valid username and password or valid sessionId is provided as the header param.

Sample Request/Response

Use case: Unmanage a cluster from managed state.

Request URL

<https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-unmanage-cluster?gwsource=kube>

Sample Request

```
POST Content type: application/json Username: <> Password: <>

{
  "payload": {
    "clusterNames": [
```

```

    "kubeplus"
  ]
}
}

```

Sample Response

```

{
  "message": "Clusters are Unmanaged",
  "appStatusCode": "success"
}

```

Reference

Understanding the sample URL: This section provides an explanation of each component of the sample URL structure used in API requests. For quick reference, this section is referenced in all the API topics as **Reference** in this guide.

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsouce:** Source or origin of a gateway, for example: **external**.

What's Next

- [Manage Clusters](#)

Issuer CA Create - Deprecated

This API is used to create issuer CA.

This API has been deprecated starting with v2024.2.1.0 release. While it remains available for backward compatibility, its usage is discouraged. Please transition to the [Cluster Policy Template Create](#) API at the earliest convenience to ensure continued support and access to the latest features.

- **Deprecated Since:**v2024.2.1.0
- **Recommended Alternative:**/kube-issuer-ca-template-add
- **Reason for Deprecation:** Enhanced APIs by introducing Policy Central support and enabling High Availability (HA) for Certificate Authority (CA) services.

Request Structure

Endpoint:	/execute-hook
Type:	POST
Sample URL:	https://<IP/HostName/TenantName>:<GWPORT>/avxapi/execute-hook?gwsource=external To understand the elements of the sample URL, click here .
Headers:	
Content-Type:	application/json

Input Parameter

Name	Description
sessionId	(Mandatory) A unique identifier assigned to a user's session upon successful authentication. The session ID remains valid until it expires, and it can contain alphanumeric characters.
Header	
Type:	String
Constraints:	The session ID is used when username and password are not provided.

Input Parameter (continued)

Name	Description
Example: A1B2c3d4E5F6	
gwsource	(Mandatory) Source from which the request is triggered.
Query	Type: String
Example: DataCenterA	
payload	(Mandatory) Input data for request body in application/json format. For payload details, see the following sections for each issuer CAs:
Body	• Amazon Private CA • AppViewX • Comodo Certificate Manager • DigiCert • DigiCert MPKI • EJBCA • Entrust • Entrust MPKI • GlobalSign • GlobalSignAtlas • GlobalSignMSSL • HashicorpVault • InCommon • Nexus • Trustwave • Microsoft Enterprise • Microsoft Standalone • Google • AppViewX PKIaaS • Amazon • GoDaddy • LetsEncrypt

Response Structure

- **Status Code:** 200 OK
- **Message:** Successful
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response <i>String</i>	Issuer CA created successfully
message <i>String</i>	Success message or failure description in case of error.
appStatusCode <i>String</i>	Application specific status code for the response. Will be non-null for failure response.
tags	More info in case of failure response.

Sample Request/Response

Use case: Onboard a cluster

Request URL

https://<IP/HostName/TenantName>:<GWPORT>/avxapi/execute-hook?gwsource=external

Sample Request

```
POST Content type: application/json Username: <> Password: <>

{
  "payload": {
    "clusterName": "appviewx-cluster",
    "vendor": "Self-Managed",
    "connectivityURL": "https://appviewx.com/"
  }
}
```

Sample Response

```
{
  "response": "#Create Namespace for Cert-Orchestrator plugin\n\nkubecti create ns crypto-mesh\n\nAdd Helm Repo\n\nhelm repo add kube-plus-repo\nhttps://charts.appviewx.com\n\n\nInstall Cert-Orchestrator Plugin\n\nhelm install crypto-mesh kube-plus-repo/crypto-mesh \\n--namespace crypto-mesh\n\\n--version v1.3 \\n--set certOrchestrator.global.clusterName=appviewx-cluster \\n--set certOrchestrator.global.k8sVendor=Self-Managed",
  "message": "Constructed install command of cert-orchestrator for easyOnboarding",
  "appStatusCode": "success",
  "tags": null,
  "headers": null
}
```

Reference

Understanding the sample URL: This section provides an explanation of each component of the sample URL structure used in API requests. For quick reference, this section is referenced in all the API topics as **Reference** in this guide.

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsouce:** Source or origin of a gateway, for example: **external**.

What's Next

- [Generate or Download the Secret YAML](#)
- [Issuer CA Create - Amazon Private CA](#)
- [Issuer CA Create - AppViewX CA](#)
- [Issuer CA Create - Comodo Certificate Manager CA](#)
- [Issuer CA Create - DigiCert CA](#)
- [Issuer CA Create - DigiCert MPKI CA](#)
- [Issuer CA Create - EJBCA CA](#)
- [Issuer CA Create - Entrust CA](#)
- [Issuer CA Create - Entrust MPKI CA](#)
- [Issuer CA Create - GlobalSign CA](#)
- [Issuer CA Create - GlobalSignAtlas CA](#)
- [Issuer CA Create - GlobalSignMSSL CA](#)
- [Issuer CA Create - HashicorpVault CA](#)
- [Issuer CA Create - InCommon CA](#)
- [Issuer CA Create - Nexus CA](#)
- [Issuer CA Create - Trustwave CA](#)
- [Issuer CA Create - Microsoft Enterprise CA](#)
- [Issuer CA Create - Microsoft Standalone CA](#)
- [Issuer CA Create - Google CA](#)
- [Issuer CA Create - AppViewX PKIaaS CA](#)
- [Issuer CA Create - Amazon CA](#)
- [Issuer CA Create - GoDaddy CA](#)
- [Issuer CA Create - LetsEncrypt CA](#)

Issuer CA Create - Amazon Private CA

Payload

Name	Description
kubeCaSettingName	Unique name to identify the KUBE CA setting configuration.

Name	Description
<i>String</i>	
clusterPolicy	Cluster policy to which the cluster is associated to
<i>String</i>	
caAccount	Account associated with the CA.
<i>String</i>	
certificateProfile	Type of certificate.
<i>String</i>	Possible Values: Server, Client
validityUnit	Validity of the certificate.
<i>String</i>	Possible Values: Days, Months, Years
casetting_type	Type of the CA setting type.
<i>String</i>	Possible Values: CA Setting, CA Setting Cluster
groupName	Name of group where certificate might be pushed to after creation.
<i>String</i>	
certificateAuthority	Name of the Certificate Authority being configured.
<i>String</i>	Possible Value: Amazon Private CA
amazonPrivateCaIssuer	Issuer for Amazon Private CA.
<i>String</i>	
amazonPrivateCaRegion	Region for the Amazon Private CA.
<i>String</i>	
enrollVia	Method of enrollment for the certificates.
<i>String</i>	Possible Values: PCA, ACM
validityUnitValue	Validity unit value associated with the validity unit.

Name	Description
<i>String</i>	

Response Structure

- **Status Code:** 200 OK
- **Message:** Successful
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response <i>String</i>	Issuer CA created successfully
message <i>String</i>	Success message or failure description in case of error.
appStatusCode <i>String</i>	Application specific status code for the response. Will be non-null for failure response.
tags	More info in case of failure response.

Sample Request/Response

Use case: Create an issuer CA for Amazon Private CA.

Request URL

`https://<IP/HostName/TenantName>:<GWPORT>/avxapi/execute-hook?gwsouce=external`

Sample Request

POST Content type: application/json Username: <> Password: <>

```
{
  "payload": {
    "hook": {
      "name": "Kube CA Settings"
    },
    "input": {
```

```

    "action": "add",
    "payload": {
      "kubeCaSettingName": "my_ca_setting",
      "clusterPolicy": "my_policy",
      "caAccount": "my_ca_account",
      "certificateProfile": "Server",
      "validityUnit": "Days",
      "casetting_type": "CA Setting",
      "groupName": "my_group",
      "certificateAuthority": "Amazon Private CA",
      "amazonPrivateCaIssuer": "my_issuer",
      "amazonPrivateCaRegion": "my_region",
      "enrollVia": "PCA",
      "validityUnitValue": 365,
    }
  }
}

```

Sample Response

```

{
  "response": {
    "status": "Success",
    "output": {
      "status": "Success",
      "response": "Issuer CA created successfully"
    },
    "type": "script"
  },
  "message": null,
  "appStatusCode": null,
  "tags": null,
  "headers": null
}

```

Reference

Understanding the sample URL:

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.

- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsouce:** Source or origin of a gateway, for example: **external**.

Issuer CA Create - AppViewX CA

Payload

Name	Description
kubeCaSettingName	Unique name to identify the KUBE CA setting configuration.
<i>String</i>	
clusterPolicy	Cluster policy to which the cluster is associated to
<i>String</i>	
caAccount	Account associated with the CA.
<i>String</i>	

Name	Description
certificateProfile	Type of certificate.
<i>String</i>	Possible Values: Server, Client
validityUnit	Validity of the certificate.
<i>String</i>	
casetting_type	Type of the CA setting type.
<i>String</i>	Possible Values: CA Setting, CA Setting Cluster
groupName	Name of group where certificate might be pushed to after creation.
<i>String</i>	
certificateAuthority	Name of the Certificate Authority being configured.
<i>String</i>	Possible Value: AppViewX
validityUnitValue	Validity unit value associated with the validity unit.
<i>String</i>	Possible Values: Days, Months, Years

Response Structure

- **Status Code:** 200 OK
- **Message:** Successful
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response	Issuer CA created successfully
<i>String</i>	
message	Success message or failure description in case of error.
<i>String</i>	
appStatusCode	Application specific status code for the response. Will be non-null for failure response.

Name	Description
<i>String</i>	
tags	More info in case of failure response.

Sample Request/Response

Use case: Create an issuer CA for AppViewX CA.

Request URL

https://<IP/HostName/TenantName>:<GWPORT>/avxapi/execute-hook?gwsource=external

Sample Request

```
POST Content type: application/json Username: <> Password: <>

{
  "payload": {
    "hook": {
      "name": "Kube CA Settings"
    },
    "input": {
      "action": "add",
      "payload": {
        "kubeCaSettingName": "my_ca_setting",
        "clusterPolicy": "my_policy",
        "caAccount": "my_ca_account",
        "certificateProfile": "Server",
        "casetting_type": "CA Setting",
        "groupName": "my_group",
        "certificateAuthority": "AppViewX",
        "validity_unit": "Days",
        "validity_unit_value": "365"
      }
    }
  }
}
```

Sample Response

```
{
  "response": {
    "status": "Success",
    "output": {
      "status": "Success",
      "response": "Issuer CA created successfully"
    },
    "type": "script"
  },
  "message": null,
  "appStatusCode": null,
  "tags": null,
  "headers": null
}
```

Reference

Understanding the sample URL:

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL

- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsouce:** Source or origin of a gateway, for example: **external**.

Issuer CA Create - Comodo Certificate Manager CA

Payload

Name	Description
kubeCaSettingName	Unique name to identify the KUBE CA setting configuration.
<i>String</i>	
clusterPolicy	Cluster policy to which the cluster is associated to
<i>String</i>	
caAccount	Account associated with the CA.
<i>String</i>	
certificateProfile	Type of certificate.
<i>String</i>	Possible Values: Server, Client
validityUnit	Validity of the certificate.
<i>String</i>	Possible Values: Days, Months, Years
casetting_type	Type of the CA setting type.
<i>String</i>	Possible Values: CA Setting, CA Setting Cluster
groupName	Name of group where certificate might be pushed to after creation.
<i>String</i>	
certificateAuthority	Name of the Certificate Authority being configured.
<i>String</i>	Possible Value: Comodo Certificate Manager
namespace	Namespace where the CA settings will be applied.

Name	Description
<i>String</i>	
validityUnitValue	Validity unit value associated with the validity unit.
<i>String</i>	
comodoCertificateType	Certificate type for Comodo based on the configurations in the CA policy.
<i>String</i>	

Response Structure

- **Status Code:** 200 OK
- **Message:** Successful
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response	Issuer CA created successfully
<i>String</i>	
message	Success message or failure description in case of error.
<i>String</i>	
appStatusCode	Application specific status code for the response. Will be non-null for failure response.
<i>String</i>	
tags	More info in case of failure response.

Sample Request/Response

Use case: Create an issuer CA for Comodo Certificate Manager CA.

Request URL

<https://<IP/HostName/TenantName>:<GWPORT>/avxapi/execute-hook?gwsouce=external>

Sample Request

POST Content type: application/json Username: <> Password: <>

```
{
  "payload": {
    "hook": {
      "name": "Kube CA Settings"
    },
    "input": {
      "action": "add",
      "payload": {
        "kubeCaSettingName": "my_ca_setting",
        "clusterPolicy": "my_policy",
        "caAccount": "my_ca_account",
        "certificateProfile": "Server",
        "casetting_type": "CA Setting",
        "groupName": "my_group",
        "certificateAuthority": "Comodo Certificate Manager",
        "validityUnit": "Days",
        "validityUnitValue": "365",
        "comodoCertificateType": "my_certificate_type"
      }
    }
  }
}
```

Sample Response

```
{
  "response": {
    "status": "Success",
    "output": {
      "status": "Success",
      "response": "Issuer CA created successfully"
    },
    "type": "script"
  },
  "message": null,
  "appStatusCode": null,
  "tags": null,
}
```

```
"headers": null
}
```

Reference

Understanding the sample URL:

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsouce:** Source or origin of a gateway, for example: **external**.

Issuer CA Create - DigiCert CA

Payload

Name	Description
kubeCaSettingName	Unique name to identify the KUBE CA setting configuration.
<i>String</i>	

Name	Description
clusterPolicy	Cluster policy to which the cluster is associated to
<i>String</i>	
caAccount	Account associated with the CA.
<i>String</i>	
certificateProfile	Type of certificate.
<i>String</i>	Possible Values: Server, Client
validityUnit	Validity of the certificate.
<i>String</i>	Possible Values: Days, Months, Years
casetting_type	Type of the CA setting type.
<i>String</i>	Possible Values: CA Setting, CA Setting Cluster
groupName	Name of group where certificate might be pushed to after creation.
<i>String</i>	
certificateAuthority	Name of the Certificate Authority being configured.
<i>String</i>	Possible Value: DigiCert
digicertDivision	Division of the DigiCert.
<i>String</i>	
digicertServerType	Server type of the DigiCert.
<i>String</i>	
digicertPaymentMethod	Payment method of the DigiCert.
<i>String</i>	
digicertCertificateType	Certificate type of the DigiCert.
<i>String</i>	

Name	Description
validityUnitValue	Validity unit value associated with the validity unit.
<i>String</i>	
digicertDivisionId	Certificate type for DigiCert.
<i>String</i>	

Response Structure

- **Status Code:** 200 OK
- **Message:** Successful
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response	Issuer CA created successfully
<i>String</i>	
message	Success message or failure description in case of error.
<i>String</i>	
appStatusCode	Application specific status code for the response. Will be non-null for failure response.
<i>String</i>	
tags	More info in case of failure response.

Sample Request/Response

Use case: Create an issuer CA for DigiCert CA.

Request URL

`https://<IP/HostName/TenantName>:<GWPORT>/avxapi/execute-hook?gwsources=external`

Sample Request

```
POST Content type: application/json Username: <> Password: <>
{
```



```

"payload": {
  "hook": {
    "name": "Kube CA Settings"
  },
  "input": {
    "action": "add",
    "payload": {
      "kubeCaSettingName": "my_ca_setting",
      "clusterPolicy": "my_policy",
      "caAccount": "my_ca_account",
      "certificateProfile": "Server",
      "validityUnit": "Days",
      "casetting_type": "CA Setting",
      "groupName": "my_group",
      "certificateAuthority": "DigiCert",
      "digicertDivision": "my_division",
      "digicertServerType": "my_server_type",
      "digicertPaymentMethod": "my_payment_method",
      "digicertCertificateType": "my_certificate_type",
      "validityUnitValue": "365",
      "digicertDivisionId": "my_division_id"
    }
  }
}

```

Sample Response

```

{
  "response": {
    "status": "Success",
    "output": {
      "status": "Success",
      "response": "Issuer CA created successfully"
    },
    "type": "script"
  },
  "message": null,

```

```

"appStatusCode": null,
"tags": null,
"headers": null
}

```

Reference

Understanding the sample URL:

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsouce:** Source or origin of a gateway, for example: **external**.

Issuer CA Create - DigiCert MPKI CA

Payload

Name	Description
kubeCaSettingName	Unique name to identify the KUBE CA setting configuration.

Name	Description
<i>String</i>	
clusterPolicy	Cluster policy to which the cluster is associated to.
<i>String</i>	
caAccount	Account associated with the CA.
<i>String</i>	
certificateProfile	Type of certificate.
<i>String</i>	Possible Values: Server, Client
validityUnit	Validity of the certificate.
<i>String</i>	Possible Values: Days, Months, Years
casetting_type	Type of the CA setting type.
<i>String</i>	Possible Values: CA Setting, CA Setting Cluster
groupName	Name of group where certificate might be pushed to after creation.
<i>String</i>	
certificateAuthority	Name of the Certificate Authority being configured.
<i>String</i>	Possible Value: DigiCert MPKI
digicertProfiles	Profile of the DigiCert MPKI.
<i>String</i>	
validityUnitValue	Validity unit value associated with the validity unit.
<i>String</i>	

Response Structure

- **Status Code:** 200 OK
- **Message:** Successful

- **Headers:**
 - **Content-Type:** application/json

Name	Description
response <i>String</i>	Issuer CA created successfully
message <i>String</i>	Success message or failure description in case of error.
appStatusCode <i>String</i>	Application specific status code for the response. Will be non-null for failure response.
tags	More info in case of failure response.

Sample Request/Response

Use case: Create an issuer CA for DigiCert MPKI CA.

Request URL

`https://<IP/HostName/TenantName>:<GWPORT>/avxapi/execute-hook?gwsource=external`

Sample Request

POST Content type: application/json Username: <> Password: <>

```
{
  "payload": {
    "hook": {
      "name": "Kube CA Settings"
    },
    "input": {
      "action": "add",
      "payload": {
        "kubeCaSettingName": "my_ca_setting",
        "clusterName": "my_cluster",
        "clusterPolicy": "my_policy",
        "caAccount": "my_ca_account",
        "certificateProfile": "Server",
        "validityUnit": "Days",
```

```

    "casetting_type": "CA Setting",
    "groupName": "my_group",
    "certificateAuthority": "DigiCert MPKI",
    "digicertProfiles": "my_profiles",
    "validityUnitValue": "365",
  }
}
}
}

```

Sample Response

```

{
  "response": {
    "status": "Success",
    "output": {
      "status": "Success",
      "response": "Issuer CA created successfully"
    },
    "type": "script"
  },
  "message": null,
  "appStatusCode": null,
  "tags": null,
  "headers": null
}

```

Reference

Understanding the sample URL:

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsource:** Source or origin of a gateway, for example: **external**.

Issuer CA Create - EJBCA CA

Payload

Name	Description
kubeCaSettingName	Unique name to identify the KUBE CA setting configuration.
String	
clusterPolicy	Cluster policy to which the cluster is associated to
String	
caAccount	Account associated with the CA.
String	
certificateProfile	Type of certificate.
String	Possible Values: Server, Client
validityUnit	Validity of the certificate.
String	Possible Values: Days, Months, Years
casetting_type	Type of the CA setting type.

Name	Description
<i>String</i>	Possible Values: CA Setting, CA Setting Cluster
groupName	Name of group where certificate might be pushed to after creation.
<i>String</i>	
certificateAuthority	Name of the Certificate Authority being configured.
<i>String</i>	Possible Value: EJBCA
ejbcaEndEntityProfile	EJBCA profile name based on the configurations in the CA policy.
<i>String</i>	
ejbcaIssuerCommonName	EJBCA common name based on the configurations in the CA policy.
<i>String</i>	
ejbcaCertificateProfileName	EJBCA certificate profile name based on the configurations in the CA policy.
<i>String</i>	

Response Structure

- **Status Code:** 200 OK
- **Message:** Successful
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response	Issuer CA created successfully
<i>String</i>	
message	Success message or failure description in case of error.
<i>String</i>	
appStatusCode	Application specific status code for the response. Will be non-null for failure response.

Name	Description
<i>String</i>	
tags	More info in case of failure response.

Sample Request/Response

Use case: Create an issuer CA for EJBCA CA.

Request URL

`https://<IP/HostName/TenantName>:<GWPORT>/avxapi/execute-hook?gwsource=external`

Sample Request

```
POST Content type: application/json Username: <> Password: <>

{
  "payload": {
    "hook": {
      "name": "Kube CA Settings"
    },
    "input": {
      "action": "add",
      "payload": {
        "kubeCaSettingName": "my_ca_setting",
        "clusterPolicy": "my_policy",
        "caAccount": "my_ca_account",
        "certificateProfile": "Server",
        "casetting_type": "CA Setting",
        "groupName": "my_group",
        "certificateAuthority": "Ejbca",
        "ejbcaEndEntityProfile": "my_end_entity_profile",
        "ejbcaIssuerCommonName": "my_issuer_common_name",
        "ejbcaCertificateProfileName": "my_certificate_profile_name",
        "ejbcaEndEntityUsername": "my-user"
      }
    }
  }
}
```

Sample Response


```
{
  "response": {
    "status": "Success",
    "output": {
      "status": "Success",
      "response": "Issuer CA created successfully"
    },
    "type": "script"
  },
  "message": null,
  "appStatusCode": null,
  "tags": null,
  "headers": null
}
```

Reference

Understanding the sample URL:

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL

- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsouce:** Source or origin of a gateway, for example: **external**.

Issuer CA Create - Entrust CA

Payload

Name	Description
kubeCaSettingName	Unique name to identify the KUBE CA setting configuration.
<i>String</i>	
clusterPolicy	Cluster policy to which the cluster is associated to
<i>String</i>	
caAccount	Account associated with the CA.
<i>String</i>	
certificateProfile	Type of certificate.
<i>String</i>	Possible Values: Server, Client
validityUnit	Validity of the certificate.
<i>String</i>	Possible Values: Days, Months, Years
casetting_type	Type of the CA setting type.
<i>String</i>	Possible Values: CA Setting, CA Setting Cluster
groupName	Name of group where certificate might be pushed to after creation.
<i>String</i>	
certificateAuthority	Name of the Certificate Authority being configured.
<i>String</i>	Possible Value: Entrust
entrustCertificateType	Entrust certificate type based on the configurations in the CA policy.

Name	Description
<i>String</i>	
entrustRequestorName	Entrust requester name based on the configurations in the CA policy.
<i>String</i>	
entrustRequesterEmail	Entrust requester email ID based on the configurations in the CA policy.
<i>String</i>	
entrustRequesterPhone	Entrust requester phone no. based on the configurations in the CA policy.
<i>String</i>	
entrustAdditionalEmails	Entrust additional email IDs based on the configurations in the CA policy.
<i>String</i>	
validityUnitValue	Validity unit value associated with the validity unit.
<i>String</i>	

Response Structure

- **Status Code:** 200 OK
- **Message:** Successful
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response	Issuer CA created successfully
<i>String</i>	
message	Success message or failure description in case of error.
<i>String</i>	
appStatusCode	Application specific status code for the response. Will be non-null for failure response.

Name	Description
<i>String</i>	
tags	More info in case of failure response.

Sample Request/Response

Use case: Create an issuer CA for Entrust CA.

Request URL

https://<IP/HostName/TenantName>:<GWPORT>/avxapi/execute-hook?gwsource=external

Sample Request

```
POST Content type: application/json Username: <> Password: <>

{
  "payload": {
    "hook": {
      "name": "Kube CA Settings"
    },
    "input": {
      "action": "add",
      "payload": {
        "kubeCaSettingName": "aaaxxxaaaxxx",
        "clusterPolicy": "cluster_policy-entrust_ca_caset_clu",
        "caAccount": "Entrust_Crypto_Mesh_CA",
        "certificateProfile": "Server",
        "validityUnit": "Days",
        "casetting_type": "CA Setting",
        "groupName": "CryptoMesh_Entrust_Group",
        "certificateAuthority": "Entrust",
        "entrustCertificateType": "Server",
        "entrustRequestorName":"akhil",
        "entrustRequesterEmail":"sdet@appviewx.com",
        "entrustRequesterPhone":"9121",
        "entrustAdditionalEmails":"AdditionalEmails@gmail",
        "validityUnitValue": "365"
      }
    }
  }
}
```

```

}
}

```

Sample Response

```

{
  "response": {
    "status": "Success",
    "output": {
      "status": "Success",
      "response": "Issuer CA created successfully"
    },
    "type": "script"
  },
  "message": null,
  "appStatusCode": null,
  "tags": null,
  "headers": null
}

```

Reference

Understanding the sample URL:

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi**: Path parameter value (static) that is part of the endpoint's URL
- **Endpoint**: Endpoint of the API, for example: **execute-hook**
- **gwsSource**: Source or origin of a gateway, for example: **external**.

Issuer CA Create - Entrust MPKI CA

Payload

Name	Description
kubeCaSettingName	Unique name to identify the KUBE CA setting configuration.
<i>String</i>	
clusterPolicy	Cluster policy to which the cluster is associated to
<i>String</i>	
caAccount	Account associated with the CA.
<i>String</i>	
certificateProfile	Type of certificate.
<i>String</i>	Possible Values: Server, Client
validityUnit	Validity of the certificate.
<i>String</i>	Possible Values: Days, Months, Years
casetting_type	Type of the CA setting type.
<i>String</i>	Possible Values: CA Setting, CA Setting Cluster
groupName	Name of group where certificate might be pushed to after creation.
<i>String</i>	

Name	Description
certificateAuthority	Name of the Certificate Authority being configured.
<i>String</i>	Possible Value: Entrust MPKI
entrustmpkiCaName	Entrust MPKI CA name based on the configurations in the CA policy.
<i>String</i>	
entrustmpkiCertProfiles	Entrust MPKI certificate profile based on the configurations in the CA policy.
<i>String</i>	

Response Structure

- **Status Code:** 200 OK
- **Message:** Successful
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response	Issuer CA created successfully
<i>String</i>	
message	Success message or failure description in case of error.
<i>String</i>	
appStatusCode	Application specific status code for the response. Will be non-null for failure response.
<i>String</i>	
tags	More info in case of failure response.

Sample Request/Response

Use case: Create an issuer CA for Entrust MPKI CA.

Request URL

`https://<IP/HostName/TenantName>:<GWPORT>/avxapi/execute-hook?gwsouce=external`

Sample Request

POST Content type: application/json Username: <> Password: <>

```
{
  "payload": {
    "hook": {
      "name": "Kube CA Settings"
    },
    "input": {
      "action": "add",
      "payload": {
        "kubeCaSettingName": "my_ca_setting",
        "clusterPolicy": "my_policy",
        "caAccount": "my_ca_account",
        "certificateProfile": "Server",
        "validityUnit": "Days",
        "casetting_type": "CA Setting",
        "groupName": "my_group",
        "certificateAuthority": "Entrust MPKI",
        "entrustmpkiCaName": "my_ca_name",
        "entrustmpkiCertProfiles": "my_cert_profiles"
      }
    }
  }
}
```

Sample Response

```
{
  "response": {
    "status": "Success",
    "output": {
      "status": "Success",
      "response": "Issuer CA created successfully"
    },
    "type": "script"
  },
  "message": null,
  "appStatusCode": null,
}
```



```

"tags": null,
"headers": null
}

```

Reference

Understanding the sample URL:

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsouce:** Source or origin of a gateway, for example: **external**.

Issuer CA Create - GlobalSign CA

Payload

Name	Description
kubeCaSettingName	Unique name to identify the KUBE CA setting configuration.

Name	Description
<i>String</i>	
clusterPolicy	Cluster policy to which the cluster is associated to
<i>String</i>	
caAccount	Account associated with the CA.
<i>String</i>	
certificateProfile	Type of certificate.
<i>String</i>	Possible Values: Server, Client
validityUnit	Validity of the certificate.
<i>String</i>	Possible Values: Days, Months, Years
casetting_type	Type of the CA setting type.
<i>String</i>	Possible Values: CA Setting, CA Setting Cluster
groupName	Name of group where certificate might be pushed to after creation.
<i>String</i>	
certificateAuthority	Name of the Certificate Authority being configured.
<i>String</i>	Possible Values: GlobalSign
validityUnitValue	Validity unit value associated with the validity unit.
<i>String</i>	
globalSignCertificateType	GlobalSign CA certificate type based on the configurations in the CA policy.
<i>String</i>	

Response Structure

- **Status Code:** 200 OK
- **Message:** Successful

- **Headers:**
 - **Content-Type:** application/json

Name	Description
response <i>String</i>	Issuer CA created successfully
message <i>String</i>	Success message or failure description in case of error.
appStatusCode <i>String</i>	Application specific status code for the response. Will be non-null for failure response.
tags	More info in case of failure response.

Sample Request/Response

Use case: Create an issuer CA for GlobalSign CA.

Request URL

`https://<IP/HostName/TenantName>:<GWPORT>/avxapi/execute-hook?gwsource=external`

Sample Request

POST Content type: application/json Username: <> Password: <>

```
{
  "payload": {
    "hook": {
      "name": "Kube CA Settings"
    },
    "input": {
      "action": "add",
      "payload": {
        "kubeCaSettingName": "my_ca_setting",
        "clusterPolicy": "my_policy",
        "caAccount": "my_ca_account",
        "certificateProfile": "Server",
        "validityUnit": "Days",
        "casetting_type": "CA Setting",

```

```

    "groupName": "my_group",

    "certificateAuthority": "GlobalSign",

    "validityUnitValue": "365",

    "globalSignCertificateType": "my_certificate_type"

  }

}

}

}

```

Sample Response

```

{
  "response": {
    "status": "Success",

    "output": {
      "status": "Success",

      "response": "Issuer CA created successfully"
    },

    "type": "script"
  },

  "message": null,

  "appStatusCode": null,

  "tags": null,

  "headers": null
}

```

Reference

Understanding the sample URL:

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsource:** Source or origin of a gateway, for example: **external**.

Issuer CA Create - GlobalSignAtlas CA

Payload

Name	Description
kubeCaSettingName	Unique name to identify the KUBE CA setting configuration.
String	
clusterPolicy	Cluster policy to which the cluster is associated to
String	
caAccount	Account associated with the CA.
String	
certificateProfile	Type of certificate.
String	Possible Values: Server, Client
validityUnit	Validity of the certificate.
String	Possible Values: Days, Months, Years
casetting_type	Type of the CA setting type.

Name	Description
<i>String</i>	Possible Values: CA Setting, CA Setting Cluster
groupName	Name of group where certificate might be pushed to after creation.
<i>String</i>	
certificateAuthority	Name of the Certificate Authority being configured.
<i>String</i>	Possible Values: GlobalSignAtlas
validityUnitValue	Validity unit value associated with the validity unit.
<i>String</i>	

Response Structure

- **Status Code:** 200 OK
- **Message:** Successful
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response	Issuer CA created successfully
<i>String</i>	
message	Success message or failure description in case of error.
<i>String</i>	
appStatusCode	Application specific status code for the response. Will be non-null for failure response.
<i>String</i>	
tags	More info in case of failure response.

Sample Request/Response

Use case: Create an issuer CA for GlobalSign Atlas CA.

Request URL

`https://<IP/HostName/TenantName>:<GWPORT>/avxapi/execute-hook?gwsouce=external`

Sample Request

```
POST Content type: application/json Username: <> Password: <>

{
  "payload": {
    "hook": {
      "name": "Kube CA Settings"
    },
    "input": {
      "action": "add",
      "payload": {
        "kubeCaSettingName": "aawwwaaxxx",
        "clusterPolicy": "cluster_policy-globalsign-atlas_ca_caset_clu",
        "caAccount": "GlobalSignAtlas_Crypto_Mesh_CA",
        "certificateProfile": "Server",
        "validityUnit": "Days",
        "casetting_type": "CA Setting",
        "groupName": "CryptoMesh_GlobalSignAtlas_Group",
        "certificateAuthority": "GlobalSignAtlas",
        "validity_unit": "Days",
        "validity_unit_value": "365"
      }
    }
  }
}
```

Sample Response

```
{
  "response": {
    "status": "Success",
    "output": {
      "status": "Success",
      "response": "Issuer CA created successfully"
    },
    "type": "script"
  },
}
```

```

"message": null,
"appStatusCode": null,
"tags": null,
"headers": null
}

```

Reference

Understanding the sample URL:

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsources:** Source or origin of a gateway, for example: **external**.

Issuer CA Create - GlobalSignMSSL CA

Payload

Name	Description
kubeCaSettingName <i>String</i>	Unique name to identify the KUBE CA setting configuration.
clusterPolicy <i>String</i>	Cluster policy to which the cluster is associated to
caAccount <i>String</i>	Account associated with the CA.
certificateProfile <i>String</i>	Type of certificate. Possible Values: Server, Client
validityUnit <i>String</i>	Validity of the certificate. Possible Values: Days, Months, Years
casetting_type <i>String</i>	Type of the CA setting type. Possible Values: CA Setting, CA Setting Cluster
groupName <i>String</i>	Name of group where certificate might be pushed to after creation.
certificateAuthority <i>String</i>	Name of the Certificate Authority being configured. Possible Values: GlobalSignMSSL
validityUnitValue <i>String</i>	Validity unit value associated with the validity unit.
globalSignMsslProductType <i>String</i>	GlobalSignMSSL product type based on the configurations in the CA policy.

Name	Description
globalSignMsslProfileName	GlobalSignMSSL profile name based on the configurations in the CA policy.
String	

Response Structure

- **Status Code:** 200 OK
- **Message:** Successful
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response	Issuer CA created successfully
String	
message	Success message or failure description in case of error.
String	
appStatusCode	Application specific status code for the response. Will be non-null for failure response.
String	
tags	More info in case of failure response.

Sample Request/Response

Use case: Create an issuer CA for GlobalSignMSSL CA.

Request URL

https://<IP/HostName/TenantName>:<GWPORT>/avxapi/execute-hook?gwsource=external

Sample Request

```
POST Content type: application/json Username: <> Password: <>

{
  "payload": {
    "hook": {
      "name": "Kube CA Settings"
    },
  },
}
```

```

"input": {
  "action": "add",
  "payload": {
    "kubeCaSettingName": "my_ca_setting",
    "clusterPolicy": "my_policy",
    "caAccount": "my_ca_account",
    "certificateProfile": "Server",
    "validityUnit": "Days",
    "casetting_type": "CA Setting",
    "groupName": "my_group",
    "certificateAuthority": "GlobalSignMSSL",
    "validityUnitValue": "365",
    "globalSignMsslProductType": "my_product_type",
    "globalSignMsslProfileName": "my_profile_name"
  }
}
}
}

```

Sample Response

```

{
  "response": {
    "status": "Success",
    "output": {
      "status": "Success",
      "response": "Issuer CA created successfully"
    },
    "type": "script"
  },
  "message": null,
  "appStatusCode": null,
  "tags": null,
  "headers": null
}

```

Reference

Understanding the sample URL:

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsouce:** Source or origin of a gateway, for example: **external**.

Issuer CA Create - HashicorpVault CA

Payload

Name	Description
kubeCaSettingName	Unique name to identify the KUBE CA setting configuration.
<i>String</i>	
clusterPolicy	Cluster policy to which the cluster is associated to
<i>String</i>	
caAccount	Account associated with the CA.
<i>String</i>	

Name	Description
certificateProfile	Type of certificate.
<i>String</i>	Possible Values: Server, Client
validityUnit	Validity of the certificate.
<i>String</i>	Possible Values: Days, Months, Years
casetting_type	Type of the CA setting type.
<i>String</i>	Possible Values: CA Setting, CA Setting Cluster
groupName	Name of group where certificate might be pushed to after creation.
<i>String</i>	
certificateAuthority	Name of the Certificate Authority being configured.
<i>String</i>	Possible Values: HashicorpVault
validityHashiCorpvault	Validity unit value associated with the validity unit.
<i>String</i>	
hashiCorpVaultNamespace	HashicorpVault Product type based on the configurations in the CA policy.
<i>String</i>	
hashiCorpVaultSecretEngine	HashicorpVault secret engine based on the configurations in the CA policy.
<i>String</i>	
hashiCorpVaultSecretEngineRole	HashicorpVault secret engine role based on the configurations in the CA policy.
<i>String</i>	

Response Structure

- **Status Code:** 200 OK
- **Message:** Successful
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response <i>String</i>	Issuer CA created successfully
message <i>String</i>	Success message or failure description in case of error.
appStatusCode <i>String</i>	Application specific status code for the response. Will be non-null for failure response.
tags	More info in case of failure response.

Sample Request/Response

Use case: Create an issuer CA for HashicorpVault CA.

Request URL

`https://<IP/HostName/TenantName>:<GWPORT>/avxapi/execute-hook?gwsource=external`

Sample Request

POST Content type: application/json Username: <> Password: <>

```
{
  "payload": {
    "hook": {
      "name": "Kube CA Settings"
    },
    "input": {
      "action": "add",
      "payload": {
        "kubeCaSettingName": "aaxxqqwwqaas",
        "clusterPolicy": "Cluster_policy-hashicorp-vault_ca-csr-in-appviewx",
        "caAccount": "HashicorpVault_Crypto_Mesh_CA",
        "certificateProfile": "Server",
        "casetting_type": "CA Setting",
        "groupName": "CryptoMesh_HashicorpVault_Group",
        "certificateAuthority": "HashicorpVault",
        "validityHashicorpvault": "365",
        "hashicorpVaultNamespace": "containers",
```

```

    "hashiCorpVaultSecretEngine": "pki_int",
    "hashiCorpVaultSecretEngineRole": "Server-Certificate"
  }
}
}
}

```

Sample Response

```

{
  "response": {
    "status": "Success",
    "output": {
      "status": "Success",
      "response": "Issuer CA created successfully"
    },
    "type": "script"
  },
  "message": null,
  "appStatusCode": null,
  "tags": null,
  "headers": null
}

```

Reference

Understanding the sample URL:

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsouce:** Source or origin of a gateway, for example: **external**.

Issuer CA Create - InCommon CA

Payload

Name	Description
kubeCaSettingName	Unique name to identify the KUBE CA setting configuration.
String	
clusterPolicy	Cluster policy to which the cluster is associated to
String	
caAccount	Account associated with the CA.
String	
certificateProfile	Type of certificate.
String	Possible Values: Server, Client
validityUnit	Validity of the certificate.
String	Possible Values: Days, Months, Years
casetting_type	Type of the CA setting type.

Name	Description
<i>String</i>	Possible Values: CA Setting, CA Setting Cluster
groupName	Name of group where certificate might be pushed to after creation.
<i>String</i>	
certificateAuthority	Name of the Certificate Authority being configured.
<i>String</i>	Possible Values: InCommon
incommonCertificateType	InCommon certificate type based on the configurations in the CA policy.
<i>String</i>	

Response Structure

- **Status Code:** 200 OK
- **Message:** Successful
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response	Issuer CA created successfully
<i>String</i>	
message	Success message or failure description in case of error.
<i>String</i>	
appStatusCode	Application specific status code for the response. Will be non-null for failure response.
<i>String</i>	
tags	More info in case of failure response.

Sample Request/Response

Use case: Create an issuer CA for InCommon CA.

Request URL

`https://<IP/HostName/TenantName>:<GWPORT>/avxapi/execute-hook?gwsource=external`

Sample Request

POST Content type: application/json Username: <> Password: <>

```
{
  "payload": {
    "hook": {
      "name": "Kube CA Settings"
    },
    "input": {
      "action": "add",
      "payload": {
        "kubeCaSettingName": "my_ca_setting",
        "clusterPolicy": "my_policy",
        "caAccount": "my_ca_account",
        "certificateProfile": "Server",
        "casetting_type": "CA Setting",
        "groupName": "my_group",
        "certificateAuthority": "InCommon",
        "incommonCertificateType": "my_certificate_type"
      }
    }
  }
}
```

Sample Response

```
{
  "response": {
    "status": "Success",
    "output": {
      "status": "Success",
      "response": "Issuer CA created successfully"
    },
    "type": "script"
  },
  "message": null,
  "appStatusCode": null,
}
```

```
"tags": null,
"headers": null
}
```

Reference

Understanding the sample URL:

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsouce:** Source or origin of a gateway, for example: **external**.

Issuer CA Create - Nexus CA

Payload

Name	Description
kubeCaSettingName	Unique name to identify the KUBE CA setting configuration.

Name	Description
<i>String</i>	
clusterPolicy	Cluster policy to which the cluster is associated to
<i>String</i>	
caAccount	Account associated with the CA.
<i>String</i>	
certificateProfile	Type of certificate.
<i>String</i>	Possible Values: Server, Client
validityUnit	Validity of the certificate.
<i>String</i>	Possible Values: Days, Months, Years
casetting_type	Type of the CA setting type.
<i>String</i>	Possible Values: CA Setting, CA Setting Cluster
groupName	Name of group where certificate might be pushed to after creation.
<i>String</i>	
certificateAuthority	Name of the Certificate Authority being configured.
<i>String</i>	Possible Values: Nexus
nexusProcedure	Procedure or method used in Nexus based on the configurations in the CA policy.
<i>String</i>	

Response Structure

- **Status Code:** 200 OK
- **Message:** Successful
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response <i>String</i>	Issuer CA created successfully
message <i>String</i>	Success message or failure description in case of error.
appStatusCode <i>String</i>	Application specific status code for the response. Will be non-null for failure response.
tags	More info in case of failure response.

Sample Request/Response

Use case: Create an issuer CA for Nexus CA.

Request URL

`https://<IP/HostName/TenantName>:<GWPORT>/avxapi/execute-hook?gwsouce=external`

Sample Request

POST Content type: application/json Username: <> Password: <>

```
{
  "payload": {
    "hook": {
      "name": "Kube CA Settings"
    },
    "input": {
      "action": "add",
      "payload": {
        "kubeCaSettingName": "aaxzzzssdaxsa",
        "clusterPolicy": "cluster_policy-nexus_ca_caset_clu",
        "caAccount": "Nexus_Crypto_Mesh_CA",
        "certificateProfile": "Server",
        "casetting_type": "CA Setting",
        "groupName": "CryptoMesh_Nexus_Group",
        "certificateAuthority": "Nexus",
        "nexusProcedure": "AppViewX REST Client"
      }
    }
  }
}
```

```

    }
  }
}

```

Sample Response

```

{
  "response": {
    "status": "Success",
    "output": {
      "status": "Success",
      "response": "Issuer CA created successfully"
    },
    "type": "script"
  },
  "message": null,
  "appStatusCode": null,
  "tags": null,
  "headers": null
}

```

Reference

Understanding the sample URL:

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi**: Path parameter value (static) that is part of the endpoint's URL
- **Endpoint**: Endpoint of the API, for example: **execute-hook**
- **gwsSource**: Source or origin of a gateway, for example: **external**.

Issuer CA Create - Trustwave CA

Payload

Name	Description
kubeCaSettingName	Unique name to identify the KUBE CA setting configuration.
<i>String</i>	
clusterPolicy	Cluster policy to which the cluster is associated to
<i>String</i>	
caAccount	Account associated with the CA.
<i>String</i>	
certificateProfile	Type of certificate.
<i>String</i>	Possible Values: Server, Client
validityUnit	Validity of the certificate.
<i>String</i>	Possible Values: Days, Months, Years
casetting_type	Type of the CA setting type.
<i>String</i>	Possible Values: CA Setting, CA Setting Cluster
groupName	Name of group where certificate might be pushed to after creation.
<i>String</i>	

Name	Description
certificateAuthority	Name of the Certificate Authority being configured.
<i>String</i>	Possible Values: Trustwave
trustwaveCertificateType	Certificate type of the Trustwave based on the configurations in the CA policy.
<i>String</i>	

Response Structure

- **Status Code:** 200 OK
- **Message:** Successful
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response	Issuer CA created successfully
<i>String</i>	
message	Success message or failure description in case of error.
<i>String</i>	
appStatusCode	Application specific status code for the response. Will be non-null for failure response.
<i>String</i>	
tags	More info in case of failure response.

Sample Request/Response

Use case: Create an issuer CA for Trustwave CA.

Request URL

`https://<IP/HostName/TenantName>:<GWPORT>/avxapi/execute-hook?gwsources=external`

Sample Request

```
POST Content type: application/json Username: <> Password: <>
{
```



```

"payload": {
  "hook": {
    "name": "Kube CA Settings"
  },
  "input": {
    "action": "add",
    "payload": {
      "kubeCaSettingName": "aasswwecc",
      "clusterPolicy": "cluster_policy-trustwave_ca_caset_clu_with_csr_in_appviewx",
      "caAccount": "TrustWave_Crypto_Mesh_CA",
      "certificateProfile": "Server",
      "casetting_type": "CA Setting",
      "groupName": "CryptoMesh_TrustWave_Group",
      "certificateAuthority": "Trustwave",
      "trustwaveCertificateType": "SecureTrust Organization Validation"
    }
  }
}

```

Sample Response

```

{
  "response": {
    "status": "Success",
    "output": {
      "status": "Success",
      "response": "Issuer CA created successfully"
    }
  },
  "type": "script"
},
"message": null,
"appStatusCode": null,
"tags": null,
"headers": null
}

```

Reference

Understanding the sample URL:

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsouce:** Source or origin of a gateway, for example: **external**.

Issuer CA Create - Microsoft Enterprise CA

Payload

Name	Description
kubeCaSettingName	Unique name to identify the KUBE CA setting configuration.
<i>String</i>	
clusterPolicy	Cluster policy to which the cluster is associated to
<i>String</i>	

Name	Description
caAccount	Account associated with the CA.
<i>String</i>	
certificateProfile	Type of certificate.
<i>String</i>	Possible Values: Server, Client
validityUnit	Validity of the certificate.
<i>String</i>	Possible Values: Days, Months, Years
casetting_type	Type of the CA setting type.
<i>String</i>	Possible Values: CA Setting, CA Setting Cluster
groupName	Name of group where certificate might be pushed to after creation.
<i>String</i>	
certificateAuthority	Name of the Certificate Authority being configured.
<i>String</i>	Possible Values: Microsoft Enterprise
mscaenterprise_templateName	Template used in Microsoft enterprise CA based on the configurations in the CA policy.
<i>String</i>	

Response Structure

- **Status Code:** 200 OK
- **Message:** Successful
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response	Issuer CA created successfully
<i>String</i>	
message	Success message or failure description in case of error.

Name	Description
<i>String</i>	
appStatusCode	Application specific status code for the response. Will be non-null for failure response.
<i>String</i>	
tags	More info in case of failure response.

Sample Request/Response

Use case: Create an issuer CA for Microsoft Enterprise CA.

Request URL

`https://<IP/HostName/TenantName>:<GWPORT>/avxapi/execute-hook?gwsource=external`

Sample Request

POST Content type: application/json Username: <> Password: <>

```
{
  "payload": {
    "hook": {
      "name": "Kube CA Settings"
    },
    "input": {
      "action": "add",
      "payload": {
        "kubeCaSettingName": "aaasmmm",
        "clusterPolicy": "cluster_policy-ms-enterprise_ca_caset_clu",
        "caAccount": "Microsoft_Enterprise_Crypto_Mesh_CA",
        "certificateProfile": "Server",
        "casetting_type": "CA Setting",
        "groupName": "CryptoMesh_MS_Enterprise_Group",
        "certificateAuthority": "Microsoft Enterprise",
        "mscaenterprise_templateName": "ServerCertificate"
      }
    }
  }
}
```

Sample Response

```
{
  "response": {
    "status": "Success",
    "output": {
      "status": "Success",
      "response": "Issuer CA created successfully"
    },
    "type": "script"
  },
  "message": null,
  "appStatusCode": null,
  "tags": null,
  "headers": null
}
```

Reference

Understanding the sample URL:

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi**: Path parameter value (static) that is part of the endpoint's URL
- **Endpoint**: Endpoint of the API, for example: **execute-hook**
- **gwsource**: Source or origin of a gateway, for example: **external**.

Issuer CA Create - Microsoft Standalone CA

Payload

Name	Description
kubeCaSettingName	Unique name to identify the KUBE CA setting configuration.
<i>String</i>	
clusterPolicy	Cluster policy to which the cluster is associated to
<i>String</i>	
caAccount	Account associated with the CA.
<i>String</i>	
certificateProfile	Type of certificate.
<i>String</i>	Possible Values: Server, Client
validityUnit	Validity of the certificate.
<i>String</i>	Possible Values: Days, Months, Years
casetting_type	Type of the CA setting type.
<i>String</i>	Possible Values: CA Setting, CA Setting Cluster
groupName	Name of group where certificate might be pushed to after creation.
<i>String</i>	
certificateAuthority	Name of the Certificate Authority being configured.
<i>String</i>	Possible Values: Microsoft Standalone

Response Structure

- **Status Code:** 200 OK
- **Message:** Successful
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response <i>String</i>	Issuer CA created successfully
message <i>String</i>	Success message or failure description in case of error.
appStatusCode <i>String</i>	Application specific status code for the response. Will be non-null for failure response.
tags	More info in case of failure response.

Sample Request/Response

Use case: Create an issuer CA for Microsoft Standalone CA.

Request URL

https://<IP/HostName/TenantName>:<GWPORT>/avxapi/execute-hook?gwsource=external

Sample Request

```
POST Content type: application/json Username: <> Password: <>

{
  "payload": {
    "hook": {
      "name": "Kube CA Settings"
    },
    "input": {
      "action": "add",
      "payload": {
        "kubeCaSettingName": "aaqdsdcweq",
        "clusterPolicy": "cluster_polisy-ms-standalone_ca_caset_clu",

```

```

    "caAccount": "Microsoft_Standalone_Crypto_Mesh_CA",
    "certificateProfile": "Server",
    "casetting_type": "CA Setting",
    "groupName": "CryptoMesh_MS_Standalone_Group",
    "certificateAuthority": "Microsoft Standalone"
  }
}
}
}

```

Sample Response

```

{
  "response": {
    "status": "Success",
    "output": {
      "status": "Success",
      "response": "Issuer CA created successfully"
    },
    "type": "script"
  },
  "message": null,
  "appStatusCode": null,
  "tags": null,
  "headers": null
}

```

Reference

Understanding the sample URL:

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsource:** Source or origin of a gateway, for example: **external**.

Issuer CA Create - Google CA

Payload

Name	Description
kubeCaSettingName	Unique name to identify the KUBE CA setting configuration.
String	
clusterPolicy	Cluster policy to which the cluster is associated to
String	
caAccount	Account associated with the CA.
String	
certificateProfile	Type of certificate.
String	Possible Values: Server, Client
validityUnit	Validity of the certificate.
String	Possible Values: Days, Months, Years
casetting_type	Type of the CA setting type.

Name	Description
<i>String</i>	Possible Values: CA Setting, CA Setting Cluster
groupName	Name of group where certificate might be pushed to after creation.
<i>String</i>	
certificateAuthority	Name of the Certificate Authority being configured.
<i>String</i>	Possible Values: Google
google_issuerLocation	Issuer location of the Google.
<i>String</i>	
google_issuerName	Issuer name of the Google.
<i>String</i>	
google_poolName	Pool name of the Google.
<i>String</i>	
google_certificateProfile	Certificate profile of the Google.
<i>String</i>	

Response Structure

- **Status Code:** 200 OK
- **Message:** Successful
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response	Issuer CA created successfully
<i>String</i>	
message	Success message or failure description in case of error.

Name	Description
<i>String</i>	
appStatusCode	Application specific status code for the response. Will be non-null for failure response.
<i>String</i>	
tags	More info in case of failure response.

Sample Request/Response

Use case: Create an issuer CA for Google CA.

Request URL

`https://<IP/HostName/TenantName>:<GWPORT>/avxapi/execute-hook?gwsource=external`

Sample Request

POST Content type: application/json Username: <> Password: <>

```
{
  "payload": {
    "hook": {
      "name": "Kube CA Settings"
    },
    "input": {
      "action": "add",
      "payload": {
        "kubeCaSettingName": "my_ca_setting",
        "clusterPolicy": "my_policy",
        "caAccount": "my_ca_account",
        "certificateProfile": "Server",
        "casetting_type": "CA Setting",
        "groupName": "my_group",
        "certificateAuthority": "Google",
        "google_issuerLocation": "my_issuer_location",
        "google_issuerName": "my_issuer_name",
        "google_poolName": "my_pool_name",
        "google_certificateProfile": "my_certificate_profile"
      }
    }
  }
}
```

```
}
}
```

Sample Response

```
{
  "response": {
    "status": "Success",
    "output": {
      "status": "Success",
      "response": "Issuer CA created successfully"
    },
    "type": "script"
  },
  "message": null,
  "appStatusCode": null,
  "tags": null,
  "headers": null
}
```

Reference

Understanding the sample URL:

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi**: Path parameter value (static) that is part of the endpoint's URL
- **Endpoint**: Endpoint of the API, for example: **execute-hook**
- **gwsSource**: Source or origin of a gateway, for example: **external**.

Issuer CA Create - AppViewX PKIaaS CA

Payload

Name	Description
kubeCaSettingName	Unique name to identify the KUBE CA setting configuration.
<i>String</i>	
clusterPolicy	Cluster policy to which the cluster is associated to
<i>String</i>	
caAccount	Account associated with the CA.
<i>String</i>	
certificateProfile	Type of certificate.
<i>String</i>	Possible Values: Server, Client
validityUnit	Validity of the certificate.
<i>String</i>	Possible Values: Days, Months, Years
casetting_type	Type of the CA setting type.
<i>String</i>	Possible Values: CA Setting, CA Setting Cluster
groupName	Name of group where certificate might be pushed to after creation.
<i>String</i>	

Name	Description
certificateAuthority	Name of the Certificate Authority being configured.
<i>String</i>	Possible Values: AppViewX PKIaaS
appviewxpkiaaS_issuerLocation	AppViewX PKIaaS issuer location based on the configurations in the CA policy.
<i>String</i>	
appviewxpkiaaS_issuerName	AppViewX PKIaaS issuer name based on the configurations in the CA policy.
<i>String</i>	
appviewxpkiaaS_poolName	AppViewX PKIaaS pool name based on the configurations in the CA policy.
<i>String</i>	
appviewxpkiaaS_certificateProfile	AppViewX PKIaaS certificate profile based on the configurations in the CA policy.
<i>String</i>	

Response Structure

- **Status Code:** 200 OK
- **Message:** Successful
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response	Issuer CA created successfully
<i>String</i>	
message	Success message or failure description in case of error.
<i>String</i>	
appStatusCode	Application specific status code for the response. Will be non-null for failure response.
<i>String</i>	
tags	More info in case of failure response.

Sample Request/Response

Use case: Create an issuer CA for AppViewX PKIaaS CA.

Request URL

`https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-issuer-ca-template-add?gwsource=external`

Sample Request

```
POST Content type: application/json Username: <> Password: <>

{
  "payload": {
    "hook": {
      "name": "Kube CA Settings"
    },
    "input": {
      "action": "add",
      "payload": {
        "kubeCaSettingName": "my_ca_setting",
        "clusterPolicy": "my_policy",
        "caAccount": "my_ca_account",
        "certificateProfile": "Server",
        "casetting_type": "CA Setting",
        "groupName": "my_group",
        "certificateAuthority": "AppViewX PKIaaS",
        "appviewxpkiass_issuerLocation": "my_issuer_location",
        "appviewxpkiass_issuerName": "my_issuer_name",
        "appviewxpkiass_poolName": "my_pool_name",
        "appviewxpkiass_certificateProfile": "my_certificate_profile"
      }
    }
  }
}
```

Sample Response

```
{
  "response": {
    "status": "Success",
    "output": {
      "status": "Success",
```

```

    "response": "Issuer CA created successfully"
  },
  "type": "script"
},
"message": null,
"appStatusCode": null,
"tags": null,
"headers": null
}

```

Reference

Understanding the sample URL:

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsouce:** Source or origin of a gateway, for example: **external**.

Issuer CA Create - Amazon CA

Payload

Name	Description
kubeCaSettingName <i>String</i>	Unique name to identify the KUBE CA setting configuration.
clusterPolicy <i>String</i>	Cluster policy to which the cluster is associated to
caAccount <i>String</i>	Account associated with the CA.
certificateProfile <i>String</i>	Type of certificate. Possible Values: Server, Client
validityUnit <i>String</i>	Validity of the certificate. Possible Values: Days, Months, Years
casetting_type <i>String</i>	Type of the CA setting type. Possible Values: CA Setting, CA Setting Cluster
groupName <i>String</i>	Name of group where certificate might be pushed to after creation.
certificateAuthority <i>String</i>	Name of the Certificate Authority being configured. Possible Values: Amazon
amazonPrivateCaIssuer <i>String</i>	Issuer for Amazon Private CA.
amazonPrivateCaRegion <i>String</i>	Region for the Amazon Private CA.
enrollVia	Method of enrollment for the certificates.

Name	Description
<i>String</i>	
validityUnitValue	Validity unit value associated with the validity unit.
<i>String</i>	

Response Structure

- **Status Code:** 200 OK
- **Message:** Successful
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response <i>String</i>	Issuer CA created successfully
message <i>String</i>	Success message or failure description in case of error.
appStatusCode <i>String</i>	Application specific status code for the response. Will be non-null for failure response.
tags	More info in case of failure response.

Sample Request/Response

Use case: Create an issuer CA for Amazon CA.

Request URL

`https://<IP/HostName/TenantName>:<GWPORT>/avxapi/execute-hook?gwsource=external`

Sample Request

POST Content type: application/json Username: <> Password: <>

```
{
  "payload": {
```

```

"hook": {
  "name": "Kube CA Settings"
},
"input": {
  "action": "add",
  "payload": {
    "kubeCaSettingName": "my_ca_setting",
    "clusterPolicy": "my_policy",
    "caAccount": "my_ca_account",
    "certificateProfile": "Server",
    "validityUnit": "Days",
    "casetting_type": "CA Setting",
    "groupName": "my_group",
    "certificateAuthority": "Amazon",
    "amazonPrivateCaIssuer": "my_issuer",
    "amazonPrivateCaRegion": "my_region",
    "enrollVia": "PCA",
    "validityUnitValue": "365"
  }
}
}
}

```

Sample Response

```

{
  "response": {
    "status": "Success",
    "output": {
      "status": "Success",
      "response": "Issuer CA created successfully"
    }
  },
  "type": "script"
},
"message": null,
"appStatusCode": null,
"tags": null,

```

```
"headers": null
}
```

Reference

Understanding the sample URL:

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsouce:** Source or origin of a gateway, for example: **external**.

Issuer CA Create - GoDaddy CA

Payload

Name	Description
kubeCaSettingName	Unique name to identify the KUBE CA setting configuration.
<i>String</i>	

Name	Description
clusterPolicy	Cluster policy to which the cluster is associated to
<i>String</i>	
caAccount	Account associated with the CA.
<i>String</i>	
certificateProfile	Type of certificate.
<i>String</i>	Possible Values: Server, Client
validityUnit	Validity of the certificate.
<i>String</i>	Possible Values: Days, Months, Years
casetting_type	Type of the CA setting type.
<i>String</i>	Possible Values: CA Setting, CA Setting Cluster
groupName	Name of group where certificate might be pushed to after creation.
<i>String</i>	
certificateAuthority	Name of the Certificate Authority being configured.
<i>String</i>	Possible Values: GoDaddy
godaddyCertificateType	GoDaddy certificate type based on the configurations in the CA policy.
<i>String</i>	

Response Structure

- **Status Code:** 200 OK
- **Message:** Successful
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response	Issuer CA created successfully

Name	Description
<i>String</i>	
message	Success message or failure description in case of error.
<i>String</i>	
appStatusCode	Application specific status code for the response. Will be non-null for failure response.
<i>String</i>	
tags	More info in case of failure response.

Sample Request/Response

Use case: Create an issuer CA for GoDaddy CA.

Request URL

`https://<IP/HostName/TenantName>:<GWPORT>/avxapi/execute-hook?gwsources=external`

Sample Request

POST Content type: application/json Username: <> Password: <>

```
{
  "payload": {
    "hook": {
      "name": "Kube CA Settings"
    },
    "input": {
      "action": "add",
      "payload": {
        "kubeCaSettingName": "my_ca_setting",
        "clusterPolicy": "my_policy",
        "caAccount": "my_ca_account",
        "certificateProfile": "Server",
        "casetting_type": "CA Setting",
        "groupName": "my_group",
        "certificateAuthority": "GoDaddy",
        "godaddyCertificateType": "my_certificate_type"
      }
    }
  }
}
```

```
}
}
```

Sample Response

```
{
  "response": {
    "status": "Success",
    "output": {
      "status": "Success",
      "response": "Issuer CA created successfully"
    },
    "type": "script"
  },
  "message": null,
  "appStatusCode": null,
  "tags": null,
  "headers": null
}
```

Reference

Understanding the sample URL:

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi**: Path parameter value (static) that is part of the endpoint's URL
- **Endpoint**: Endpoint of the API, for example: **execute-hook**
- **gwsouce**: Source or origin of a gateway, for example: **external**.

Issuer CA Create - LetsEncrypt CA

Payload

Name	Description
kubeCaSettingName	Unique name to identify the KUBE CA setting configuration.
<i>String</i>	
clusterPolicy	Cluster policy to which the cluster is associated to
<i>String</i>	
caAccount	Account associated with the CA.
<i>String</i>	
certificateProfile	Type of certificate.
<i>String</i>	Possible Values: Server, Client
validityUnit	Validity of the certificate.
<i>String</i>	Possible Values: Days, Months, Years
casetting_type	Type of the CA setting type.
<i>String</i>	Possible Values: CA Setting, CA Setting Cluster
groupName	Name of group where certificate might be pushed to after creation.
<i>String</i>	

Name	Description
certificateAuthority	Name of the Certificate Authority being configured.
<i>String</i>	Possible Values: LetsEncrypt
letsEncryptEmail	The email address associated with the Let's Encrypt account for notifications based on the configurations in the CA policy.
<i>String</i>	
letsEncryptEnvironment	Environment for Let's Encrypt based on the configurations in the CA policy.
<i>String</i>	

Response Structure

- **Status Code:** 200 OK
- **Message:** Successful
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response	Issuer CA created successfully
<i>String</i>	
message	Success message or failure description in case of error.
<i>String</i>	
appStatusCode	Application specific status code for the response. Will be non-null for failure response.
<i>String</i>	
tags	More info in case of failure response.

Sample Request/Response

Use case: Create an issuer CA for Let's Encrypt CA.

Request URL

`https://<IP/HostName/TenantName>:<GWPORT>/avxapi/execute-hook?gwsouce=external`

Sample Request

POST Content type: application/json Username: <> Password: <>

```
{
  "payload": {
    "hook": {
      "name": "Kube CA Settings"
    },
    "input": {
      "action": "add",
      "payload": {
        "kubeCaSettingName": "my_ca_setting",
        "clusterPolicy": "my_policy",
        "caAccount": "my_ca_account",
        "certificateProfile": "Server",
        "casetting_type": "CA Setting",
        "groupName": "my_group",
        "certificateAuthority": "LetsEncrypt",
        "letsEncryptEmail": "my_email@example.com",
        "letsEncryptEnvironment": "my_environment"
      }
    }
  }
}
```

Sample Response

```
{
  "response": {
    "status": "Success",
    "output": {
      "status": "Success",
      "response": "Issuer CA created successfully"
    },
    "type": "script"
  },
  "message": null,
  "appStatusCode": null,
  "tags": null,
}
```

```
"headers": null
}
```

Reference

Understanding the sample URL:

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsouce:** Source or origin of a gateway, for example: **external**.

Cluster Policy Template Create

This API is used to create cluster policy template.

Request Structure

Endpoint:	/kube-cluster-policy-template-add
Type:	POST

Sample URL:	<code>https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-cluster-policy-template-add?</code> <code>gwsource=external</code> To understand the elements of the sample URL, click here .
Headers:	
Content-Type:	application/json

Input Parameter

Name	Description
sessionId (Mandatory) A unique identifier assigned to a user's session upon successful authentication. The session ID remains valid until it expires, and it can contain alphanumeric characters. <i>Header</i> Type: String Constraints: The session ID is used when username and password are not provided. Example: <code>A1B2c3d4E5F6</code>	
gwsource (Mandatory) Source from which the request is triggered. <i>Query</i> Type: String Example: <code>DataCenterA</code>	
payload (Mandatory) Input data for request body in application/json format. For payload details, see Payload section. <i>Body</i>	

Payload

Name	Description
policyName <i>String</i>	Unique name assigned to the policy.
description <i>String</i>	A brief description of the policy's purpose or details.
discoveryExclusionRegex	Object defining regex patterns for excluding certain items from discovery.

Name		Description
<i>Object</i>		
caSettingTemplates		Contains CA setting template details.
<i>Object</i>		
		• Amazon Private CA • AppViewX • Comodo Certificate Manager • DigiCert • DigiCert MPKI • EJBCA • Entrust • Entrust MPKI • GlobalSign • GlobalSignAtlas • GlobalSignMSSL • HashicorpVault • InCommon • Nexus • Trustwave • Microsoft Enterprise • Microsoft Standalone • Google • AppViewX PKIaaS
casettingType		Specifies the type of certificate used in the policy based on the CA setting template.
<i>String</i>		

Response Structure

- **Status Code:** 200 OK
- **Message:** SUCCESS
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response <i>String</i>	Successfully added policy.
message <i>String</i>	Success message or failure description in case of error.
appStatusCode <i>String</i>	Application specific status code for the response. Will be non-null for failure response.
tags	More info in case of failure response.

Sample Request/Response

Use case: Create a Cluster policy template using policy name "cluster-policy".

Request URL

`https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-issuer-ca-template-add?gwsource=external`

Sample Request

POST Content type: application/json Username: <> Password: <>

```
{
  "payload": {
    "policyName": "cluster-policy",
    "description": "Description",
    "discoveryExclusionRegex": [
      "test.*"
    ],
    "caSettingTemplates": [],
    "casettingType": "CA Setting Cluster"
  }
}
```

Sample Response

```
{
  "response": {
    "messageType": "SUCCESS",
    "message": "Successfully added policy."
  }
}
```

```

},
"message": "Successfully added policy.",
"appStatusCode": "success",
"tags": null,
"headers": null
}

```

Use case: Create a Cluster policy template using policy name "cluster-policy".

Request URL

```
https://<IP/HostName/TenantName>:<GWPORT>/avxapi/cluster-policy-cluster-wide?gwsources=external
```

Sample Request

POST Content type: application/json Username: <> Password: <>

```

{
  "payload": {
    "policyName": "cluster-policy-cluster-wide",
    "description": "Description",
    "discoveryExclusionRegex": [
      "test.*"
    ],
    "caSettingTemplates": [],
    "casettingType": "CA Setting"
  }
}

```

Sample Response

```

{
  "response": {
    "messageType": "SUCCESS",
    "message": "Successfully added policy."
  },
  "message": "Successfully added policy.",
  "appStatusCode": "success",
  "tags": null,
  "headers": null
}

```

Reference

Understanding the sample URL: This section provides an explanation of each component of the sample URL structure used in API requests. For quick reference, this section is referenced in all the API topics as **Reference** in this guide.

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsouce:** Source or origin of a gateway, for example: **external**.

What's Next

- Generate or Download the Secret YAML
- [Amazon Private CA](#)
- [AppViewX CA](#)
- [Comodo Certificate Manager CA](#)
- [DigiCert CA](#)
- [DigiCert MPKI CA](#)
- [EJBCA CA](#)

- [Entrust CA](#)
- [Entrust MPKI CA](#)
- [GlobalSign CA](#)
- [GlobalSignAtlas CA](#)
- [GlobalSignMSSL CA](#)
- [HashicorpVault CA](#)
- [InCommon CA](#)
- [Nexus CA](#)
- [Trustwave CA](#)
- [Microsoft Enterprise CA](#)
- [Microsoft Standalone CA](#)
- [Google CA](#)
- [AppViewX PKIaaS CA](#)

Amazon Private CA

Payload

Name	Description
kubeCaSettingName	Unique name to identify the KUBE CA setting configuration.
<i>String</i>	
clusterPolicy	Cluster policy to which the cluster is associated to
<i>String</i>	
caAccount	Account associated with the CA.
<i>String</i>	
certificateProfile	Type of certificate.
<i>String</i>	Possible Values: Server, Client
validityUnit	Validity of the certificate.
<i>String</i>	Possible Values: Days, Months, Years

Name	Description
casettingType	Type of the CA setting type.
<i>String</i>	Possible Values: CA Setting, CA Setting Cluster
groupName	Name of group where certificate might be pushed to after creation.
<i>String</i>	
certificateAuthority	Name of the Certificate Authority being configured.
<i>String</i>	Possible Value: Amazon Private CA
amazonPrivateCaIssuer	Issuer for Amazon Private CA.
<i>String</i>	
amazonPrivateCaRegion	Region for the Amazon Private CA.
<i>String</i>	
enrollVia	Method of enrollment for the certificates.
<i>String</i>	Possible Values: PCA, ACM

Response Structure

- **Status Code:** 200 OK
- **Message:** SUCCESS
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response	Successfully added policy.
<i>String</i>	
message	Success message or failure description in case of error.
<i>String</i>	
appStatusCode	Application specific status code for the response. Will be non-null for failure response.

Name	Description
<i>String</i>	
tags	More info in case of failure response.

Sample Request/Response

Use case: Create a cluster policy template for Amazon Private CA.

Request URL

`https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-issuer-ca-template-add?gwsouce=external`

Sample Request

```
POST Content type: application/json Username: <> Password: <>

{
  "payload": {
    "kubeCaSettingName": "amazon-private-ca-cluster-wide",
    "clusterPolicy": "cluster-policy",
    "caAccount": "Amazon_Private_ACM_Standalone_Crypto_Mesh_CA",
    "certificateProfile": "Server",
    "validityUnitValue": "2",
    "groupName": "Default",
    "casettingType": "CA Setting Cluster",
    "amazonPrivateCaIssuer": "AppViewX-AWS-RootCA",
    "certificateAuthority": "Amazon Private CA",
    "validityUnit": "Days",
    "amazonPrivateCaRegion": "us-east-1",
    "enrollVia": "PCA"
  }
}
```

Sample Response

```
{
  "response": {
    "messageType": "SUCCESS",
    "message": "Successfully added issuer ca template"
  },
  "message": "Successfully added issuer ca template",
}
```

```

"appStatusCode": "success",
"tags": null,
"headers": null
}

```

Reference

Understanding the sample URL:

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsouce:** Source or origin of a gateway, for example: **external**.

AppViewX CA

Payload

Name	Description
kubeCaSettingName	Unique name to identify the KUBE CA setting configuration.

Name	Description
<i>String</i>	
clusterPolicy	Cluster policy to which the cluster is associated to.
<i>String</i>	
caAccount	Account associated with the CA.
<i>String</i>	
certificateProfile	Type of certificate.
<i>String</i>	Possible Values: Server, Client
casettingType	Type of the CA setting type.
<i>String</i>	Possible Values: CA Setting, CA Setting Cluster
groupName	Name of group where certificate might be pushed to after creation.
<i>String</i>	
certificateAuthority	Name of the Certificate Authority being configured.
<i>String</i>	Possible Value: AppViewX
validityUnit	Validity of the certificate.
<i>String</i>	
validityUnitValue	Validity unit value associated with the validity unit.
<i>String</i>	Possible Values: Days, Months, Years

Response Structure

- **Status Code:** 200 OK
- **Message:** SUCCESS
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response <i>String</i>	Successfully added policy.
message <i>String</i>	Success message or failure description in case of error.
appStatusCode <i>String</i>	Application specific status code for the response. Will be non-null for failure response.
tags	More info in case of failure response.

Sample Request/Response

Use case: Create a cluster policy template for AppViewX CA.

Request URL

`https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-issuer-ca-template-add?gwsource=external`

Sample Request

POST Content type: application/json Username: <> Password: <>

```
{
  "payload": {
    "kubeCaSettingName": "appviewx-ca3",
    "clusterPolicy": "cluster-policy",
    "caAccount": "AppViewX CA",
    "certificateProfile": "Server",
    "casettingType": "CA Setting Cluster",
    "groupName": "Default",
    "certificateAuthority": "AppViewX",
    "validityUnit": "Days",
    "validityUnitValue": "2"
  }
}
```

Sample Response

```
{
  "response": {
```

```

"messageType": "SUCCESS",
"message": "Successfully added issuer ca template"
},
"message": "Successfully added issuer ca template",
"appStatusCode": "success",
"tags": null,
"headers": null
}

```

Reference

Understanding the sample URL:

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsources:** Source or origin of a gateway, for example: **external**.

Comodo Certificate Manager CA

Payload

Name	Description
kubeCaSettingName <i>String</i>	Unique name to identify the KUBE CA setting configuration.
clusterPolicy <i>String</i>	Cluster policy to which the cluster is associated to
caAccount <i>String</i>	Account associated with the CA.
certificateProfile <i>String</i>	Type of certificate. Possible Values: Server, Client
casettingType <i>String</i>	Type of the CA setting type. Possible Values: CA Setting, CA Setting Cluster
groupName <i>String</i>	Name of group where certificate might be pushed to after creation.
certificateAuthority <i>String</i>	Name of the Certificate Authority being configured. Possible Value: Comodo Certificate Manager
validityUnit <i>String</i>	Validity of the certificate. Possible Values: Days, Months, Years
validityUnitValue <i>String</i>	Validity unit value associated with the validity unit.
comodoCertificateType <i>String</i>	Certificate type for Comodo based on the configurations in the CA policy.

Response Structure

- **Status Code:** 200 OK
- **Message:** SUCCESS
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response <i>String</i>	Successfully added policy.
message <i>String</i>	Success message or failure description in case of error.
appStatusCode <i>String</i>	Application specific status code for the response. Will be non-null for failure response.
tags	More info in case of failure response.

Sample Request/Response

Use case: Create a cluster policy template for Comodo Certificate Manager CA.

Request URL

https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-issuer-ca-template-add?gwsource=external

Sample Request

```
POST Content type: application/json Username: <> Password: <>

{
  "payload": {
    "kubeCaSettingName": "comodo-certificate-manager",
    "clusterPolicy": "cluster-policy",
    "caAccount": "AppViewX CA",
    "certificateProfile": "Server",
    "casettingType": "CA Setting Cluster",
    "groupName": "Default",
    "certificateAuthority": "Comodo Certificate Manager",
    "validityUnit": "Days",
```

```

    "validityUnitValue": "2",
    "comodoCertificateType": "my_certificate_type"
  }
}

```

Sample Response

```

{
  "response": {
    "messageType": "SUCCESS",
    "message": "Successfully added issuer ca template"
  },
  "message": "Successfully added issuer ca template",
  "appStatusCode": "success",
  "tags": null,
  "headers": null
}

```

Reference

Understanding the sample URL:

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi**: Path parameter value (static) that is part of the endpoint's URL
- **Endpoint**: Endpoint of the API, for example: **execute-hook**
- **gwsources**: Source or origin of a gateway, for example: **external**.

DigiCert CA

Payload

Name	Description
kubeCaSettingName	Unique name to identify the KUBE CA setting configuration.
<i>String</i>	
clusterPolicy	Cluster policy to which the cluster is associated to
<i>String</i>	
caAccount	Account associated with the CA.
<i>String</i>	
certificateProfile	Type of certificate.
<i>String</i>	Possible Values: Server, Client
groupName	Name of group where certificate might be pushed to after creation.
<i>String</i>	
casettingType	Type of the CA setting type.
<i>String</i>	Possible Values: CA Setting, CA Setting Cluster
certificateAuthority	Name of the Certificate Authority being configured.
<i>String</i>	Possible Value: DigiCert
validityUnit	Validity of the certificate.
<i>String</i>	Possible Values: Days, Months, Years

Name	Description
digicertCertificateType	Certificate type of the DigiCert.
<i>String</i>	
digicertPaymentMethod	Payment method of the DigiCert.
<i>String</i>	
digicertDivision	Division of the DigiCert.
<i>String</i>	
connectorName	Name of the connector used for integration with DigiCert.
<i>String</i>	
digicertDivisionId	Certificate type for DigiCert.
<i>String</i>	
digicertServerType	Server type of the DigiCert.
<i>String</i>	
certPolicyName	Unique name assigned to the certificate policy.
<i>String</i>	
validityUnitValue	Validity unit value associated with the validity unit.
<i>String</i>	

Response Structure

- **Status Code:** 200 OK
- **Message:** SUCCESS
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response	Successfully added policy.

Name	Description
<i>String</i>	
message	Success message or failure description in case of error.
<i>String</i>	
appStatusCode	Application specific status code for the response. Will be non-null for failure response.
<i>String</i>	
tags	More info in case of failure response.

Sample Request/Response

Use case: Create a cluster policy template for DigiCert CA.

Request URL

`https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-issuer-ca-template-add?gwsources=external`

Sample Request

POST Content type: application/json Username: <> Password: <>

```
{
  "payload": {
    "kubeCaSettingName": "digicert-ca",
    "clusterPolicy": "cluster-policy",
    "caAccount": "DigiCert_Crypto_Mesh_CA",
    "certificateProfile": "Server",
    "groupName": "Default",
    "casettingType": "CA Setting Cluster",
    "certificateAuthority": "DigiCert",
    "validityUnit": "Days",
    "digicertCertificateType": "Standard SSL",
    "digicertPaymentMethod": "balance",
    "digicertDivision": "AppViewX Inc.",
    "connectorName": "connectortname",
    "digicertDivisionId": "80312",
    "digicertServerType": "Apache",
    "certPolicyName": "Default",
    "validityUnitValue": "365"
```

```
}
}
```

Sample Response

```
{
  "response": {
    "messageType": "SUCCESS",
    "message": "Successfully added issuer ca template"
  },
  "message": "Successfully added issuer ca template",
  "appStatusCode": "success",
  "tags": null,
  "headers": null
}
```

Reference

Understanding the sample URL:

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL

- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsouce:** Source or origin of a gateway, for example: **external**.

DigiCert MPKI CA

Payload

Name	Description
kubeCaSettingName	Unique name to identify the KUBE CA setting configuration.
<i>String</i>	
clusterPolicy	Cluster policy to which the cluster is associated to.
<i>String</i>	
caAccount	Account associated with the CA.
<i>String</i>	
certificateProfile	Type of certificate.
<i>String</i>	Possible Values: Server, Client
validityUnit	Validity of the certificate.
<i>String</i>	Possible Values: Days, Months, Years
casettingType	Type of the CA setting type.
<i>String</i>	Possible Values: CA Setting, CA Setting Cluster
groupName	Name of group where certificate might be pushed to after creation.
<i>String</i>	
certificateAuthority	Name of the Certificate Authority being configured.
<i>String</i>	Possible Value: DigiCert MPKI
validityUnitValue	Validity unit value associated with the validity unit.

Name	Description
<i>String</i>	
digicertProfiles	Profile of the DigiCert MPKI.
<i>String</i>	

Response Structure

- **Status Code:** 200 OK
- **Message:** SUCCESS
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response	Successfully added policy.
<i>String</i>	
message	Success message or failure description in case of error.
<i>String</i>	
appStatusCode	Application specific status code for the response. Will be non-null for failure response.
<i>String</i>	
tags	More info in case of failure response.

Sample Request/Response

Use case: Create a cluster policy template for DigiCert MPKI CA.

Request URL

`https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-issuer-ca-template-add?gwsources=external`

Sample Request

POST Content type: application/json Username: <> Password: <>

```
{
  "payload": {
```



```

"cubeCaSettingName": "digicert-ca",

"clusterPolicy": "cluster-policy",

"caAccount": "DigiCert_Crypto_Mesh_CA",

"certificateProfile": "Server",

"validityUnit": "Days",

"casettingType": "CA Setting Cluster",

"groupName": "Default",

"certificateAuthority": "DigiCert MPKI",

"validityUnitValue": "365",

"digicertProfiles": "digicertProfiles"

}

}

```

Sample Response

```

{

  "response": {

    "messageType": "SUCCESS",

    "message": "Successfully added issuer ca template"

  },

  "message": "Successfully added issuer ca template",

  "appStatusCode": "success",

  "tags": null,

  "headers": null

}

```

Reference

Understanding the sample URL:

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsouce:** Source or origin of a gateway, for example: **external**.

EJBCA CA

Payload

Name	Description
kubeCaSettingName	Unique name to identify the KUBE CA setting configuration.
<i>String</i>	
clusterPolicy	Cluster policy to which the cluster is associated to
<i>String</i>	
caAccount	Account associated with the CA.
<i>String</i>	
certificateProfile	Type of certificate.
<i>String</i>	Possible Values: Server, Client
casettingType	Type of the CA setting type.
<i>String</i>	Possible Values: CA Setting, CA Setting Cluster
groupName	Name of group where certificate might be pushed to after creation.

Name	Description
<i>String</i>	
certificateAuthority	Name of the Certificate Authority being configured.
<i>String</i>	Possible Value: EJBCA
ejbcaEndEntityProfile	EJBCA profile name based on the configurations in the CA policy.
<i>String</i>	
ejbcaIssuerCommonName	EJBCA common name based on the configurations in the CA policy.
<i>String</i>	
ejbcaCertificateProfileName	EJBCA certificate profile name based on the configurations in the CA policy.
<i>String</i>	
connectorName	Name of the connector used for integration with EJBCA.
<i>String</i>	
ejbcaEndEntityUsername	The username of the end entity in EJBCA, used during certificate enrollment.
<i>String</i>	
certPolicyName	The name of the certificate policy associated with the enrollment process.
<i>String</i>	

Response Structure

- **Status Code:** 200 OK
- **Message:** SUCCESS
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response	Successfully added policy.

Name	Description
<i>String</i>	
message	Success message or failure description in case of error.
<i>String</i>	
appStatusCode	Application specific status code for the response. Will be non-null for failure response.
<i>String</i>	
tags	More info in case of failure response.

Sample Request/Response

Use case: Create a cluster policy template for EJBCA CA.

Request URL

`https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-issuer-ca-template-add?gwsources=external`

Sample Request

POST Content type: application/json Username: <> Password: <>

```
{
  "payload": {
    "kubeCaSettingName": "ejbca-12",
    "clusterPolicy": "cluster-policy",
    "caAccount": "EJBCA_Crypto_Mesh_CA",
    "certificateProfile": "Server",
    "casettingType": "CA Setting Cluster",
    "groupName": "Default",
    "certificateAuthority": "Ejbca",
    "ejbcaEndEntityProfile": "SMIME",
    "ejbcaIssuerCommonName": "AppViewX EJBCA Issuing CA",
    "ejbcaCertificateProfileName": "SMIME",
    "connectorName": "connectortname",
    "ejbcaEndEntityUsername": "End entity user name",
    "certPolicyName": "Default"
  }
}
```

Sample Response

```
{
  "response": {
    "messageType": "SUCCESS",
    "message": "Successfully added issuer ca template"
  },
  "message": "Successfully added issuer ca template",
  "appStatusCode": "success",
  "tags": null,
  "headers": null
}
```

Reference

Understanding the sample URL:

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsouce:** Source or origin of a gateway, for example: **external**.

Entrust CA

Payload

Name	Description
kubeCaSettingName	Unique name to identify the KUBE CA setting configuration.
<i>String</i>	
clusterPolicy	Cluster policy to which the cluster is associated to
<i>String</i>	
caAccount	Account associated with the CA.
<i>String</i>	
certificateProfile	Type of certificate.
<i>String</i>	Possible Values: Server, Client
validityUnit	Validity of the certificate.
<i>String</i>	Possible Values: Days, Months, Years
casettingType	Type of the CA setting type.
<i>String</i>	Possible Values: CA Setting, CA Setting Cluster
groupName	Name of group where certificate might be pushed to after creation.
<i>String</i>	
certificateAuthority	Name of the Certificate Authority being configured.
<i>String</i>	Possible Value: Entrust
entrustCertificateType	Entrust certificate type based on the configurations in the CA policy.
<i>String</i>	
entrustRequestorName	Entrust requester name based on the configurations in the CA policy.

Name	Description
<i>String</i>	
entrustRequesterEmail	Entrust requester email ID based on the configurations in the CA policy.
<i>String</i>	
entrustRequesterPhone	Entrust requester phone no. based on the configurations in the CA policy.
<i>String</i>	
entrustAdditionalEmails	Entrust additional email IDs based on the configurations in the CA policy.
<i>String</i>	
connectorName	Name of the connector used for integration with Entrust.
<i>String</i>	
certPolicyName	The name of the certificate policy associated with the enrollment process.
<i>String</i>	
validityUnitValue	Validity unit value associated with the validity unit.
<i>String</i>	

Response Structure

- **Status Code:** 200 OK
- **Message:** SUCCESS
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response	Successfully added policy.
<i>String</i>	
message	Success message or failure description in case of error.

Name	Description
<i>String</i>	
appStatusCode	Application specific status code for the response. Will be non-null for failure response.
<i>String</i>	
tags	More info in case of failure response.

Sample Request/Response

Use case: Create a cluster policy template for Entrust CA.

Request URL

https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-issuer-ca-template-add?gwsource=external

Sample Request

```
POST Content type: application/json Username: <> Password: <>

{
  "payload": {
    "kubeCaSettingName": "entrust-ca1",
    "clusterPolicy": "cluster-policy",
    "caAccount": "Entrust_Crypto_Mesh_CA",
    "certificateProfile": "Server",
    "validityUnit": "Days",
    "casettingType": "CA Setting Cluster",
    "groupName": "Default",
    "certificateAuthority": "Entrust",
    "entrustCertificateType": "Standard",
    "entrustRequestorName": "requestName",
    "entrustRequesterEmail": "requestEmail",
    "entrustRequesterPhone": "requestPhone",
    "entrustAdditionalEmails": "additionalEMails",
    "connectorName": "connectorname",
    "certPolicyName": "Default",
    "validityUnitValue": "4"
  }
}
```


Sample Response

```
{
  "response": {
    "messageType": "SUCCESS",
    "message": "Successfully added issuer ca template"
  },
  "message": "Successfully added issuer ca template",
  "appStatusCode": "success",
  "tags": null,
  "headers": null
}
```

Reference

Understanding the sample URL:

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsouce:** Source or origin of a gateway, for example: **external**.

Entrust MPKI CA

Payload

Name	Description
kubeCaSettingName	Unique name to identify the KUBE CA setting configuration.
<i>String</i>	
clusterPolicy	Cluster policy to which the cluster is associated to
<i>String</i>	
caAccount	Account associated with the CA.
<i>String</i>	
certificateProfile	Type of certificate.
<i>String</i>	Possible Values: Server, Client
validityUnit	Validity of the certificate.
<i>String</i>	Possible Values: Days, Months, Years
casettingType	Type of the CA setting type.
<i>String</i>	Possible Values: CA Setting, CA Setting Cluster
groupName	Name of group where certificate might be pushed to after creation.
<i>String</i>	
certificateAuthority	Name of the Certificate Authority being configured.
<i>String</i>	Possible Value: Entrust MPKI
entrustMпкиCaName	Entrust MPKI CA name based on the configurations in the CA policy.
<i>String</i>	
entrustmpkiCertProfiles	Entrust MPKI certificate profile based on the configurations in the CA policy.

Name	Description
<i>String</i>	
connectorName	Name of the connector used for integration with Entrust MPKI.
<i>String</i>	
certPolicyName	The name of the certificate policy associated with the enrollment process.
<i>String</i>	
validityUnitValue	Validity unit value associated with the validity unit.
<i>String</i>	

Response Structure

- **Status Code:** 200 OK
- **Message:** SUCCESS
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response` <i>String</i>	Successfully added policy.
message <i>String</i>	Success message or failure description in case of error.
appStatusCode <i>String</i>	Application specific status code for the response. Will be non-null for failure response.
tags	More info in case of failure response.

Sample Request/Response

Use case: Create a cluster policy template for Entrust MPKI CA.

Request URL

`https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-issuer-ca-template-add?gwsouce=external`

Sample Request

POST Content type: application/json Username: <> Password: <>

```
{
  "payload": {
    "kubeCaSettingName": "entrust-ca2",
    "clusterPolicy": "cluster-policy",
    "caAccount": "Entrust_Crypto_Mesh_CA",
    "certificateProfile": "Server",
    "validityUnit": "Days",
    "casettingType": "CA Setting Cluster",
    "groupName": "Default",
    "certificateAuthority": "Entrust MPKI",
    "entrustMпкиCaName": "my_ca_name",
    "entrustMпкиCertProfiles": "my_cert_profiles",
    "connectorName": "connectortname",
    "certPolicyName": "Default",
    "validityUnitValue": "4"
  }
}
```

Sample Response

```
{
  "response": {
    "messageType": "SUCCESS",
    "message": "Successfully added issuer ca template"
  },
  "message": "Successfully added issuer ca template",
  "appStatusCode": "success",
  "tags": null,
  "headers": null
}
```

Reference

Understanding the sample URL:

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
 - **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsouce:** Source or origin of a gateway, for example: **external**.

GlobalSign CA

Payload

Name	Description
kubeCaSettingName	Unique name to identify the KUBE CA setting configuration.
<i>String</i>	
clusterPolicy	Cluster policy to which the cluster is associated to
<i>String</i>	
caAccount	Account associated with the CA.
<i>String</i>	

Name	Description
certificateProfile	Type of certificate.
<i>String</i>	Possible Values: Server, Client
validityUnit	Validity of the certificate.
<i>String</i>	Possible Values: Days, Months, Years
casettingType	Type of the CA setting type.
<i>String</i>	Possible Values: CA Setting, CA Setting Cluster
groupName	Name of group where certificate might be pushed to after creation.
<i>String</i>	
certificateAuthority	Name of the Certificate Authority being configured.
<i>String</i>	Possible Values: GlobalSign
globalSignCertificateType	GlobalSign CA certificate type based on the configurations in the CA policy.
<i>String</i>	
connectorName	Name of the connector used for integration with GlobalSign.
<i>String</i>	
certPolicyName	The name of the certificate policy associated with the enrollment process.
<i>String</i>	
validityUnitValue	Validity unit value associated with the validity unit.
<i>String</i>	

Response Structure

- **Status Code:** 200 OK
- **Message:** SUCCESS
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response <i>String</i>	Successfully added policy.
message <i>String</i>	Success message or failure description in case of error.
appStatusCode <i>String</i>	Application specific status code for the response. Will be non-null for failure response.
tags	More info in case of failure response.

Sample Request/Response

Use case: Create a cluster policy template for GlobalSign CA.

Request URL

`https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-issuer-ca-template-add?gwsource=external`

Sample Request

POST Content type: application/json Username: <> Password: <>

```
{
  "payload": {
    "kubeCaSettingName": "globalsign-ca1",
    "clusterPolicy": "cluster-policy",
    "caAccount": "Entrust_Crypto_Mesh_CA",
    "certificateProfile": "Server",
    "validityUnit": "Days",
    "casettingType": "CA Setting Cluster",
    "groupName": "Default",
    "certificateAuthority": "GlobalSign",
    "globalSignCertificateType": "my_certificate_type",
    "connectorName": "connectortname",
    "certPolicyName": "Default",
    "validityUnitValue": "4"
  }
}
```

Sample Response

```
{
  "response": {
    "messageType": "SUCCESS",
    "message": "Successfully added issuer ca template"
  },
  "message": "Successfully added issuer ca template",
  "appStatusCode": "success",
  "tags": null,
  "headers": null
}
```

Reference

Understanding the sample URL:

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsouce:** Source or origin of a gateway, for example: **external**.

GlobalSignAtlas CA

Payload

Name	Description
kubeCaSettingName	Unique name to identify the KUBE CA setting configuration.
String	
clusterPolicy	Cluster policy to which the cluster is associated to
String	
caAccount	Account associated with the CA.
String	
certificateProfile	Type of certificate.
String	Possible Values: Server, Client
groupName	Name of group where certificate might be pushed to after creation.
String	
casettingType	Type of the CA setting type.
String	Possible Values: CA Setting, CA Setting Cluster
certificateAuthority	Name of the Certificate Authority being configured.
String	Possible Values: GlobalSignAtlas
connectorName	Name of the connector used for integration with GlobalSignAtlas.
String	
certPolicyName	The name of the certificate policy associated with the enrollment process.
String	
validityUnit	Validity of the certificate.

Name	Description
<i>String</i>	Possible Values: Days, Months, Years
validityUnitValue	Validity unit value associated with the validity unit.
<i>String</i>	

Response Structure

- **Status Code:** 200 OK
- **Message:** Successful
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response <i>String</i>	Successfully added policy.
message <i>String</i>	Success message or failure description in case of error.
appStatusCode <i>String</i>	Application specific status code for the response. Will be non-null for failure response.
tags	More info in case of failure response.

Sample Request/Response

Use case: Create a cluster policy template for GlobalSign Atlas CA.

Request URL

https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-issuer-ca-template-add?gwsource=external

Sample Request

```
POST Content type: application/json Username: <> Password: <>
{
  "payload": {
```

```

    "kubeCaSettingName": "global-sign-atlas-ca1",
    "clusterPolicy": "cluster-policy",
    "caAccount": "GlobalSignAtlas_Crypto_Mesh_CA",
    "certificateProfile": "Server",
    "groupName": "Default",
    "casettingType": "CA Setting Cluster",
    "certificateAuthority": "GlobalSignAtlas",
    "validityUnit": "Days",
    "connectorName": "connectortname",
    "certPolicyName": "Default",
    "validityUnitValue": "3"
  }
}

```

Sample Response

```

{
  "response": {
    "messageType": "SUCCESS",
    "message": "Successfully added issuer ca template"
  },
  "message": "Successfully added issuer ca template",
  "appStatusCode": "success",
  "tags": null,
  "headers": null
}

```

Reference

Understanding the sample URL:

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsouce:** Source or origin of a gateway, for example: **external**.

GlobalSignMSSL CA

Payload

Name	Description
kubeCaSettingName	Unique name to identify the KUBE CA setting configuration.
String	
clusterPolicy	Cluster policy to which the cluster is associated to
String	
caAccount	Account associated with the CA.
String	
certificateProfile	Type of certificate.
String	Possible Values: Server, Client
validityUnit	Validity of the certificate.
String	Possible Values: Days, Months, Years
casettingType	Type of the CA setting type.

Name	Description
<i>String</i>	Possible Values: CA Setting, CA Setting Cluster
groupName	Name of group where certificate might be pushed to after creation.
<i>String</i>	
certificateAuthority	Name of the Certificate Authority being configured.
<i>String</i>	Possible Values: GlobalSignMSSL
connectorName	Name of the connector used for integration with GlobalSignMSSL.
<i>String</i>	
certPolicyName	The name of the certificate policy associated with the enrollment process.
<i>String</i>	
validityUnitValue	Validity unit value associated with the validity unit.
<i>String</i>	
globalSignMsslProductType	GlobalSignMSSL product type based on the configurations in the CA policy.
<i>String</i>	
globalSignMsslProfileName	GlobalSignMSSL profile name based on the configurations in the CA policy.
<i>String</i>	

Response Structure

- **Status Code:** 200 OK
- **Message:** SUCCESS
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response	Successfully added policy.

Name	Description
<i>String</i>	
message	Success message or failure description in case of error.
<i>String</i>	
appStatusCode	Application specific status code for the response. Will be non-null for failure response.
<i>String</i>	
tags	More info in case of failure response.

Sample Request/Response

Use case: Create a cluster policy template for GlobalSignMSSL CA.

Request URL

`https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-issuer-ca-template-add?gwsources=external`

Sample Request

POST Content type: application/json Username: <> Password: <>

```
{
  "payload": {
    "kubeCaSettingName": "entrust-ca1",
    "clusterPolicy": "cluster-policy",
    "caAccount": "Entrust_Crypto_Mesh_CA",
    "certificateProfile": "Server",
    "validityUnit": "Days",
    "casettingType": "CA Setting Cluster",
    "groupName": "Default",
    "certificateAuthority": "GlobalSignMSSL",
    "connectorName": "connectortname",
    "certPolicyName": "Default",
    "validityUnitValue": "4",
    "globalSignMsslProductType": "my_product_type",
    "globalSignMsslProfileName": "my_profile_name"
  }
}
```

Sample Response

```
{
  "response": {
    "messageType": "SUCCESS",
    "message": "Successfully added issuer ca template"
  },
  "message": "Successfully added issuer ca template",
  "appStatusCode": "success",
  "tags": null,
  "headers": null
}
```

Reference

Understanding the sample URL:

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsouce:** Source or origin of a gateway, for example: **external**.

HashicorpVault CA

Payload

Name	Description
kubeCaSettingName	Unique name to identify the KUBE CA setting configuration.
<i>String</i>	
clusterPolicy	Cluster policy to which the cluster is associated to
<i>String</i>	
caAccount	Account associated with the CA.
<i>String</i>	
certificateProfile	Type of certificate.
<i>String</i>	Possible Values: Server, Client
casettingType	Type of the CA setting type.
<i>String</i>	Possible Values: CA Setting, CA Setting Cluster
groupName	Name of group where certificate might be pushed to after creation.
<i>String</i>	
certificateAuthority	Name of the Certificate Authority being configured.
<i>String</i>	Possible Values: HashicorpVault
connectorName	Name of the connector used for integration with HashicorpVault.
<i>String</i>	
certPolicyName	The name of the certificate policy associated with the enrollment process.
<i>String</i>	
validityHashiCorpvault	Validity unit value associated with the validity unit.

Name	Description
<i>String</i>	
hashiCorpVaultNamespace	HashicorpVault Product type based on the configurations in the CA policy.
<i>String</i>	
hashiCorpVaultSecretEngine	HashicorpVault secret engine based on the configurations in the CA policy.
<i>String</i>	
hashiCorpVaultSecretEngineRole	HashicorpVault secret engine role based on the configurations in the CA policy.
<i>String</i>	

Response Structure

- **Status Code:** 200 OK
- **Message:** SUCCESS
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response	Successfully added policy.
<i>String</i>	
message	Success message or failure description in case of error.
<i>String</i>	
appStatusCode	Application specific status code for the response. Will be non-null for failure response.
<i>String</i>	
tags	More info in case of failure response.

Sample Request/Response

Use case: Create a cluster policy template for HashicorpVault CA.

Request URL

`https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-issuer-ca-template-add?gwsource=external`

Sample Request

POST Content type: application/json Username: <> Password: <>

```
{
  "payload": {
    "kubeCaSettingName": "Hashicorp-ca1",
    "clusterPolicy": "cluster-policy",
    "caAccount": "Entrust_Crypto_Mesh_CA",
    "certificateProfile": "Server",
    "casettingType": "CA Setting Cluster",
    "groupName": "Default",
    "certificateAuthority": "HashicorpVault",
    "connectorName": "connectortname",
    "certPolicyName": "Default",
    "validityHashiCorpVault": "365",
    "hashiCorpVaultNamespace": "containers",
    "hashiCorpVaultSecretEngine": "pki_int",
    "hashiCorpVaultSecretEngineRole": "Server-Certificate"
  }
}
```

Sample Response

```
{
  "response": {
    "messageType": "SUCCESS",
    "message": "Successfully added issuer ca template"
  },
  "message": "Successfully added issuer ca template",
  "appStatusCode": "success",
  "tags": null,
  "headers": null
}
```

Reference

Understanding the sample URL:

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
 - **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsouce:** Source or origin of a gateway, for example: **external**.

InCommon CA

Payload

Name	Description
kubeCaSettingName	Unique name to identify the KUBE CA setting configuration.
<i>String</i>	
clusterPolicy	Cluster policy to which the cluster is associated to
<i>String</i>	
caAccount	Account associated with the CA.
<i>String</i>	

Name	Description
certificateProfile	Type of certificate.
<i>String</i>	Possible Values: Server, Client
casettingType	Type of the CA setting type.
<i>String</i>	Possible Values: CA Setting, CA Setting Cluster
groupName	Name of group where certificate might be pushed to after creation.
<i>String</i>	
certificateAuthority	Name of the Certificate Authority being configured.
<i>String</i>	Possible Values: InCommon
connectorName	Name of the connector used for integration with InCommon.
<i>String</i>	
certPolicyName	The name of the certificate policy associated with the enrollment process.
<i>String</i>	
incommonCertificateType	InCommon certificate type based on the configurations in the CA policy.
<i>String</i>	

Response Structure

- **Status Code:** 200 OK
- **Message:** SUCCESS
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response	Successfully added policy.
<i>String</i>	
message	Success message or failure description in case of error.

Name	Description
<i>String</i>	
appStatusCode	Application specific status code for the response. Will be non-null for failure response.
<i>String</i>	
tags	More info in case of failure response.

Sample Request/Response

Use case: Create a cluster policy template for InCommon CA.

Request URL

<https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-issuer-ca-template-add?gwsource=external>

Sample Request

POST Content type: application/json Username: <> Password: <>

```
{
  "payload": {
    "kubeCaSettingName": "incommon-ca1",
    "clusterPolicy": "cluster-policy",
    "caAccount": "Entrust_Crypto_Mesh_CA",
    "certificateProfile": "Server",
    "casettingType": "CA Setting Cluster",
    "groupName": "Default",
    "certificateAuthority": "InCommon",
    "connectorName": "connectortname",
    "certPolicyName": "Default",
    "incommonCertificateType": "my_certificate_type"
  }
}
```

Sample Response

```
{
  "response": {
    "messageType": "SUCCESS",
    "message": "Successfully added issuer ca template"
  },
}
```

```

"message": "Successfully added issuer ca template",
"appStatusCode": "success",
"tags": null,
"headers": null
}

```

Reference

Understanding the sample URL:

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsouce:** Source or origin of a gateway, for example: **external**.

Nexus CA

Payload

Name	Description
kubeCaSettingName <i>String</i>	Unique name to identify the KUBE CA setting configuration.
clusterPolicy <i>String</i>	Cluster policy to which the cluster is associated to
caAccount <i>String</i>	Account associated with the CA.
certificateProfile <i>String</i>	Type of certificate. Possible Values: Server, Client
casettingType <i>String</i>	Type of the CA setting type. Possible Values: CA Setting, CA Setting Cluster
groupName <i>String</i>	Name of group where certificate might be pushed to after creation.
certificateAuthority <i>String</i>	Name of the Certificate Authority being configured. Possible Values: Nexus
connectorName <i>String</i>	Name of the connector used for integration with Nexus.
certPolicyName <i>String</i>	The name of the certificate policy associated with the enrollment process.
nexusProcedure <i>String</i>	Procedure or method used in Nexus based on the configurations in the CA policy.

Response Structure

- **Status Code:** 200 OK
- **Message:** SUCCESS
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response <i>String</i>	Successfully added policy.
message <i>String</i>	Success message or failure description in case of error.
appStatusCode <i>String</i>	Application specific status code for the response. Will be non-null for failure response.
tags	More info in case of failure response.

Sample Request/Response

Use case: Create a cluster policy template for Nexus CA.

Request URL

`https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-issuer-ca-template-add?gwsource=external`

Sample Request

POST Content type: application/json Username: <> Password: <>

```
{
  "kubeCaSettingName": "nexus-ca",
  "clusterPolicy": "cluster-policy",
  "caAccount": "Nexus_Crypto_Mesh_CA",
  "certificateProfile": "Server",
  "groupName": "Default",
  "casettingType": "CA Setting Cluster",
  "certificateAuthority": "Nexus",
  "connectorName": "connectortname",
  "certPolicyName": "Default",
```



```

"validityUnit": "Days",
"validityUnitValue": "3",
"nexusProcedure": "AppViewX REST Client"
}

```

Sample Response

```

{
  "response": {
    "messageType": "SUCCESS",
    "message": "Successfully added issuer ca template"
  },
  "message": "Successfully added issuer ca template",
  "appStatusCode": "success",
  "tags": null,
  "headers": null
}

```

Reference

Understanding the sample URL:

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi**: Path parameter value (static) that is part of the endpoint's URL
- **Endpoint**: Endpoint of the API, for example: **execute-hook**
- **gwsources**: Source or origin of a gateway, for example: **external**.

Trustwave CA

Payload

Name	Description
kubeCaSettingName	Unique name to identify the KUBE CA setting configuration.
<i>String</i>	
clusterPolicy	Cluster policy to which the cluster is associated to
<i>String</i>	
caAccount	Account associated with the CA.
<i>String</i>	
certificateProfile	Type of certificate.
<i>String</i>	Possible Values: Server, Client
casettingType	Type of the CA setting type.
<i>String</i>	Possible Values: CA Setting, CA Setting Cluster
groupName	Name of group where certificate might be pushed to after creation.
<i>String</i>	
certificateAuthority	Name of the Certificate Authority being configured.
<i>String</i>	Possible Values: Trustwave
validityUnit	Validity of the certificate.
<i>String</i>	Possible Values: Days, Months, Years

Name	Description
connectorName	Name of the connector used for integration with Trustwave.
<i>String</i>	
trustwaveCertificateType	Certificate type of the Trustwave based on the configurations in the CA policy.
<i>String</i>	
certPolicyName	The name of the certificate policy associated with the enrollment process.
<i>String</i>	
validityUnitValue	Validity unit value associated with the validity unit.
<i>String</i>	Possible Values: Days, Months, Years

Response Structure

- **Status Code:** 200 OK
- **Message:** SUCCESS
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response	Successfully added policy.
<i>String</i>	
message	Success message or failure description in case of error.
<i>String</i>	
appStatusCode	Application specific status code for the response. Will be non-null for failure response.
<i>String</i>	
tags	More info in case of failure response.

Sample Request/Response

Use case: Create a cluster policy template for Trustwave CA.

Request URL

`https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-issuer-ca-template-add?gwsource=external`

Sample Request

POST Content type: application/json Username: <> Password: <>

```
{
  "payload": {
    "kubeCaSettingName": "trust-wave-ca1",
    "clusterPolicy": "cluster-policy",
    "caAccount": "TrustWave_Crypto_Mesh_CA",
    "certificateProfile": "Server",
    "groupName": "Default",
    "casettingType": "CA Setting Cluster",
    "certificateAuthority": "Trustwave",
    "validityUnit": "Days",
    "connectorName": "connectorname",
    "trustwaveCertificateType": "SecureTrust Organization Validation",
    "certPolicyName": "Default",
    "validityUnitValue": "4"
  }
}
```

Sample Response

```
{
  "response": {
    "messageType": "SUCCESS",
    "message": "Successfully added issuer ca template"
  },
  "message": "Successfully added issuer ca template",
  "appStatusCode": "success",
  "tags": null,
  "headers": null
}
```

Reference

Understanding the sample URL:

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
 - **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsouce:** Source or origin of a gateway, for example: **external**.

Microsoft Enterprise CA

Payload

Name	Description
kubeCaSettingName	Unique name to identify the KUBE CA setting configuration.
<i>String</i>	
clusterPolicy	Cluster policy to which the cluster is associated to
<i>String</i>	
caAccount	Account associated with the CA.
<i>String</i>	

Name	Description
certificateProfile	Type of certificate.
<i>String</i>	Possible Values: Server, Client
groupName	Name of group where certificate might be pushed to after creation.
<i>String</i>	
casettingType	Type of the CA setting type.
<i>String</i>	Possible Values: CA Setting, CA Setting Cluster
certificateAuthority	Name of the Certificate Authority being configured.
<i>String</i>	Possible Values: Microsoft Enterprise
connectorName	Name of the connector used for integration with Microsoft Enterprise.
<i>String</i>	
mscaenterprise_templateName	Template used in Microsoft enterprise CA based on the configurations in the CA policy.
<i>String</i>	
certPolicyName	The name of the certificate policy associated with the enrollment process.
<i>String</i>	

Response Structure

- **Status Code:** 200 OK
- **Message:** SUCCESS
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response	Successfully added policy.
<i>String</i>	
message	Success message or failure description in case of error.

Name	Description
<i>String</i>	
appStatusCode	Application specific status code for the response. Will be non-null for failure response.
<i>String</i>	
tags	More info in case of failure response.

Sample Request/Response

Use case: Create a cluster policy template for Microsoft Enterprise CA.

Request URL

<https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-issuer-ca-template-add?gwsourc=external>

Sample Request

```
POST Content type: application/json Username: <> Password: <>

{
  "payload": {
    "kubeCaSettingName": "microsoft-enterprise-ca1",
    "clusterPolicy": "cluster-policy",
    "caAccount": "Microsoft_Enterprise_Crypto_Mesh_CA",
    "certificateProfile": "Server",
    "groupName": "Default",
    "casettingType": "CA Setting Cluster",
    "certificateAuthority": "Microsoft Enterprise",
    "connectorName": "connectorname",
    "mscaEnterpriseTemplateName": "WebServer_ServerAndClientAuth",
    "certPolicyName": "Default"
  }
}
```

Sample Response

```
{
  "response": {
    "messageType": "SUCCESS",
    "message": "Successfully added issuer ca template"
  },
}
```

```

"message": "Successfully added issuer ca template",
"appStatusCode": "success",
"tags": null,
"headers": null
}

```

Reference

Understanding the sample URL:

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsouce:** Source or origin of a gateway, for example: **external**.

Microsoft Standalone CA

Payload

Name	Description
kubeCaSettingName	Unique name to identify the KUBE CA setting configuration.
<i>String</i>	
clusterPolicy	Cluster policy to which the cluster is associated to
<i>String</i>	
caAccount	Account associated with the CA.
<i>String</i>	
certificateProfile	Type of certificate.
<i>String</i>	Possible Values: Server, Client
groupName	Name of group where certificate might be pushed to after creation.
<i>String</i>	
casettingType	Type of the CA setting type.
<i>String</i>	Possible Values: CA Setting, CA Setting Cluster
certificateAuthority	Name of the Certificate Authority being configured.
<i>String</i>	Possible Values: Microsoft Standalone
connectorName	Name of the connector used for integration with Microsoft Standalone.
<i>String</i>	
certPolicyName	The name of the certificate policy associated with the enrollment process.
<i>String</i>	

Response Structure

- **Status Code:** 200 OK
- **Message:** SUCCESS

- **Headers:**
 - **Content-Type:** application/json

Name	Description
response <i>String</i>	Successfully added policy.
message <i>String</i>	Success message or failure description in case of error.
appStatusCode <i>String</i>	Application specific status code for the response. Will be non-null for failure response.
tags	More info in case of failure response.

Sample Request/Response

Use case: Create a cluster policy template for Microsoft Standalone CA.

Request URL

`https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-issuer-ca-template-add?gwsouce=external`

Sample Request

POST Content type: application/json Username: <> Password: <>

```
{
  "payload": {
    "kubeCaSettingName": "microsoft-standalone-ca1",
    "clusterPolicy": "cluster-policy",
    "caAccount": "Microsoft_Standalone_Crypto_Mesh_CA",
    "certificateProfile": "Server",
    "groupName": "Default",
    "casettingType": "CA Setting Cluster",
    "certificateAuthority": "Microsoft Standalone",
    "connectorName": "connectortname",
    "certPolicyName": "Default"
  }
}
```

Sample Response

```
{
  "response": {
    "messageType": "SUCCESS",
    "message": "Successfully added issuer ca template"
  },
  "message": "Successfully added issuer ca template",
  "appStatusCode": "success",
  "tags": null,
  "headers": null
}
```

Reference

Understanding the sample URL:

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsouce:** Source or origin of a gateway, for example: **external**.

Google CA

Payload

Name	Description
kubeCaSettingName	Unique name to identify the KUBE CA setting configuration.
String	
clusterPolicy	Cluster policy to which the cluster is associated to
String	
caAccount	Account associated with the CA.
String	
certificateProfile	Type of certificate.
String	Possible Values: Server, Client
groupName	Name of group where certificate might be pushed to after creation.
String	
casettingType	Type of the CA setting type.
String	Possible Values: CA Setting, CA Setting Cluster
certificateAuthority	Name of the Certificate Authority being configured.
String	Possible Values: Google
validityUnit	Validity of the certificate.
String	Possible Values: Days, Months, Years
googleCertificateProfile	Certificate profile of the Google.
String	
googleCertIssuanceType	Certificate issuance type of the Google.

Name	Description
<i>String</i>	
googleIssuerLocation	Issuer location of the Google.
<i>String</i>	
connectorName	Name of the connector used for integration with Google.
<i>String</i>	
certPolicyName	The name of the certificate policy associated with the enrollment process.
<i>String</i>	
google_poolName	Pool name of the Google.
<i>String</i>	
validityUnitValue	Validity unit value associated with the validity unit.
<i>String</i>	

Response Structure

- **Status Code:** 200 OK
- **Message:** SUCCESS
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response	Successfully added policy.
<i>String</i>	
message	Success message or failure description in case of error.
<i>String</i>	
appStatusCode	Application specific status code for the response. Will be non-null for failure response.

Name	Description
<i>String</i>	
tags	More info in case of failure response.

Sample Request/Response

Use case: Create a cluster policy template for Google CA.

Request URL

`https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-issuer-ca-template-add?gwsouce=external`

Sample Request

POST Content type: application/json Username: <> Password: <>

```
{
  "payload": {
    "kubeCaSettingName": "google-ca1",
    "clusterPolicy": "cluster-policy",
    "caAccount": "Google_Crypto_Mesh_CA",
    "certificateProfile": "Server",
    "groupName": "Default",
    "casettingType": "CA Setting Cluster",
    "certificateAuthority": "Google",
    "validityUnit": "Days",
    "googleCertificateProfile": "Server",
    "googleCertIssuanceType": "caPool",
    "googleIssuerLocation": "us-east1",
    "connectorName": "connectorname",
    "certPolicyName": "Default",
    "googlePoolName": "SplunkLab",
    "validityUnitValue": "2"
  }
}
```

Sample Response

```
{
  "response": {
    "messageType": "SUCCESS",
  }
}
```

```

    "message": "Successfully added issuer ca template"
  },
  "message": "Successfully added issuer ca template",
  "appStatusCode": "success",
  "tags": null,
  "headers": null
}

```

Reference

Understanding the sample URL:

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsouce:** Source or origin of a gateway, for example: **external**.

AppViewX PKIaaS CA

Payload

Name	Description
kubeCaSettingName <i>String</i>	Unique name to identify the KUBE CA setting configuration.
clusterPolicy <i>String</i>	Cluster policy to which the cluster is associated to
caAccount <i>String</i>	Account associated with the CA.
certificateProfile <i>String</i>	Type of certificate. Possible Values: Server, Client
casettingType <i>String</i>	Type of the CA setting type. Possible Values: CA Setting, CA Setting Cluster
groupName <i>String</i>	Name of group where certificate might be pushed to after creation.
certificateAuthority <i>String</i>	Name of the Certificate Authority being configured. Possible Values: AppViewX PKIaaS
appviewxpkiassIssuerLocation <i>String</i>	AppViewX PKIaaS issuer location based on the configurations in the CA policy.
appviewxpkiassIssuerName <i>String</i>	AppViewX PKIaaS issuer name based on the configurations in the CA policy.
appviewxpkiassPoolName <i>String</i>	AppViewX PKIaaS pool name based on the configurations in the CA policy.

Name	Description
appviewxpkiaasCertificateProfile	AppViewX PKIaaS certificate profile based on the configurations in the CA policy.
<i>String</i>	
connectorName	Name of the connector used for integration with AppViewX PKIaaS.
<i>String</i>	
certPolicyName	The name of the certificate policy associated with the enrollment process.
<i>String</i>	

Response Structure

- **Status Code:** 200 OK
- **Message:** SUCCESS
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response	Successfully added policy.
<i>String</i>	
message	Success message or failure description in case of error.
<i>String</i>	
appStatusCode	Application specific status code for the response. Will be non-null for failure response.
<i>String</i>	
tags	More info in case of failure response.

Sample Request/Response

Use case: Create a cluster policy template for AppViewX PKIaaS CA.

Request URL

`https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-issuer-ca-template-add?gwsource=external`

Sample Request

POST Content type: application/json Username: <> Password: <>

```
{
  "payload": {
    "kubeCaSettingName": "my_ca_setting",
    "clusterPolicy": "my_policy",
    "caAccount": "my_ca_account",
    "certificateProfile": "Server",
    "casettingType": "CA Setting",
    "groupName": "my_group",
    "certificateAuthority": "AppViewX PKIaaS",
    "appviewxpkiassIssuerLocation": "my_issuer_location",
    "appviewxpkiassIssuerName": "my_issuer_name",
    "appviewxpkiassPoolName": "my_pool_name",
    "appviewxpkiassCertificateProfile": "my_certificate_profile",
    "connectorName": "connectortname",
    "certPolicyName": "Default"
  }
}
```

Sample Response

```
{
  "response": {
    "messageType": "SUCCESS",
    "message": "Successfully added issuer ca template"
  },
  "message": "Successfully added issuer ca template",
  "appStatusCode": "success",
  "tags": null,
  "headers": null
}
```

Reference

Understanding the sample URL:

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.

- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsouce:** Source or origin of a gateway, for example: **external**.

Map Cluster to Issuer CA - Deprecated

This API is used to map a cluster to a specified Issuer CA setting in the AppViewX platform.

This API has been deprecated starting with v2024.2.1.0 release. While it remains available for backward compatibility, its usage is discouraged. Please transition to the [Map Cluster Policy to Use Legacy CA Setting](#) and [Map Cluster Policy Using Policy Central](#) API at the earliest convenience to ensure continued support and access to the latest features.

- **Deprecated Since:** v2024.2.1.0
- **Recommended Alternative:** /kube-cluster-policy-mapping-save
- **Reason for Deprecation:** Enhanced APIs by introducing Policy Central support and enabling High Availability (HA) for Certificate Authority (CA) services.

Request Structure

Endpoint:	/kube-cluster-casetting-add
Type:	POST
Sample URL:	https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-cluster-casetting-add?gwsource=kube To understand the elements of the sample URL, click here .
Headers:	
Content-Type:	application/json

Input Parameter

Name	Description
sessionId <i>Header</i>	(Mandatory) A unique identifier assigned to a user's session upon successful authentication. The session ID remains valid until it expires, and it can contain alphanumeric characters. Type: String Constraints: The session ID is used when username and password are not provided. Example: A1B2c3d4E5F6
gwsource <i>Query</i>	(Mandatory) Source from which the request is triggered. Type: String Example: DataCenterA
payload <i>Body</i>	(Mandatory) Input data for request body in application/json format. For payload details, see Payload section.

Payload

Input Parameter

Name	Description
clusterName <i>String</i>	(Mandatory) Name of the cluster to be mapped with issuer CA.

Input Parameter (continued)

Name	Description
kubeCaSettingName	(Mandatory) Name of the KUBE CA settings name.
String	
selectedNamespaces	The namespace is needed if the Issuer CA is of CASetting type.
String	

Response Structure

- **Status Code:** 200 OK
- **Message:** Successful
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response	Issuer CA Mapped Successfully
String	
message	Success message or failure description in case of error.
String	
appStatusCode	Application specific status code for the response. Will be non-null for failure response.
String	
tags	More info in case of failure response.

Status Codes

Status Codes and Description

HTTP Status code	appStatusCode	Message and Possible remediation
200 OK	NA	Success
400 Bad Request	AVX-VLDTN-001	Mandatory field is missing or invalid values specified - <<field name>>

Status Codes and Description (continued)

HTTP Status code	appStatusCode	Message and Possible remediation
		Possible remediation: Check and ensure that valid value is provided for <<field name>> field in the request.
401 Unauthorized	AVX_GW_003	Authentication failed, reason - Invalid Credentials Possible remediation: Ensure that valid username and password or valid sessionId is provided as the header param.

Sample Request/Response

Use case: Map a cluster to a issuer CA.

Request URL

https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-cluster-casetting-add?gwsource=kube

Sample Request

```
POST Content type: application/json Username: <> Password: <>

{
  "payload": {
    "clusterName": "n3-poc-n10",
    "kubeCaSettingName": "copilot-ns-demo-2",
    "selectedNamespaces": "avx"
  }
}
```

Sample Response

```
{
  "response": {
    "messageType": "SUCCESS",
    "message": "Issuer CA created successfully",
    "status": "Success"
  }
}
```

Reference

Understanding the sample URL: This section provides an explanation of each component of the sample URL structure used in API requests. For quick reference, this section is referenced in all the API topics as **Reference** in this guide.

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsouce:** Source or origin of a gateway, for example: **external**.

What's Next

- [Manage Clusters](#)

Map Cluster Policy to Use Legacy CA Setting

This API is used to map a cluster policy to use a legacy CA settings.

Request Structure

Endpoint:	/kube-cluster-policy-mapping-save
Type:	POST
Sample URL:	https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-cluster-policy-mapping-save?gwsource=kube To understand the elements of the sample URL, click here.
Headers:	
Content-Type:	application/json

Input Parameter

Name	Description
sessionId <i>Header</i>	(Mandatory) A unique identifier assigned to a user's session upon successful authentication. The session ID remains valid until it expires, and it can contain alphanumeric characters. Type: String Constraints: The session ID is used when username and password are not provided. Example: A1B2c3d4E5F6
gwsource <i>Query</i>	(Mandatory) Source from which the request is triggered. Type: String Example: DataCenterA
payload <i>Body</i>	(Mandatory) Input data for request body in application/json format. For payload details, see Payload section.

Payload

Input Parameter

Name	Description
clusterName	(Mandatory) Name of the cluster to be mapped with issuer CA.

Input Parameter (continued)

Name	Description
<i>String</i>	
clusterPolicyName	(Mandatory) Name of the cluster policy.
<i>String</i>	
clusterPolicyType	Type of the cluster policy.
<i>String</i>	Possible Value: Legacy Policy
kubeCaSettingName	Name of the KUBE CA setting.
<i>String</i>	
caSettingType	Type of the CA setting.
<i>String</i>	Possible Values: CA Setting Cluster

Response Structure

- **Status Code:** 200 OK
- **Message:** SUCCESS
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response	Issuer CA Mapped Successfully
<i>String</i>	
message	Success message or failure description in case of error.
<i>String</i>	
appStatusCode	Application specific status code for the response. Will be non-null for failure response.
<i>String</i>	
tags	More info in case of failure response.

Status Codes

Status Codes and Description

HTTP Status code	appStatusCode	Message and Possible remediation
200 OK	NA	Success
400 Bad Request	AVX-VLDTN-001	Mandatory field is missing or invalid values specified - <<field name>> Possible remediation: Check and ensure that valid value is provided for <<field name>> field in the request.
401 Unauthorized	AVX_GW_003	Authentication failed, reason - Invalid Credentials Possible remediation: Ensure that valid username and password or valid sessionId is provided as the header param.

Sample Request/Response

Use case: Map a cluster policy with a legacy CA setting.

Request URL

<https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-cluster-policy-mapping-save?gwsource=kube>

Sample Request

```
POST Content type: application/json Username: <> Password: <>

{
  "payload": {
    "clusterName": "keertan-db-chk",
    "clusterPolicyName": "cluster-policy",
    "clusterPolicyType": "Legacy Policy",
    "kubeCaSettingName": "amazon-private-ca-cluster-wide",
    "caSettingType": "CA Setting Cluster"
  }
}
```

Sample Response

```
{
  "response": {
    "messageType": "SUCCESS",
    "message": "Issuer CA created successfully",
    "status": "Success"
  },
  "message": null,
  "appStatusCode": null,
  "tags": null,
  "headers": null
}
```

Reference

Understanding the sample URL: This section provides an explanation of each component of the sample URL structure used in API requests. For quick reference, this section is referenced in all the API topics as **Reference** in this guide.

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL

- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsource:** Source or origin of a gateway, for example: **external**.

What's Next

- [Push Cluster Policy Mapping to Legacy CA Setting](#)

Map Cluster Policy Using Policy Central

This API is used to map a cluster policy using policy central.

Request Structure

Endpoint:	/kube-cluster-policy-mapping-save
Type:	POST
Sample URL:	https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-cluster-policy-mapping-save? gwsource=kube To understand the elements of the sample URL, click here.
Headers:	
Content-Type:	application/json

Input Parameter

Name	Description
sessionId (Mandatory) Header	A unique identifier assigned to a user's session upon successful authentication. The session ID remains valid until it expires, and it can contain alphanumeric characters. Type: String Constraints: The session ID is used when username and password are not provided. Example: A1B2c3d4E5F6
gwsource (Mandatory) Query	Source from which the request is triggered. Type: String

Input Parameter (continued)

Name	Description
Example: DataCenterA	
payload	(Mandatory) Input data for request body in application/json format. For payload details, see Payload section.
Body	

Payload**Input Parameter**

Name	Description
clusterName	(Mandatory) Name of the cluster to be mapped with issuer CA.
String	
clusterPolicyName	(Mandatory) Name of the cluster policy.
String	
clusterPolicyType	Type of the cluster policy.
String	Possible Value: Policy Central
selectedNamespaces	List of namespaces to be included in the policy.
Object	

Response Structure

- **Status Code:** 200 OK
- **Message:** SUCCESS
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response	Successfully created policy central mapping
String	

Name	Description
message <i>String</i>	Success message or failure description in case of error.
appStatusCode <i>String</i>	Application specific status code for the response. Will be non-null for failure response.
tags	More info in case of failure response.

Status Codes

Status Codes and Description

HTTP Status code	appStatusCode	Message and Possible remediation
200 OK	NA	Success
400 Bad Request	AVX-VLDTN-001	Mandatory field is missing or invalid values specified - <<field name>> Possible remediation: Check and ensure that valid value is provided for <<field name>> field in the request.
401 Unauthorized	AVX_GW_003	Authentication failed, reason - Invalid Credentials Possible remediation: Ensure that valid username and password or valid sessionId is provided as the header param.

Sample Request/Response

Use case: Map a cluster policy using policy central.

Request URL

`https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-cluster-policy-mapping-save?gwsources=kube`

Sample Request

```
POST Content type: application/json Username: <> Password: <>
{
  "payload": {
```

```

"clusterName": "kubepius",

"clusterPolicyName": "api-doc-ns-wide",

"clusterPolicyType": "Policy Central",

"selectedNamespaces": [

    "test"

]

}

}

```

Sample Response

```

{

  "response": {

    "messageType": "SUCCESS",

    "message": "Successfully created policy central mapping"

  },

  "message": "Successfully created policy central mapping",

  "appStatusCode": "success",

  "tags": null,

  "headers": null

}

```

Reference

Understanding the sample URL: This section provides an explanation of each component of the sample URL structure used in API requests. For quick reference, this section is referenced in all the API topics as **Reference** in this guide.

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsource:** Source or origin of a gateway, for example: **external**.

What's Next

- [Push Cluster Policy Mapping to Policy Central CA Setting](#)

Push Issuer CA to Target Cluster - Deprecated

This API is used to deploy the Issuer CA to the target Kubernetes cluster.

This API has been deprecated starting with v2024.2.1.0 release. While it remains available for backward compatibility, its usage is discouraged. Please transition to the [Push Cluster Policy Mapping to Legacy CA Setting](#) and [Push Cluster Policy Mapping to Policy Central CA Setting](#) API at the earliest convenience to ensure continued support and access to the latest features.

- **Deprecated Since:**v2024.2.1.0
- **Recommended Alternative:**/kube-cluster-policy-mapping-push
- **Reason for Deprecation:** Enhanced APIs by introducing Policy Central support and enabling High Availability (HA) for Certificate Authority (CA) services.

Request Structure

Endpoint:	/kube-cluster-casetting-push
Type:	POST

Sample URL:	<code>https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-cluster-casetting-push?gwsource=kube</code>
	To understand the elements of the sample URL, click here .
Headers:	
Content-Type:	application/json

Input Parameter

Name	Description
sessionId (Mandatory) A unique identifier assigned to a user's session upon successful authentication. The session ID remains valid until it expires, and it can contain alphanumeric characters. <i>Header</i> Type: String Constraints: The session ID is used when username and password are not provided. Example: A1B2c3d4E5F6	
gwsource (Mandatory) Source from which the request is triggered. <i>Query</i> Type: String Example: DataCenterA	
payload (Mandatory) Input data for request body in application/json format. For payload details, see Payload section. <i>Body</i>	

Payload

Input Parameter

Name	Description
clusterName <i>String</i>	Name of the cluster associated with the CA Setting template.
kubeCaSettingName <i>String</i>	Name of the CA Setting template created by user.

Input Parameter (continued)

Name	Description
selectedNamespaces	Namespace associated to the CA Setting template
<i>String</i>	 Note: The selectedNamespaces field can be ignored if the CA Setting template has Cluster Wide Policy.

Response Structure

- **Status Code:** 200 OK
- **Message:** Successful
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response	Issuer CA Deployed Successfully
<i>String</i>	
message	Success message or failure description in case of error.
<i>String</i>	
appStatusCode	Application specific status code for the response. Will be non-null for failure response.
<i>String</i>	
tags	More info in case of failure response.

Status Codes

Status Codes and Description

HTTP Status code	appStatusCode	Message and Possible remediation
200 OK	NA	Success
200 FAILURE	KUBEPLUS_0024	Selected Issuer CA is in a state where action cannot be performed. Please check its state

Status Codes and Description (continued)

HTTP Status code	appStatusCode	Message and Possible remediation
400 Bad Request	AVX-VLDTN-001	Mandatory field is missing or invalid values specified - <<field name>> Possible remediation: Check and ensure that valid value is provided for <<field name>> field in the request.
401 Unauthorized	AVX_GW_003	Authentication failed, reason - Invalid Credentials Possible remediation: Ensure that valid username and password or valid sessionId is provided as the header param.

Sample Request/Response

Use case: Push the issuer CA from AppViewX to end cluster.

Request URL

```
https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-cluster-casetting-push?gwsource=kube
```

Sample Request

POST Content type: application/json Username: <> Password: <>

```
{
  "payload": {
    "caSettings": [
      {
        "clusterName": "swat",
        "kubeCaSettingName": "copilot-ns-demo-2",
        "selectedNamespaces": "avx"
      }
    ]
  }
}
```

Sample Response

```
{
  "response": {
```

```

"messageType": "SUCCESS",

"message": "Issuer CA deployed to cluster successfully",

"status": "Success"

}

}

```

Reference

Understanding the sample URL: This section provides an explanation of each component of the sample URL structure used in API requests. For quick reference, this section is referenced in all the API topics as **Reference** in this guide.

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsouce:** Source or origin of a gateway, for example: **external**.

What's Next

- [Revoke Issuer CA from Target Cluster](#)

Push Cluster Policy Mapping to Legacy CA Setting

This API is used to help in deploying policy in cluster of policy central type.

Request Structure

Endpoint:	/kube-cluster-policy-mapping-push
Type:	POST
Sample URL:	https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-cluster-policy-mapping-push? gwsource=kube To understand the elements of the sample URL, click here.
Headers:	
Content-Type:	application/json

Input Parameter

Name	Description
sessionId <i>Header</i>	(Mandatory) A unique identifier assigned to a user's session upon successful authentication. The session ID remains valid until it expires, and it can contain alphanumeric characters. Type: String Constraints: The session ID is used when username and password are not provided. Example: A1B2c3d4E5F6
gwsource <i>Query</i>	(Mandatory) Source from which the request is triggered. Type: String Example: DataCenterA
payload <i>Body</i>	(Mandatory) Input data for request body in application/json format. For payload details, see Payload section.

Payload

Input Parameter

Name	Description
policyName	Name of the cluster poicy.
String	
clusterPolicyType	Type of the cluster policy.
String	Possible Value: Legacy Policy
policyMappingInfos	List containing mapping information for clusters.
Object	
comment	Optional comment provided for the mapping.
String	

Response Structure

- **Status Code:** 200 OK
- **Message:** SUCCESS
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response	Successfully performed action on selected Objects
String	
message	Success message or failure description in case of error.
String	
appStatusCode	Application specific status code for the response. Will be non-null for failure response.
String	

Name	Description
tags	More info in case of failure response.

Status Codes

Status Codes and Description

HTTP Status code	appStatusCode	Message and Possible remediation
200 OK	NA	Success
200 FAILURE	KUBEPLUS_0024	Selected Issuer CA is in a state where action cannot be performed. Please check its state
400 Bad Request	AVX-VLDTN-001	Mandatory field is missing or invalid values specified - <<field name>> Possible remediation: Check and ensure that valid value is provided for <<field name>> field in the request.
401 Unauthorized	AVX_GW_003	Authentication failed, reason - Invalid Credentials Possible remediation: Ensure that valid username and password or valid sessionId is provided as the header param.

Sample Request/Response

Use case: Push the cluster policy mapping to a legacy CA settings.

Request URL

`https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-cluster-policy-mapping-push?gwsources=kube`

Sample Request

POST Content type: application/json Username: <> Password: <>

```
{
  "payload": {
    "policyName": "cluster-policy",
    "clusterPolicyType": "Legacy Policy",
    "policyMappingInfos": [
      {
```

```

    "clusterName": "kubepius",

    "kubeCaSettingName": "amazon-private-ca-cluster-wide",

    "caSettingType": "CA Setting Cluster"

  }

],

"comment": "comment"

}

}

```

Sample Response

```

{
  "response": {
    "messageType": "SUCCESS",
    "message": "Successfully performed action on selected Objects"
  },
  "message": "Successfully performed action on selected Objects",
  "appStatusCode": "success",
  "tags": null,
  "headers": null
}

```

Reference

Understanding the sample URL: This section provides an explanation of each component of the sample URL structure used in API requests. For quick reference, this section is referenced in all the API topics as **Reference** in this guide.

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsource:** Source or origin of a gateway, for example: **external**.

What's Next

- [Revoke Cluster Policy Mapping from Legacy CA Setting](#)
- [Delete Cluster Policy Mapping from Legacy CA Setting](#)

Push Cluster Policy Mapping to Policy Central CA Setting

This API is used to help in deploying policy in cluster of policy central type.

Request Structure

Endpoint:	/kube-cluster-policy-mapping-push
Type:	POST
Sample URL:	https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-cluster-policy-mapping-push? gwsource=kube To understand the elements of the sample URL, click here .
Headers:	
Content-Type:	application/json

Input Parameter

Name	Description
sessionId <i>Header</i>	(Mandatory) A unique identifier assigned to a user's session upon successful authentication. The session ID remains valid until it expires, and it can contain alphanumeric characters. Type: String Constraints: The session ID is used when username and password are not provided. Example: A1B2c3d4E5F6
gwsource <i>Query</i>	(Mandatory) Source from which the request is triggered. Type: String Example: DataCenterA
payload <i>Body</i>	(Mandatory) Input data for request body in application/json format. For payload details, see Payload section.

Payload**Input Parameter**

Name	Description
policyName <i>String</i>	Name of the cluster poicy.
clusterPolicyType <i>String</i>	Type of the cluster policy. Possible Value: Policy Central
policyMappingInfos <i>Object</i>	List containing mapping information for clusters.
comment <i>String</i>	Optional comment provided for the mapping.

Response Structure

- **Status Code:** 200 OK
- **Message:** SUCCESS
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response <i>String</i>	Successfully performed action on selected Objects
message <i>String</i>	Success message or failure description in case of error.
appStatusCode <i>String</i>	Application specific status code for the response. Will be non-null for failure response.
tags	More info in case of failure response.

Status Codes

Status Codes and Description

HTTP Status code	appStatusCode	Message and Possible remediation
200 OK	NA	Success
200 FAILURE	KUBEPLUS_0024	Selected Issuer CA is in a state where action cannot be performed. Please check its state
400 Bad Request	AVX-VLDTN-001	Mandatory field is missing or invalid values specified - <<field name>> Possible remediation: Check and ensure that valid value is provided for <<field name>> field in the request.
401 Unauthorized	AVX_GW_003	Authentication failed, reason - Invalid Credentials

Status Codes and Description (continued)

HTTP Status code	appStatusCode	Message and Possible remediation
		Possible remediation: Ensure that valid username and password or valid sessionId is provided as the header param.

Sample Request/Response

Use case: Push the cluster policy mapping to a legacy CA settings.

Request URL

https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-cluster-policy-mapping-push?gwsource=kube

Sample Request

```
POST Content type: application/json Username: <> Password: <>

{
  "payload": {
    "policyName": "api-doc",
    "clusterPolicyType": "Policy Central",
    "policyMappingInfos": [
      {
        "clusterName": "kubepius"
      }
    ],
    "comment": "comment"
  }
}
```

Sample Response

```
{
  "response": {
    "messageType": "SUCCESS",
    "message": "Successfully performed action on selected Objects"
  },
  "message": "Successfully performed action on selected Objects",
  "appStatusCode": "success",
  "tags": null,
}
```

```
"headers": null
}
```

Reference

Understanding the sample URL: This section provides an explanation of each component of the sample URL structure used in API requests. For quick reference, this section is referenced in all the API topics as **Reference** in this guide.

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsouce:** Source or origin of a gateway, for example: **external**.

What's Next

- [Revoke Cluster Policy Mapping from Policy Central CA Setting](#)
- [Delete Cluster Policy Mapping from Legacy CA Setting](#)

Revoke Issuer CA from Target Cluster

The API is used to revoke the Issuer CA from the target Kubernetes cluster.

This API has been deprecated starting with v2024.2.1.0 release. While it remains available for backward compatibility, its usage is discouraged. Please transition to the [Revoke Cluster Policy Mapping from Legacy CA Setting](#) and [Revoke Cluster Policy Mapping from Policy Central CA Setting](#) API at the earliest convenience to ensure continued support and access to the latest features.

- **Deprecated Since:**v2024.2.1.0
- **Recommended Alternative:**/kube-cluster-policy-mapping-revoke
- **Reason for Deprecation:** Enhanced APIs by introducing Policy Central support and enabling High Availability (HA) for Certificate Authority (CA) services.

Request Structure

Endpoint:	/kube-cluster-casetting-revoke
Type:	POST
Sample URL:	https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-cluster-casetting-revoke?gwsource=kube To understand the elements of the sample URL, click here .
Headers:	
Content-Type:	application/json

Input Parameter

Name	Description
sessionId	(Mandatory) A unique identifier assigned to a user's session upon successful authentication. The session ID remains valid until it expires, and it can contain alphanumeric characters.
Header	Type: String Constraints: The session ID is used when username and password are not provided. Example: A1B2c3d4E5F6
gwsource	(Mandatory) Source from which the request is triggered.
Query	Type: String

Input Parameter (continued)

Name	Description
Example: <code>DataCenterA</code>	
payload	(Mandatory) Input data for request body in application/json format. For payload details, see Payload section .
<i>Body</i>	

Payload**Input Parameter**

Name	Description
clusterName	Name of the cluster associated with the CA Setting template.
<i>String</i>	
kubeCaSettingName	Name of the CA Setting template created by user.
<i>String</i>	
selectedNamespaces	Namespace associated to the CA Setting template
<i>String</i>	


Note: The selectedNamespaces field can be ignored if the CA Setting template has Cluster Wide Policy.

Response Structure

Name	Description
response	The response contains the attributes needed for the CA settings revoke.
<i>String</i>	
message	Success message or failure description in case of error.
<i>String</i>	
appStatusCode	Application specific status code for the response. Will be non-null for failure response.

Name	Description
<i>String</i>	
tags	More info in case of failure response.

Status Codes

Status Codes and Description

HTTP Status code	appStatusCode	Message and Possible remediation
200 OK	NA	Success
200 FAILURE	KUBEPLUS_0024	Selected Issuer CA is in a state where action cannot be performed. Please check its state
400 Bad Request	AVX-VLDTN-001	Mandatory field is missing or invalid values specified - <<field name>> Possible remediation: Check and ensure that valid value is provided for <<field name>> field in the request.
401 Unauthorized	AVX_GW_003	Authentication failed, reason - Invalid Credentials Possible remediation: Ensure that valid username and password or valid sessionId is provided as the header param.

Sample Request/Response

Use case: Push or revoke the CA from AppViewX to end cluster.

Request URL

`https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-cluster-casetting-revoke?gwsources=kube`

Sample Request

```
POST Content type: application/json Username: <> Password: <>
{
  "payload": [
    {
      "clusterName": "poc-n4",
```



```

    "kubeCaSettingName": "test-ca-setting",
    "selectedNamespaces": "absecon"
  }
]
}

```

Sample Response

```

{
  "response": {
    "messageType": "SUCCESS",
    "message": "Issuer CA revoked from cluster successfully",
    "status": "Success"
  },
  "message": null,
  "appStatusCode": null,
  "tags": null,
  "headers": null
}

```

Reference

Understanding the sample URL: This section provides an explanation of each component of the sample URL structure used in API requests. For quick reference, this section is referenced in all the API topics as **Reference** in this guide.

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi**: Path parameter value (static) that is part of the endpoint's URL
- **Endpoint**: Endpoint of the API, for example: **execute-hook**
- **gwsource**: Source or origin of a gateway, for example: **external**.

What's Next

- [Push Issuer CA to Target Cluster - Deprecated](#)

Revoke Cluster Policy Mapping from Legacy CA Setting

The API is used to help in deleting policy object in cluster of policy central type.

Request Structure

Endpoint:	/kube-cluster-policy-mapping-revoke
Type:	POST
Sample URL:	https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-cluster-policy-mapping-revoke? gwsource=kube To understand the elements of the sample URL, click here.
Headers:	
Content-Type:	application/json

Input Parameter

Name	Description
sessionId	(Mandatory) A unique identifier assigned to a user's session upon successful authentication. The session ID remains valid until it expires, and it can contain alphanumeric characters.
Header	
Type:	String
Constraints:	The session ID is used when username and password are not provided.

Input Parameter (continued)

Name	Description
	Example: A1B2c3d4E5F6
gwsource	(Mandatory) Source from which the request is triggered.
<i>Query</i>	Type: String
	Example: DataCenterA
payload	(Mandatory) Input data for request body in application/json format. For payload details, see Payload section.
<i>Body</i>	

Payload**Input Parameter**

Name	Description
policyName	Name of the cluster policy.
<i>String</i>	
clusterPolicyType	Type of the cluster policy.
<i>String</i>	Possible Value: Legacy Policy
policyMappingInfos	List containing mapping information for clusters.
<i>Object</i>	
comment	Optional comment provided for the mapping.
<i>String</i>	

Response Structure

Name	Description
response	Successfully performed action on selected Objects

Name	Description
<i>String</i>	
message	Success message or failure description in case of error.
<i>String</i>	
appStatusCode	Application specific status code for the response. Will be non-null for failure response.
<i>String</i>	
tags	More info in case of failure response.

Status Codes

Status Codes and Description

HTTP Status code	appStatusCode	Message and Possible remediation
200 OK	NA	Success
200 FAILURE	KUBEPLUS_0024	Selected Issuer CA is in a state where action cannot be performed. Please check its state
400 Bad Request	AVX-VLDTN-001	Mandatory field is missing or invalid values specified - <<field name>> Possible remediation: Check and ensure that valid value is provided for <<field name>> field in the request.
401 Unauthorized	AVX_GW_003	Authentication failed, reason - Invalid Credentials Possible remediation: Ensure that valid username and password or valid sessionId is provided as the header param.

Sample Request/Response

Use case: Revoke the cluster policy mapping from a legacy CA setting.

Request URL

<https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-cluster-policy-mapping-revoke?gwsource=kube>

Sample Request

POST Content type: application/json Username: <> Password: <>

```
{
  "payload": {
    "policyName": "cluster-policy",
    "clusterPolicyType": "Legacy Policy",
    "policyMappingInfos": [
      {
        "clusterName": "kubepius",
        "kubeCaSettingName": "amazon-private-ca-cluster-wide",
        "caSettingType": "CA Setting Cluster"
      }
    ],
    "comment": "comment"
  }
}
```

Sample Response

```
{
  "response": {
    "messageType": "SUCCESS",
    "message": "Successfully performed action on selected Objects"
  },
  "message": "Successfully performed action on selected Objects",
  "appStatusCode": "success",
  "tags": null,
  "headers": null
}
```

Reference

Understanding the sample URL: This section provides an explanation of each component of the sample URL structure used in API requests. For quick reference, this section is referenced in all the API topics as **Reference** in this guide.

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.

- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsouce:** Source or origin of a gateway, for example: **external**.

What's Next

- [Push Cluster Policy Mapping to Legacy CA Setting](#)

Revoke Cluster Policy Mapping from Policy Central CA Setting

The API is used to help in deleting policy object in cluster of policy central type.

Request Structure

Endpoint:	/kube-cluster-policy-mapping-revoke
Type:	POST

Sample URL:	<code>https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-cluster-policy-mapping-revoke?gwsource=kube</code> To understand the elements of the sample URL, click here.
Headers:	
Content-Type:	application/json

Input Parameter

Name	Description
sessionId (Mandatory) A unique identifier assigned to a user's session upon successful authentication. The session ID remains valid until it expires, and it can contain alphanumeric characters. <i>Header</i> Type: String Constraints: The session ID is used when username and password are not provided. Example: <code>A1B2c3d4E5F6</code>	
gwsource (Mandatory) Source from which the request is triggered. <i>Query</i> Type: String Example: <code>DataCenterA</code>	
payload (Mandatory) Input data for request body in application/json format. For payload details, see Payload section. <i>Body</i>	

Payload

Input Parameter

Name	Description
policyName <i>String</i>	Name of the cluster policy.
clusterPolicyType <i>String</i>	Type of the cluster policy.

Input Parameter (continued)

Name	Description
Possible Value: Policy Central	
policyMappingInfos	List containing mapping information for clusters.
<i>Object</i>	
comment	Optional comment provided for the mapping.
<i>String</i>	

Response Structure

Name	Description
response	Successfully performed action on selected Objects
<i>String</i>	
message	Success message or failure description in case of error.
<i>String</i>	
appStatusCode	Application specific status code for the response. Will be non-null for failure response.
<i>String</i>	
tags	More info in case of failure response.

Status Codes**Status Codes and Description**

HTTP Status code	appStatusCode	Message and Possible remediation
200 OK	NA	Success
200 FAILURE	KUBEPLUS_0024	Selected Issuer CA is in a state where action cannot be performed. Please check its state
400 Bad Request	AVX-VLDTN-001	Mandatory field is missing or invalid values specified - <<field name>>

Status Codes and Description (continued)

HTTP Status code	appStatusCode	Message and Possible remediation
		Possible remediation: Check and ensure that valid value is provided for <<field name>> field in the request.
401 Unauthorized	AVX_GW_003	Authentication failed, reason - Invalid Credentials Possible remediation: Ensure that valid username and password or valid sessionId is provided as the header param.

Sample Request/Response

Use case: Revoke the cluster policy mapping from a policy central CA setting.

Request URL

https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-cluster-policy-mapping-revoke?gwsource=kube

Sample Request

```
POST Content type: application/json Username: <> Password: <>

{
  "payload": {
    "policyName": "test1234",
    "clusterPolicyType": "Policy Central",
    "policyMappingInfos": [
      {
        "clusterName": "kubepius"
      }
    ],
    "comment": "comment"
  }
}
```

Sample Response

```
{
  "response": {
    "messageType": "SUCCESS",
```

```

    "message": "Successfully performed action on selected Objects"
  },
  "message": "Successfully performed action on selected Objects",
  "appStatusCode": "success",
  "tags": null,
  "headers": null
}

```

Reference

Understanding the sample URL: This section provides an explanation of each component of the sample URL structure used in API requests. For quick reference, this section is referenced in all the API topics as **Reference** in this guide.

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsouce:** Source or origin of a gateway, for example: **external**.

What's Next

- [Push Cluster Policy Mapping to Policy Central CA Setting](#)

Delete Cluster Policy Mapping from Legacy CA Setting

The API is used to help in deleting policy entry in cluster of policy central type.

Request Structure

Endpoint:	/kube-cluster-policy-mapping-delete
Type:	POST
Sample URL:	https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-cluster-policy-mapping-delete? gwsource=kube To understand the elements of the sample URL, click here.
Headers:	
Content-Type:	application/json

Input Parameter

Name	Description
sessionId Header	(Mandatory) A unique identifier assigned to a user's session upon successful authentication. The session ID remains valid until it expires, and it can contain alphanumeric characters. Type: String Constraints: The session ID is used when username and password are not provided. Example: A1B2c3d4E5F6
gwsource Query	(Mandatory) Source from which the request is triggered. Type: String Example: DataCenterA
payload	(Mandatory) Input data for request body in application/json format. For payload details, see Payload section.

Input Parameter (continued)

Name	Description

*Body***Payload****Input Parameter**

Name	Description

policyName
Name of the cluster policy.

String

clusterPolicyType
Type of the cluster policy.

*String***Possible Value:** Legacy Policy

policyMappingInfos
List containing mapping information for clusters.

Object

comment
Optional comment provided for the mapping.

*String***Response Structure**

Name	Description

response
Cluster Issuer CAs deleted successfully

String

message
Success message or failure description in case of error.

String

appStatusCode
Application specific status code for the response. Will be non-null for failure response.

String

Name	Description
tags	More info in case of failure response.

Status Codes

Status Codes and Description

HTTP Status code	appStatusCode	Message and Possible remediation
200 OK	NA	Success
200 FAILURE	KUBEPLUS_0024	Selected Issuer CA is in a state where action cannot be performed. Please check its state
400 Bad Request	AVX-VLDTN-001	Mandatory field is missing or invalid values specified - <<field name>> Possible remediation: Check and ensure that valid value is provided for <<field name>> field in the request.
401 Unauthorized	AVX_GW_003	Authentication failed, reason - Invalid Credentials Possible remediation: Ensure that valid username and password or valid sessionId is provided as the header param.

Sample Request/Response

Use case: Delete the cluster policy mapping from a legacy CA setting.

Request URL

`https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-cluster-policy-mapping-delete?gwsource=kube`

Sample Request

POST Content type: application/json Username: <> Password: <>

```
{
  "payload": {
    "policyName": "cluster_polisy-ms-standalone_ca_caset_clu",
    "clusterPolicyType": "Legacy Policy",
    "policyMappingInfos": [
      {
```

```

    "clusterName": "SDET-Kube-Enroll-K8sIngress-Cluster.appviewx.net1",
    "kubeCaSettingName": "casetting-microsoft-standalone-caset-clu-ud-gp",
    "caSettingType": "CA Setting Cluster"
  }
],
"comment": "comment"
}
}

```

Sample Response

```

{
  "response": {
    "messageType": "SUCCESS",
    "message": "Cluster Issuer CAs deleted successfully"
  },
  "message": null,
  "appStatusCode": "success",
  "tags": null,
  "headers": null
}

```

Reference

Understanding the sample URL: This section provides an explanation of each component of the sample URL structure used in API requests. For quick reference, this section is referenced in all the API topics as **Reference** in this guide.

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsource:** Source or origin of a gateway, for example: **external**.

What's Next

- [Map Cluster Policy to Use Legacy CA Setting](#)

Delete Cluster Policy Mapping from Policy Central CA Setting

The API is used to help in deleting policy entry in cluster of policy central type.

Request Structure

Endpoint:	/kube-cluster-policy-mapping-delete
Type:	POST
Sample URL:	https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-cluster-policy-mapping-delete? gwsource=kube To understand the elements of the sample URL, click here .
Headers:	
Content-Type:	application/json

Input Parameter

Name	Description
sessionId	(Mandatory) A unique identifier assigned to a user's session upon successful authentication. The session ID remains valid until it expires, and it can contain alphanumeric characters.
Header	Type: String
	Constraints: The session ID is used when username and password are not provided.
	Example: A1B2c3d4E5F6
gwsources	(Mandatory) Source from which the request is triggered.
Query	Type: String
	Example: DataCenterA
payload	(Mandatory) Input data for request body in application/json format. For payload details, see Payload section.
Body	

Payload

Input Parameter

Name	Description
policyName	Name of the cluster policy.
String	
clusterPolicyType	Type of the cluster policy.
String	Possible Value: Policy Central
policyMappingInfos	List containing mapping information for clusters.
Object	
comment	Optional comment provided for the mapping.
String	

Response Structure

Name	Description
response <i>String</i>	Successfully deleted all policy mappings
message <i>String</i>	Success message or failure description in case of error.
appStatusCode <i>String</i>	Application specific status code for the response. Will be non-null for failure response.
tags	More info in case of failure response.

Status Codes

Status Codes and Description

HTTP Status code	appStatusCode	Message and Possible remediation
200 OK	NA	Success
200 FAILURE	KUBEPLUS_0024	Selected Issuer CA is in a state where action cannot be performed. Please check its state
400 Bad Request	AVX-VLDTN-001	Mandatory field is missing or invalid values specified - <<field name>> Possible remediation: Check and ensure that valid value is provided for <<field name>> field in the request.
401 Unauthorized	AVX_GW_003	Authentication failed, reason - Invalid Credentials Possible remediation: Ensure that valid username and password or valid sessionId is provided as the header param.

Sample Request/Response

Use case: Delete the cluster policy mapping from a policy central CA setting.

Request URL

```
https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-cluster-policy-mapping-delete?gwsource=kube
```

Sample Request

POST Content type: application/json Username: <> Password: <>

```
{
  "payload": {
    "policyName": "test1234",
    "clusterPolicyType": "Policy Central",
    "policyMappingInfos": [
      {
        "clusterName": "kubepius"
      }
    ],
    "comment": "comment"
  }
}
```

Sample Response

```
{
  "response": {
    "messageType": "SUCCESS",
    "message": "Successfully deleted all policy mappings"
  },
  "message": "Successfully deleted all policy mappings",
  "appStatusCode": "success",
  "tags": null,
  "headers": null
}
```

Reference

Understanding the sample URL: This section provides an explanation of each component of the sample URL structure used in API requests. For quick reference, this section is referenced in all the API topics as **Reference** in this guide.

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
 - **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsource:** Source or origin of a gateway, for example: **external**.

What's Next

- [Map Cluster Policy Using Policy Central](#)

Create Cert CRD Instance in Cluster

The API is used to create and enroll a certificate in a cluster by adding a certificate CRD.

Request Structure

Endpoint:	/kube-add-cert-crd-instance
Type:	POST
Sample URL:	https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-add-cert-crd-instance?gwsource=kube

To understand the elements of the sample URL, click here .	
Headers:	
Content-Type:	application/json

Input Parameter

Name	Description
sessionId	(Mandatory) A unique identifier assigned to a user's session upon successful authentication. The session ID remains valid until it expires, and it can contain alphanumeric characters.
Header	Type: String
	Constraints: The session ID is used when username and password are not provided.
	Example: A1B2c3d4E5F6
gwsource	(Mandatory) Source from which the request is triggered.
Query	Type: String
	Example: DataCenterA
payload	(Mandatory) Input data for request body in application/json format. For payload details, see Payload section.
Body	

Payload

Input Parameter

Name	Description
policyName	Name of the cluster policy.
String	
enrollCertTo	Target resource where the certificate will be enrolled.
String	
clusterName	Name of the cluster where the certificate will be enrolled.

Input Parameter (continued)

Name	Description
<i>String</i>	
caSettingType	Type of CA setting.
<i>String</i>	Possible Values: CA Setting Cluster, ClusterPolicy.
caSettingName	Name of the CA setting to use for certificate issuance.
<i>String</i>	
namespace	Namespace where the certificate resource or secret will be created.
<i>String</i>	
certName	Name assigned to the certificate CRD instance.
<i>String</i>	
autoRenew	Specifies whether auto-renewal of the certificate is enabled.
<i>String</i>	Possible Values: True, False .
commonName	Common Name for the certificate subject.
<i>String</i>	
overwrite	Whether to overwrite any existing certificate CRD instance with the same name.
<i>Boolean</i>	
bitLength	Key length of the certificate.
<i>String</i>	For example: 2048.
renewalPolicy	Specifies the renewal policy.
<i>String</i>	For example: Regenerate New Key.
issueWaitPeriod	Maximum time to wait for certificate issuance.

Input Parameter (continued)

Name	Description
<i>String</i>	For sexample: 24h
certificateAuthority	Name of the issuing Certificate Authority
<i>String</i>	
secretName	Name of the Kubernetes secret where the certificate will be stored.
<i>String</i>	
deployTrustStore	Indicates whether to deploy the trust store.
<i>String</i>	Possible values: Yes, No.
isAdvancedOptions	Whether advanced options are enabled.
<i>String</i>	Possible values: True, False
customSecret	Indicates if a custom secret should be used.
<i>String</i>	Possible values: Yes, No.
csrGenerationSource	Source for CSR generation.
<i>String</i>	For example: K8s Secret, AppViewX.
isCaRequired	Whether the CA certificate is required as part of the enrollment.
<i>String</i>	
keyType	Key algorithm type.
<i>String</i>	For example: RSA.
isOverwriteValidCertificate	Specifies if a valid existing certificate should be overwritten.
<i>String</i>	
certificateCategory	Specifies the certificate category.
<i>String</i>	For example: Server.

Response Structure

Name	Description
response <i>String</i>	Cert added successfully
message <i>String</i>	Success message or failure description in case of error.
appStatusCode <i>String</i>	Application specific status code for the response. Will be non-null for failure response.
tags	More info in case of failure response.

Status Codes

Status Codes and Description

HTTP Status code	appStatusCode	Message and Possible remediation
200 OK	NA	Success
200 FAILURE	KUBEPLUS_0024	Selected Issuer CA is in a state where action cannot be performed. Please check its state
400 Bad Request	AVX-VLDTN-001	Mandatory field is missing or invalid values specified - <<field name>> Possible remediation: Check and ensure that valid value is provided for <<field name>> field in the request.
401 Unauthorized	AVX_GW_003	Authentication failed, reason - Invalid Credentials Possible remediation: Ensure that valid username and password or valid sessionId is provided as the header param.

Sample Request/Response

Use case 1: Create Cert CRD instance in cluster using Amazon Private CA.

Request URL

`https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-add-cert-crd-instance?gwsource=kube`

Sample Request

POST Content type: application/json Username: <> Password: <>

```
{
  "payload": {
    "policyName": "cluster-policy",
    "enrollCertTo": "Secret",
    "clusterName": "kubepius",
    "caSettingType": "CA Setting Cluster",
    "caSettingName": "amazon-private-ca-cluster-wide",
    "namespace": "namespace",
    "certName": "cert-name",
    "autoRenew": "False",
    "commonName": "common-name",
    "overwrite": false,
    "bitLength": "2048",
    "renewalPolicy": "Regenerate New Key",
    "issueWaitPeriod": "24h",
    "certificateAuthority": "Amazon Private CA",
    "secretName": "secret-name",
    "deployTrustStore": "No",
    "isAdvancedOptions": "False",
    "customSecret": "No",
    "csrGenerationSource": "K8s Secret",
    "isCaRequired": "False",
    "keyType": "RSA",
    "isOverwriteValidCertificate": "False",
    "certificateCategory": "Server"
  }
}
```

Sample Response

```
{
  "response": {
    "messageType": "SUCCESS",
  }
}
```



```

    "message": "Cert added successfully"
  },
  "message": "Cert added successfully",
  "appStatusCode": "success",
  "tags": null,
  "headers": null
}

```

Use case 2: Create Cert CRD instance in cluster using the AppViewX CA-1 template.

Request URL

<https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-add-cert-crd-instance?gwsources=kube>

Sample Request

POST Content type: application/json Username: <> Password: <>

```

{
  "payload": {
    "policyName": "api-doc-ns-wide",
    "templateName": "AppViewX CA-1",
    "enrollCertTo": "Secret",
    "clusterName": "keertan",
    "caSettingType": "ClusterPolicy",
    "namespace": "test1",
    "certName": "common-name-policy-centra2",
    "autoRenew": "False",
    "commonName": "common-name",
    "overwrite": false,
    "bitLength": "2048",
    "issueWaitPeriod": "24h",
    "clusterPolicyType": "Policy Central",
    "certificateAuthority": "AppViewX",
    "secretName": "secret-name",
    "deployTrustStore": "No",
    "isAdvancedOptions": "False",
    "hashFunction": "SHA160",
    "customSecret": "No",
    "csrGenerationSource": "AppViewX",
    "isCaRequired": "False",
    "keyType": "RSA"
  }
}

```

```
}
}
```

Sample Response

```
{
  "response": {
    "messageType": "SUCCESS",
    "message": "Cert added successfully"
  },
  "message": "Cert added successfully",
  "appStatusCode": "success",
  "tags": null,
  "headers": null
}
```

Reference

Understanding the sample URL: This section provides an explanation of each component of the sample URL structure used in API requests. For quick reference, this section is referenced in all the API topics as **Reference** in this guide.

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi**: Path parameter value (static) that is part of the endpoint's URL
- **Endpoint**: Endpoint of the API, for example: **execute-hook**
- **gwsource**: Source or origin of a gateway, for example: **external**.

Get CA Settings YAML

This API is used to get the CA settings YAML for the Kubernetes clusters.

Request Structure

Endpoint:	/kube-get-casetting-yaml
Type:	POST
Sample URL:	https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-get-casetting-yaml?gwsource=kube To understand the elements of the sample URL, click here .
Headers:	
Content-Type:	application/json

Input Parameter

Name	Description
sessionId	(Mandatory) A unique identifier assigned to a user's session upon successful authentication. The session ID remains valid until it expires, and it can contain alphanumeric characters.
Header	
	Type: String
	Constraints: The session ID is used when username and password are not provided.
	Example: A1B2c3d4E5F6
gwsource	(Mandatory) Source from which the request is triggered.
Query	
	Type: String
	Example: DataCenterA

Input Parameter (continued)

Name	Description
payload <i>Body</i>	(Mandatory) Input data for request body in application/json format. For payload details, see Payload section.

Payload**Input Parameter**

Name	Description
clusterName <i>String</i>	Name of the cluster associated with the CA Setting template.
kubeCaSettingName <i>String</i>	Name of the CA Setting template created by user.
clusterPolicy <i>String</i>	Name of the cluster policy.
selectedNamespaces <i>String</i>	Namespace associated to the CA Setting template

 **Note:** Namespace value will be blank "" if the CA Setting template has Cluster Wide Policy. Otherwise actual namespace value.

Response Structure

Name	Description
response <i>String</i>	Successful response
message <i>String</i>	Success message or failure description in case of error.
appStatusCode	Application specific status code for the response. Will be non-null for failure response.

Name	Description
<i>String</i>	
tags	More info in case of failure response.

Status Codes

Status Codes and Description

HTTP Status code	appStatusCode	Message and Possible remediation
200 OK	NA	Success
200 FAILURE	KUBEPLUS_0024	Selected Issuer CA is in a state where action cannot be performed. Please check its state
400 Bad Request	AVX-VLDTN-001	Mandatory field is missing or invalid values specified - <<field name>> Possible remediation: Check and ensure that valid value is provided for <<field name>> field in the request.
401 Unauthorized	AVX_GW_003	Authentication failed, reason - Invalid Credentials Possible remediation: Ensure that valid username and password or valid sessionId is provided as the header param.

Sample Request/Response

Use case: Retrieve the CA settings YAML for the Kubernetes clusters.

Request URL

`https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-get-casetting-yaml?gwsources=kube`

Sample Request

```
POST Content type: application/json Username: <> Password: <>{
{
  "payload": {
    "clusterName": "avx-appworld.com",
    "kubeCaSettingName": "appviewx-ca-demo",
```

```

"clusterPolicy": "default-namespace-policy",

"selectedNamespaces": "avx"

}

}

```

Sample Response

```

{
  "response": {
    "messageType": "SUCCESS",
    "message": "Retrieved CA settings YAML successfully",
    "status": "Success"
  },
  "message": null,
  "appStatusCode": null,
  "tags": null,
  "headers": null
}

```

Reference

Understanding the sample URL: This section provides an explanation of each component of the sample URL structure used in API requests. For quick reference, this section is referenced in all the API topics as **Reference** in this guide.

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi**: Path parameter value (static) that is part of the endpoint's URL
- **Endpoint**: Endpoint of the API, for example: **execute-hook**
- **gwsource**: Source or origin of a gateway, for example: **external**.

What's Next

- [Push Issuer CA to Target Cluster - Deprecated](#)

Enroll Certificate to K8s Secret

This API is used to create certificate yaml which will be deployed in cluster.

Request Structure

Endpoint:	/execute-hook
Type:	POST
Sample URL:	https://<IP/HostName/TenantName>:<GWPORT>/avxapi/execute-hook?gwsource=external To understand the elements of the sample URL, click here .
Headers:	
Content-Type:	application/json

Input Parameter

Name	Description
Token	(Mandatory) A unique token assigned to a user. Required if session ID is not provided.
<i>Header</i>	Type: String
sessionId	(Mandatory) A unique identifier assigned to a user's session upon successful authentication. The session ID remains valid until it expires, and it can contain alphanumeric characters.
<i>Header</i>	Type: String

Input Parameter (continued)

Name	Description
	Constraints: The session ID is used when username and password are not provided. Example: A1B2c3d4E5F6
gwsources (Mandatory)	Source from which the request is triggered.
<i>Query</i>	Type: String Example: DataCenterA
payload (Mandatory)	Input data for request body in application/json format. For payload details.
<i>Body</i>	

Payload**Payload Details**

Name	Description
hook	Contains all the hook params. See Table 266: Hook Details for more details.
<i>Object</i>	
input	Contains all the input params. See Table 267: Input Details for more details.
<i>Object</i>	

Hook Details

Name	Description
name	(Mandatory) Name of the hook.
<i>String</i>	

Input Details

Name	Description
action	(Mandatory) Specific action to be performed.

Input Details (continued)

Name	Description
<i>String</i>	
payload	Contains all the payload params.
<i>payload</i>	

Payload Parameter

Name	Description
enrollCertTo	Endpoint where the cert is to be deployed.
<i>String</i>	Possible Values: Secret, Pod
objectFormat	Required if enrollCertTo is Pod.
<i>String</i>	Possible Values: pem, jks, pfs, p12
objectEncoding	Required if enrollCertTo is Pod.
<i>String</i>	Possible Values: utf-8, hex, base64
clusterName	(Mandatory) Name of the Cluster.
<i>String</i>	
caSettingType	Type of CA settings.
<i>String</i>	Possible Values: CA Setting, CA Setting Cluster
caSettingName	Unique name to identify the KUBE CA setting configuration.
<i>String</i>	
namespace	Kubernetes namespace for the certificate.
<i>String</i>	
certName	Name of the certificate.
<i>String</i>	

Payload Parameter (continued)

Name	Description
secretName	Name of the secret to store the certificate.
<i>String</i>	
autoRenew	Auto-renewal is enabled or disabled.
<i>String</i>	Possible Values: True, False
renewalPolicy	Required if autoRenew is True.
<i>String</i>	Possible Values: Regenerate New Key, Renew with Existing Key
issueWaitPeriod	Waiting period for issuing a new certificate.
<i>String</i>	Example: 24h
csrGenerationSource	Location where CSR is generated from.
<i>String</i>	Possible Values: K8s Secret, AppViewX
commonName	Common name for the certificate.
<i>String</i>	
sanName	SAN type.
<i>String</i>	
keyType	Type of key used.
<i>String</i>	Possible Values: RSA, ECDSA
bitLength	Bit length for the key. If keyType is RSA, the possible values: 2048, 3072, 4096, 7680, 8192.
<i>String</i>	If keyType is ECDSA, possible values: 256, 384, 521.
source	Source from which the enrollment request is made.
	Possible Value: api

Response Structure

- **Status Code:** 200 OK
- **Message:** Successful
- **Headers:**
 - **Content-Type:** application/json

Name	Description
response <i>String</i>	Cluster onboarded successfully
message <i>String</i>	Success message or failure description in case of error.
appStatusCode <i>String</i>	Application specific status code for the response. Will be non-null for failure response.
tags	More info in case of failure response.

Status Codes

Status Codes and Description

HTTP Status code	appStatusCode	Message and Possible remediation
200 OK	NA	Success
400 Bad Request	AVX-VLDTN-001	Mandatory field is missing or invalid values specified - <<field name>> Possible remediation: Check and ensure that valid value is provided for <<field name>> field in the request.
401 Unauthorized	AVX_GW_003	Authentication failed, reason - Invalid Credentials Possible remediation: Ensure that valid username and password or valid sessionId is provided as the header param.

Sample Request/Response

Use case: Enroll a TLS certificates in a Kubernetes environment.

Request URL

```
https://<IP/HostName/TenantName>:<GWPORT>/avxapi/execute-hook?gwsource=external
```

Sample Request

POST Content type: application/json Username: <> Password: <>

```
{
  "payload": {
    "hook": {
      "name": "Kube Enroll Cert"
    },
    "input": {
      "action": "string",
      "payload": {
        "enrollCertTo": "Secret",
        "objectFormat": "pem",
        "objectEncoding": "utf-8",
        "clusterName": "n3-poc-n10",
        "caSettingType": "CA Setting Cluster",
        "caSettingName": "copilot-demo-3",
        "namespace": "avx",
        "certName": "copilot-demo",
        "secretName": "copilot-demo",
        "autoRenew": "False",
        "renewalPolicy": "Regenerate New Key",
        "issueWaitPeriod": "24h",
        "csrGenerationSource": "K8s Secret",
        "commonName": "testing",
        "sanName": "DNS",
        "keyType": "RSA",
        "bitLength": 2048,
        "source": "api"
      }
    }
  }
}
```

Sample Response

```
{
  "response": {
    "status": "Success",
    "output": {
      "status": "Success",
      "response": "Certificate added successfully"
    }
  }
}
```

Reference

Understanding the sample URL: This section provides an explanation of each component of the sample URL structure used in API requests. For quick reference, this section is referenced in all the API topics as **Reference** in this guide.

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsouce:** Source or origin of a gateway, for example: **external**.

What's Next

- Generate or Download the Secret YAML

Push Create Certificate to the End Cluster

The API will push or revoke the Certificate from AppViewX to end cluster.

Request Structure

Endpoint:	/kube-cert-action
Type:	POST
Sample URL:	https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-cert-action?gwsource=external To understand the elements of the sample URL, click here .
Headers:	
Content-Type:	application/json

Input Parameter

Name	Description
sessionId	(Mandatory) A unique identifier assigned to a user's session upon successful authentication. The session ID remains valid until it expires, and it can contain alphanumeric characters.
Header	Type: String Constraints: The session ID is used when username and password are not provided. Example: A1B2c3d4E5F6
gwsource	(Mandatory) Source from which the request is triggered.
Query	Type: String Example: DataCenterA
payload	(Mandatory) Input data for request body in application/json format. For payload details, see Payload section.
Body	

Payload

Name	Description
action	Action to be performed.
String	
certs	Details of the certificates to be created. See Table 271: Cert Details for details.
object	

Cert Details

Name	Description
certName	Name of the certificate.
String	
caSettingType	CA type of the issuer CA.
String	Constraints: The values are CA Setting Cluster and CA Setting.
caSettingName	Name of the issuer CA.
String	
clusterName	Name of cluster in which the certificate-related action needs to be performed.
String	
namespace	Namespace where the CA setting must be pushed.
String	

Status Codes

Status Codes and Description

HTTP Status code	appStatusCode	Message and Possible remediation
200 OK	NA	Success
400 Bad Request	KUBEPLUS-0017	Mandatory field is missing or invalid values specified - <<field name>>

Status Codes and Description (continued)

HTTP Status code	appStatusCode	Message and Possible remediation
		Possible remediation: Check and ensure that valid value is provided for <<field name>> field in the request.
401 Unauthorized	AVX_GW_003	Authentication failed, reason - Invalid Credentials Possible remediation: Ensure that valid username and password or valid sessionId is provided as the header param.

Sample Request/Response

Use case: Revoke the certificate from AppViewX to end cluster.

Request URL

https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-cert-action?gwsource=kube

Sample Request

```
{
  "payload": {
    "certs": [
      {
        "certName": "copilot-demo",
        "caSettingType": "CA Setting Cluster",
        "caSettingName": "copilot-demo-3",
        "clusterName": "n3-poc-n10",
        "namespace": "avx"
      }
    ],
    "action": "create"
  }
}
```

Sample Response

```
{
  "response": {
    "messageType": "SUCCESS",
  }
}
```



```

"message": "Certificate deployed to secret successfully",
"status": "Success"
}
}

```

Reference

Understanding the sample URL: This section provides an explanation of each component of the sample URL structure used in API requests. For quick reference, this section is referenced in all the API topics as **Reference** in this guide.

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.

- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsouce:** Source or origin of a gateway, for example: **external**.

What's Next

- Upgrade Cluster Command

TrustStore Content Download

This API will retrieve trust store certificate content from a specified Certificate Authority (CA). It is triggered by the Cert-Orchestrator to dynamically fetch trusted CA certificates needed for trust store creation or updates.

Request Structure

Endpoint:	/kube-trust-store-download
Type:	POST
Sample URL:	https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-trust-store-download?gwsource=external To understand the elements of the sample URL, click here .
Headers:	
Content-Type:	application/json

Input Parameter

Name	Description
sessionId	(Mandatory) A unique identifier assigned to a user's session upon successful authentication. The session ID remains valid until it expires, and it can contain alphanumeric characters.
Header	Type: String Constraints: The session ID is used when username and password are not provided. Example: A1B2c3d4E5F6
gwsource	(Mandatory) Source from which the request is triggered.
Query	Type: String Example: DataCenterA
payload	(Mandatory) Input data for request body in application/json format. For payload details, see Payload section.
Body	

Payload

Name	Description
kubeCACertDownloadRequests	Details of the CA certificates to be downloaded. See kubeCACertDownloadRequests .
Object	

kubeCACertDownloadRequests

Name	Description
certificateAuthority	The name of the certificate authority. For example: AppViewX.
String	
commonName	(Mandatory) The common name of the certificate. For example: AppViewX Intermediate CA.
String	
category	(Mandatory) The category of the certificate. For example: Intermediate CA.
String	
serialNumbers	A list of valid serial numbers to identify specific certificates. If you use <code>*</code> instead of specific serial numbers, it means all serial numbers that match the given certificate authority (CA) configuration will be considered.
String	
intermediateChainRequired	(Optional) The requirement of the intermediate certificate chain.
boolean	

Status Codes

Status Codes and Description

HTTP Status code	appStatusCode	Message and Possible remediation
200 OK	NA	Success
400 Bad Request	KUBEPLUS-0017	Mandatory field is missing or invalid values specified - <<field name>>

Status Codes and Description (continued)

HTTP Status code	appStatusCode	Message and Possible remediation
		Possible remediation: Check and ensure that valid value is provided for <<field name>> field in the request.
401 Unauthorized	AVX_GW_003	Authentication failed, reason - Invalid Credentials Possible remediation: Ensure that valid username and password or valid sessionId is provided as the header param.

Sample Request/Response

Use case: Revoke the certificate from AppViewX to end cluster.

Request URL

https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-trust-store-download?gwsource=kube

Sample Request

```
{
  "payload": {
    "kubeCACertDownloadRequests": [
      {
        "certificateAuthority": "AppViewX",
        "commonName": "AppViewX Intermediate CA",
        "category": "Intermediate CA",
        "serialNumbers": ["01"],
        "intermediateChainRequired": false
      }
    ]
  }
}
```

Sample Response

```
{
  "response": {
    "trustStoreContent": "-----BEGIN CERTIFICATE-----\nMIIEJDCCAwygAwIBAgIRAN7QoflGw4yH0cdjMZLPhZYwDQYJKoZIh\n-----END CERTIFICATE-----\n",
    "failureReasons": []
  }
}
```

```

},
"message": "Successfully retrieved trustStore from AppViewX",
"appStatusCode": "success",
"tags": null,
"headers": null
}

```

Reference

Understanding the sample URL: This section provides an explanation of each component of the sample URL structure used in API requests. For quick reference, this section is referenced in all the API topics as **Reference** in this guide.

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsources:** Source or origin of a gateway, for example: **external**.

What's Next

- [Save TrustStore Template](#)

Save TrustStore Template

The API will create and update the truststore bundle configuration and this consist of target and source configuration info.

Request Structure

Endpoint:	/kube-save-truststore-template
Type:	POST
Sample URL:	https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-save-truststore-template?gwsource=external To understand the elements of the sample URL, click here .
Headers:	
Content-Type:	application/json

Input Parameter

Name	Description
sessionId	(Mandatory) A unique identifier assigned to a user's session upon successful authentication. The session ID remains valid until it expires, and it can contain alphanumeric characters.
Header	Type: String Constraints: The session ID is used when username and password are not provided. Example: A1B2c3d4E5F6
gwsource	(Mandatory) Source from which the request is triggered.
Query	Type: String Example: DataCenterA
payload	(Mandatory) Input data for request body in application/json format. For payload details, see Payload section.
Body	

Payload

Name	Description
name	Name of the trust store template.
<i>String</i>	
targetClean	Indicates that existing content in the target Kubernetes Secrets and ConfigMaps should be cleared or not before storing the new trust store. The possible values are:
<i>Boolean</i>	• true • false
kind	Specifies the type of trust store being created.
<i>String</i>	
appviewxSourceDataList	Details of the the certificate sources to be included in the trust store. See appviewxSourceDataList .
<i>Object</i>	
secrets	Details of the secrete the where the trust store will be saved. See appviewxSourceDataList .
<i>Object</i>	
configMaps	Details of the configMaps the where the trust store will be saved. See appviewxSourceDataList .
<i>Object</i>	

appviewxSourceDataList

Name	Description
certificateAuthority	The name of the certificate authority. For example: AppViewX.
<i>String</i>	
category	The category of the certificate. The optiones are:
<i>String</i>	• Intermediate CA • Root CA

appviewxSourceDataList (continued)

Name	Description
commonName <i>String</i>	The common name of the certificate. For example: AppViewX Intermediate CA.
serialNumbers <i>String</i>	A list of valid serial numbers to identify specific certificates. If you use <code>*</code> instead of specific serial numbers, it means all serial numbers that match the given certificate authority (CA) configuration will be considered.
intermediateChainRequired <i>boolean</i>	The requirement of the intermediate certificate chain.

secrets

Name	Description
name <i>String</i>	The name of the secret.
namespaces <i>String</i>	List of valid namespaces. Either provide the exact name or use regex (for example: truststore.*).
keyName <i>String</i>	The keyName is used as key to store truststore certificate content as that key value in configmap.

configMaps

Name	Description
name <i>String</i>	The name of the secret.
namespaces <i>String</i>	List of valid namespaces. Either provide the exact name or use regex (for example: truststore.*).

configMaps (continued)

Name	Description
keyName <i>String</i>	keyName is used as key to store truststore certificate content as that key value in configmap/secret.

Status Codes**Status Codes and Description**

HTTP Status code	appStatusCode	Message and Possible remediation
200 OK	NA	Success
400 Bad Request	KUBEPLUS-0017	Mandatory field is missing or invalid values specified - <<field name>> Possible remediation: Check and ensure that valid value is provided for <<field name>> field in the request.
401 Unauthorized	AVX_GW_003	Authentication failed, reason - Invalid Credentials Possible remediation: Ensure that valid username and password or valid sessionId is provided as the header param.

Sample Request/Response

Use case: Revoke the certificate from AppViewX to end cluster.

Request URL

`https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-save-truststore-template?gwsource=kube`

Sample Request

```
{
  "payload":{
    "name": "truststore-1",
    "targetClean": true,
    "kind": "TrustStoreCluster",
    "appviewxSourceDataList": [
      {
```

```

    "certificateAuthority" : "Amazon",
    "category" : "Root CA",
    "commonName" : "Amazon Root CA 4",
    "serialNumbers" : [
        "06:6C:9F:D7:C1:BB:10:4C:29:43:E5:71:7B:7B:2C:C8:1A:C1:0E"
    ],
    "intermediateChainRequired" : false
},
{
    "certificateAuthority" : "AppViewX",
    "category" : "Intermediate CA",
    "commonName" : "AppViewX Intermediate CA",
    "serialNumbers" : [
        "08:E5:54:A0:54:44:1B:29:CC:E3:ED:87:B8:7D:98:AD"
    ],
    "intermediateChainRequired" : true
}
],
"secrets" : [
    {
        "name" : "secret1",
        "namespaces" : [
            "truststore-ns-1"
        ],
        "keyName" : "truststoreContent"
    }
],
"configMaps" : [
    {
        "name" : "configmap1",
        "namespaces" : [
            "truststore-ns-1"
        ],
        "keyName" : "truststoreContent"
    }
]

```

```
}
}
```

Sample Response

```
{
  "response": {
    "messageType": "SUCCESS",
    "message": "Trust store updated successfully"
  },
  "message": "Trust store updated successfully",
  "appStatusCode": "success",
  "tags": null,
  "headers": null
}
```

Reference

Understanding the sample URL: This section provides an explanation of each component of the sample URL structure used in API requests. For quick reference, this section is referenced in all the API topics as **Reference** in this guide.

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.

- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi**: Path parameter value (static) that is part of the endpoint's URL
- **Endpoint**: Endpoint of the API, for example: **execute-hook**
- **gwsource**: Source or origin of a gateway, for example: **external**.

What's Next

- [TrustStore Content Download](#)

Push TrustStore Bundle to Cluster

The API will deploy truststore bundle in cluster.

Request Structure

Endpoint:	/kube-truststore-push
Type:	POST
Sample URL:	https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-truststore-push?gwsource=external To understand the elements of the sample URL, click here .
Headers:	
Content-Type:	application/json

Input Parameter

Name	Description
sessionId	(Mandatory) A unique identifier assigned to a user's session upon successful authentication. The session ID remains valid until it expires, and it can contain alphanumeric characters.
Header	Type: String Constraints: The session ID is used when username and password are not provided. Example: A1B2c3d4E5F6
gwsource	(Mandatory) Source from which the request is triggered.
Query	Type: String

Input Parameter (continued)

Name	Description
Example: <code>DataCenterA</code>	
payload	(Mandatory) Input data for request body in application/json format. For payload details, see Payload section.
Body	

Payload

Name	Description
trustStoreTemplateName	(Mandatory) Name of the trust store template.
String	
clusterNames	(Mandatory) A list of cluster names. These must be valid cluster names.
List	
comments	(Optional) Any comments related to the trust store bundle push.
String	

Status Codes

Status Codes and Description

HTTP Status code	appStatusCode	Message and Possible remediation
200 OK	NA	Success
400 Bad Request	KUBEPLUS-0017	Mandatory field is missing or invalid values specified - <<field name>> Possible remediation: Check and ensure that valid value is provided for <<field name>> field in the request.
401 Unauthorized	AVX_GW_003	Authentication failed, reason - Invalid Credentials

Status Codes and Description (continued)

HTTP Status code	appStatusCode	Message and Possible remediation
		Possible remediation: Ensure that valid username and password or valid sessionId is provided as the header param.

Sample Request/Response

Use case: Revoke the certificate from AppViewX to end cluster.

Request URL

https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-truststore-push?gwsource=kube

Sample Request

```
{
  "payload": {
    "trustStoreTemplateName": "trust-store",
    "clusterNames": [
      "kube-cluster"
    ],
    "comments": "comment"
  }
}
```

Sample Response

```
{
  "response": {
    "message": "trust store push triggered successfully",
    "messageType": "SUCCESS"
  },
  "message": null,
  "headers": null
}
```

Reference

Understanding the sample URL: This section provides an explanation of each component of the sample URL structure used in API requests. For quick reference, this section is referenced in all the API topics as **Reference** in this guide.

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
 - **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsource:** Source or origin of a gateway, for example: **external**.

What's Next

- [Revoke TrustStore Bundle](#)

Revoke TrustStore Bundle

The API will delete truststore endpoint in cluster.

Request Structure

Endpoint:	/kube-truststore-revoke
Type:	POST
Sample URL:	https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-truststore-revoke?gwsource=external

To understand the elements of the sample URL, click here .	
Headers:	
Content-Type:	application/json

Input Parameter

Name	Description
sessionId <i>Header</i>	(Mandatory) A unique identifier assigned to a user's session upon successful authentication. The session ID remains valid until it expires, and it can contain alphanumeric characters. Type: String Constraints: The session ID is used when username and password are not provided. Example: A1B2c3d4E5F6
gwsources <i>Query</i>	(Mandatory) Source from which the request is triggered. Type: String Example: DataCenterA
payload <i>Body</i>	(Mandatory) Input data for request body in application/json format. For payload details, see Payload section.

Payload

Name	Description
trustStoreTemplateName <i>String</i>	(Mandatory) Name of the trust store template.
clusterNames <i>List</i>	(Mandatory) A list of cluster names. These must be valid cluster names.
comments <i>String</i>	(Optional) Any comments related to the trust store bundle revoke.

Status Codes

Status Codes and Description

HTTP Status code	appStatusCode	Message and Possible remediation
200 OK	NA	Success
400 Bad Request	KUBEPLUS-0017	Mandatory field is missing or invalid values specified - <<field name>> Possible remediation: Check and ensure that valid value is provided for <<field name>> field in the request.
401 Unauthorized	AVX_GW_003	Authentication failed, reason - Invalid Credentials Possible remediation: Ensure that valid username and password or valid sessionId is provided as the header param.

Sample Request/Response

Use case: Revoke the certificate from AppViewX to end cluster.

Request URL

`https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-truststore-revoke?gwsource=kube`

Sample Request

```
{
  "payload": {
    "trustStoreTemplateName": "trust-store",
    "clusterNames": [
      "kube-cluster"
    ],
    "comments": "comment"
  }
}
```

Sample Response

```
{
  "response": {
    "message": "trust store revoke triggered successfully",
  }
}
```

```

"messageType": "SUCCESS"
},
"message": null,
"headers": null
}

```

Reference

Understanding the sample URL: This section provides an explanation of each component of the sample URL structure used in API requests. For quick reference, this section is referenced in all the API topics as **Reference** in this guide.

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsouce:** Source or origin of a gateway, for example: **external**.

What's Next

- [Delete TrustStore Bundle](#)

Delete TrustStore Bundle

The API will delete truststore mapping from endpoint.

Request Structure

Endpoint:	/kube-delete-truststore-mapping
Type:	POST
Sample URL:	https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-delete-truststore-mapping? gwsource=external To understand the elements of the sample URL, click here .
Headers:	
Content-Type:	application/json

Input Parameter

Name	Description
sessionId <i>Header</i>	(Mandatory) A unique identifier assigned to a user's session upon successful authentication. The session ID remains valid until it expires, and it can contain alphanumeric characters. Type: String Constraints: The session ID is used when username and password are not provided. Example: A1B2c3d4E5F6
gwsource <i>Query</i>	(Mandatory) Source from which the request is triggered. Type: String Example: DataCenterA
payload <i>Body</i>	(Mandatory) Input data for request body in application/json format. For payload details, see Payload section.

Payload

Name	Description
trustStoreTemplateName	(Mandatory) Name of the trust store template.
<i>String</i>	
clusterNames	(Mandatory) A list of cluster names. These must be valid cluster names.
<i>List</i>	
comments	(Optional) Any comments related to the trust store bundle revoke.
<i>String</i>	

Status Codes

Status Codes and Description

HTTP Status code	appStatusCode	Message and Possible remediation
200 OK	NA	Success
400 Bad Request	KUBEPLUS-0017	Mandatory field is missing or invalid values specified - <<field name>> Possible remediation: Check and ensure that valid value is provided for <<field name>> field in the request.
401 Unauthorized	AVX_GW_003	Authentication failed, reason - Invalid Credentials Possible remediation: Ensure that valid username and password or valid sessionId is provided as the header param.

Sample Request/Response

Use case: Revoke the certificate from AppViewX to end cluster.

Request URL

<https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-delete-truststore-mapping?gwsource=kube>

Sample Request

```
{
  "payload": {
    "trustStoreTemplateName": "trust-store",
    "clusterNames": [
      "kube-cluster"
    ],
    "comments": "comment"
  }
}
```

Sample Response

```
{
  "response": {
    "message": "Trust store mappings deleted successfully",
    "messageType": "SUCCESS"
  },
  "message": null,
  "headers": null
}
```

Reference

Understanding the sample URL: This section provides an explanation of each component of the sample URL structure used in API requests. For quick reference, this section is referenced in all the API topics as **Reference** in this guide.

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT**: AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi**: Path parameter value (static) that is part of the endpoint's URL
- **Endpoint**: Endpoint of the API, for example: **execute-hook**
- **gwsource**: Source or origin of a gateway, for example: **external**.

What's Next

- [Delete TrustStore Template](#)

Create TrustStore Bundle

The API will create an endpoint for an truststore bundle configuration.

Request Structure

Endpoint:	/kube-create-truststore-mapping
Type:	POST
Sample URL:	https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-delete-truststore-mapping? gwsource=external To understand the elements of the sample URL, click here .
Headers:	
Content-Type:	application/json

Input Parameter

Name	Description
sessionId	(Mandatory) A unique identifier assigned to a user's session upon successful authentication. The session ID remains valid until it expires, and it can contain alphanumeric characters.
Header	
Type:	String
Constraints:	The session ID is used when username and password are not provided.

Input Parameter (continued)

Name	Description
	Example: A1B2c3d4E5F6
gwsource	(Mandatory) Source from which the request is triggered.
<i>Query</i>	Type: String
	Example: DataCenterA
payload	(Mandatory) Input data for request body in application/json format. For payload details, see Payload section.
<i>Body</i>	

Payload

Name	Description
trustStoreTemplateName	(Mandatory) Name of the trust store template.
<i>String</i>	
clusterNames	(Mandatory) A list of cluster names. These must be valid cluster names.
<i>List</i>	

Status Codes**Status Codes and Description**

HTTP Status code	appStatusCode	Message and Possible remediation
200 OK	NA	Success
400 Bad Request	KUBEPLUS-0017	Mandatory field is missing or invalid values specified - <<field name>> Possible remediation: Check and ensure that valid value is provided for <<field name>> field in the request.
401 Unauthorized	AVX_GW_003	Authentication failed, reason - Invalid Credentials

Status Codes and Description (continued)

HTTP Status code	appStatusCode	Message and Possible remediation
		Possible remediation: Ensure that valid username and password or valid sessionId is provided as the header param.

Sample Request/Response

Use case: Revoke the certificate from AppViewX to end cluster.

Request URL

https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-create-truststore-mapping?gwsource=kube

Sample Request

```
{
  "payload": {
    "truststoreTemplateName": "truststore-bundle",
    "clusterNames": ["kube-cluster"]
  }
}
```

Sample Response

```
{
  "response": {
    "message": "Mapping successful: Truststore template associated with all selected clusters.",
    "messageType": "SUCCESS"
  },
  "message": null,
  "headers": null
}
```

Reference

Understanding the sample URL: This section provides an explanation of each component of the sample URL structure used in API requests. For quick reference, this section is referenced in all the API topics as **Reference** in this guide.

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.
 - **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsource:** Source or origin of a gateway, for example: **external**.

What's Next

- [TrustStore Content Download](#)

Delete TrustStore Template

The API will delete of truststore bundles, if there is no endpoint is associated.

Request Structure

Endpoint:	/kube-delete-truststore-template
Type:	POST
Sample URL:	https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-delete-truststore-mapping? gwsource=external

To understand the elements of the sample URL, click here .	
Headers:	
Content-Type:	application/json

Input Parameter

Name	Description
sessionId	(Mandatory) A unique identifier assigned to a user's session upon successful authentication. The session ID remains valid until it expires, and it can contain alphanumeric characters.
Header	Type: String
	Constraints: The session ID is used when username and password are not provided.
	Example: A1B2c3d4E5F6
gwsources	(Mandatory) Source from which the request is triggered.
Query	Type: String
	Example: DataCenterA
payload	(Mandatory) List name of truststore bundles that need to be deleted and can be deleted only when there is no endpoint is associated.
Body	

Status Codes

Status Codes and Description

HTTP Status code	appStatusCode	Message and Possible remediation
200 OK	NA	Success
400 Bad Request	KUBEPLUS-0017	Mandatory field is missing or invalid values specified - <<field name>> Possible remediation: Check and ensure that valid value is provided for <<field name>> field in the request.
401 Unauthorized	AVX_GW_003	Authentication failed, reason - Invalid Credentials

Status Codes and Description (continued)

HTTP Status code	appStatusCode	Message and Possible remediation
		Possible remediation: Ensure that valid username and password or valid sessionId is provided as the header param.

Sample Request/Response

Use case: Revoke the certificate from AppViewX to end cluster.

Request URL

https://<IP/HostName/TenantName>:<GWPORT>/avxapi/kube-delete-truststore-mapping?gwsource=kube

Sample Request

```
{
  "payload": ["t1","t2"]
}
```

Sample Response

```
{
  "response": {
    "message": "Trust store templates deleted successfully",
    "messageType": "SUCCESS"
  },
  "message": null,
  "headers": null
}
```

Reference

Understanding the sample URL: This section provides an explanation of each component of the sample URL structure used in API requests. For quick reference, this section is referenced in all the API topics as **Reference** in this guide.

- **IP/HostName/TenantName:** Replace with the actual IP address, hostname, or tenant name based on the specific configuration in AppViewX.

- **IP:** A unique identifier assigned to each device connected to a computer network that uses the Internet Protocol for communication

The IP address will be included in the endpoint URL for an on-prem deployment.

- **HostName:** A human-readable label assigned to a device (host) on a network

The hostname will be included in the endpoint URL for an on-prem deployment.

- **TenantName:** An identifier label for a tenant given to indicate which tenant's data the API request will access/modify

The tenant name will be included in the endpoint URL for a SaaS deployment.

- **GWPORT:** AppViewX gateway port

A gateway port refers to a network port through which data is sent and received to communicate with a gateway in an on-prem deployment.

Example: **31443**

- **avxapi:** Path parameter value (static) that is part of the endpoint's URL
- **Endpoint:** Endpoint of the API, for example: **execute-hook**
- **gwsouce:** Source or origin of a gateway, for example: **external**.

What's Next

- [Create TrustStore Bundle](#)

Chapter 3: KUBE+ Upgrade Guide

- [Introduction](#)
- [Steps for Cert-Orchestrator Migration from v1.2 to v1.3](#)
- [Steps for Cert-Orchestrator Migration from v1.3 to v1.4](#)

Introduction

When migrating the AppViewX Compute cluster, it is necessary to upgrade the Cloud Connector and Cert Orchestrator to enable the latest KUBE+ features.

Upgrade the Cloud Connector by selecting the upgrade option on the Cloud Connector page.

Due to changes in the API that Cert Orchestrator uses to communicate with AppViewX, Cert Orchestrator should also be upgraded after upgrading the compute cluster.

Steps for Cert-Orchestrator Migration from v1.2 to v1.3

Here are the steps for upgrading AppViewX KUBE+ to leverage the enhanced features introduced in the AppViewX 2023.1.0 FPs release:

1. Update the crypto-mesh helm repo by executing the command `helm repo update <REPO_NAME>`.
2. Get v1.3 helm chart by executing the command `helm pull <REPO_NAME>/crypto-mesh --version v1.3`.



Note: This command will download the helm chart for crypto-mesh v1.3 and save it as `crypto-mesh-v1.3.tgz` in the current folder.

3. Extract the contents of the `crypto-mesh-v1.3.tgz` file by executing the command `tar -xvf crypto-mesh-v1.3.tgz`.



Note: This command will extract the contents of the tarball (tgz file) and create a folder named 'crypto-mesh' with the extracted files in the current directory.

4. Apply CRDs of v1.3 from the above folder by executing the command `kubectl apply -f ./crypto-mesh/crds/cert-orchestrator/`
5. Upgrade cert-orchestrator from v1.2 to v1.3 using "helm upgrade" by executing the following command:

```
helm upgrade <HELM_NAME> <REPO_NAME>/crypto-mesh --version v1.3 --namespace
```

```
<NAMESPACE> --set
certOrchestrator.discovery.credentialSecretName=appviewx-auth --set
certOrchestrator.discovery.credentialSecretNamespace=<NAMESPACE> --set
certOrchestrator.discovery.isGroupAutoGenerate=<true/false> --set
certOrchestrator.global.clusterName=<CLUSTER_NAME> --set
certOrchestrator.global.k8sVendor=<VENDOR>
```

Make sure to replace the placeholders with the actual values:

- a. <HELM_NAME>: Existing Helm name for cert-orchestrator. To get the existing helm name, execute the command `helm ls -A | grep crypto-mesh-v1.2`.
- b. <REPO_NAME>: Name of the Helm repository.
- c. <NAMESPACE>: Namespace where cert-orchestrator is installed. To get the existing namespace, execute the command `helm ls -A | grep crypto-mesh-v1.2`.
- d. <CLUSTER_NAME>: Existing cluster name. To get the existing cluster name, execute the command `kubectl get deployment cert-orchestrator -n <NAMESPACE> -o yaml | grep cluster-name`
- e. <VENDOR>: Vendor type (Self-Managed/EKS/AKS/GKE/OpenShift).

Steps for Cert-Orchestrator Migration from v1.3 to v1.4

Here are the steps for upgrading AppViewX KUBE+ to leverage the enhanced features introduced in the AppViewX 2024.0.1.0 HFs release:

1. Update the crypto-mesh helm repo by executing the command `helm repo update <REPO_NAME>`.
2. Get v1.4 helm chart by executing the command `helm pull <REPO_NAME>/crypto-mesh --version v1.4`.



Note: This command will download the helm chart for crypto-mesh v1.4 and save it as **crypto-mesh-v1.4.tgz** in the current folder.

3. Extract the contents of the **crypto-mesh-v1.4.tgz** file by executing the command `tar -xvf crypto-mesh-v1.4.tgz`.



Note: This command will extract the contents of the tarball (tgz file) and create a folder named 'crypto-mesh' with the extracted files in the current directory.

4. Apply CRDs of v1.4 from the above folder by executing the command `kubectl apply -f ./crypto-mesh/crds/cert-orchestrator/`

5. Upgrade cert-orchestrator from v1.3 to v1.4 using "helm upgrade" by executing the following command:

```
helm upgrade <HELM_NAME> <REPO_NAME>/crypto-mesh --version v1.4 --namespace crypto-mesh --set certOrchestrator.namespace=crypto-mesh
--set certOrchestrator.global.clusterName=dev-cluster.appviewx.net --set certOrchestrator.global.k8sVendor='Self-ManagedK8s' --set
certOrchestrator.discovery.credentialSecretName=appviewx-auth --set certOrchestrator.discovery.credentialSecretNamespace=crypto-mesh
--set appviewxInfraOrchestrator.enabled=True --set appviewxCSPProvider.enabled=True --set appviewxSigner.enabled=True
--set certOrchestrator.discovery.enabled=True --set certOrchestrator.discovery.isGroupAutoGenerate=True --set
certOrchestrator.global.logLevel=7 --set certOrchestrator.image.repository=repos.appviewx.com/integration/appviewx/cert-orchestrator
--set appviewxCSPProvider.image.repository=repos.appviewx.com/integration/appviewx/appviewx-csi-provider --set
appviewxInfraOrchestrator.image.repository=repos.appviewx.com/integration/appviewx/appviewx-infra-orchestrator --set
certOrchestrator.discovery.isPrivateKeyDiscovery=True
```

Make sure to replace the placeholders with the actual values:

- a. <HELM_NAME>: Existing Helm name for cert-orchestrator. To get the existing helm name, execute the command `helm ls -A | grep crypto-mesh-v1.4`.
- b. <REPO_NAME>: Name of the Helm repository.

Chapter 4: KUBE+ as an EKS Addon - AWS Marketplace

- [AppViewX KUBE+ for Workload Certificate Management: An AWS EKS Add-On](#)
- [Signing Up for the Free Trial via the AWS Marketplace](#)

AppViewX KUBE+ for Workload Certificate Management: An AWS EKS Add-On

Amazon Elastic Kubernetes Service (EKS) is a managed container service to run and scale Kubernetes applications in the Amazon Web services (AWS) cloud. AppViewX provides an EKS Add-on available in the AWS marketplace that allows you to seamlessly deploy the KUBE+ solution to Amazon EKS clusters to efficiently manage certificate management for your container workloads.

For more information, read the official AWS documentation at [Amazon EKS add-ons](#).

Benefits

The AppViewX KUBE+ Amazon EKS Add-on:

1. Provides simplified installation, configuration and management of x509 certificates on the Amazon EKS clusters.
2. Includes the latest security patches, bug fixes, and are validated by AWS to work with Amazon EKS.

Install the EKS Add-on

To install the EKS Add-on and manage the x509 certificates follow these steps:

- Step 1: Subscribe to the EKS Add-on in the AWS Marketplace
- Step 2: Ensure access to a valid AppViewX KUBE+ Subscription
- Step 3: Connect your EKS Cluster to AppViewX


Step 1: Subscribe to the EKS Add-on in the AWS Marketplace

In your AWS Marketplace, ensure the following:


- You have sufficient permissions in your AWS account to enable this Add-on.
- Complete the subscription process in the AWS console. Go to the AWS Marketplace Page to add the AppViewX KUBE+ - EKS Add-on to your AWS account.

Below steps will navigate you through the add-on subscription process.

1. Accessing the EKS console - In your AWS account navigate to the **EKS Console** > **Clusters** and select the cluster where the AppViewX add-on is to be deployed.

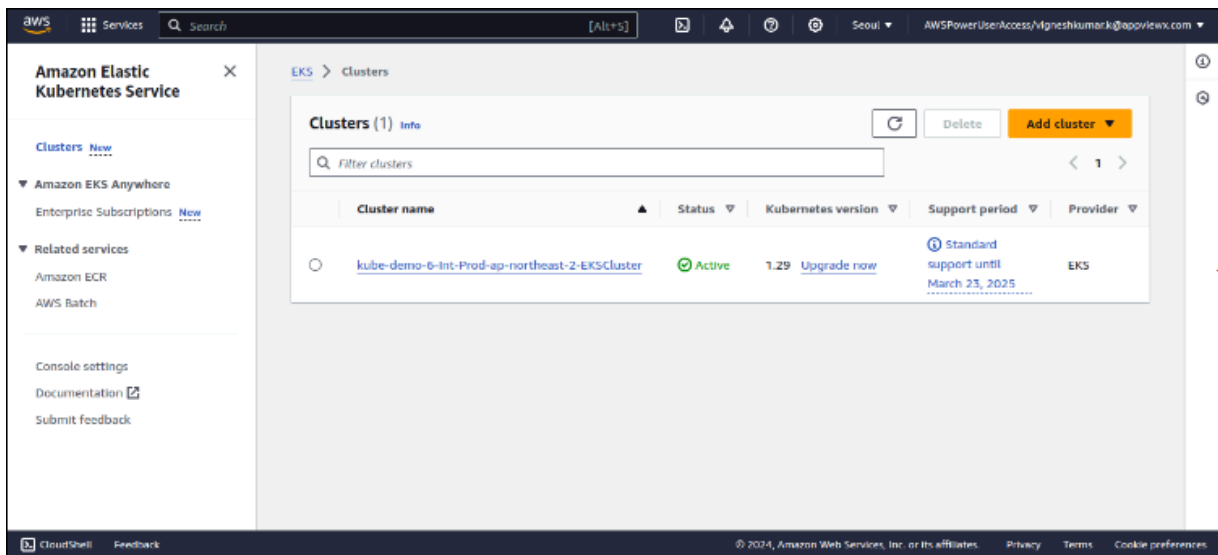


2. Subscribing for Marketplace Add-on - In the **Cluster info** section, navigate to the **Add-ons** tab and click the **Get more add-ons** button.

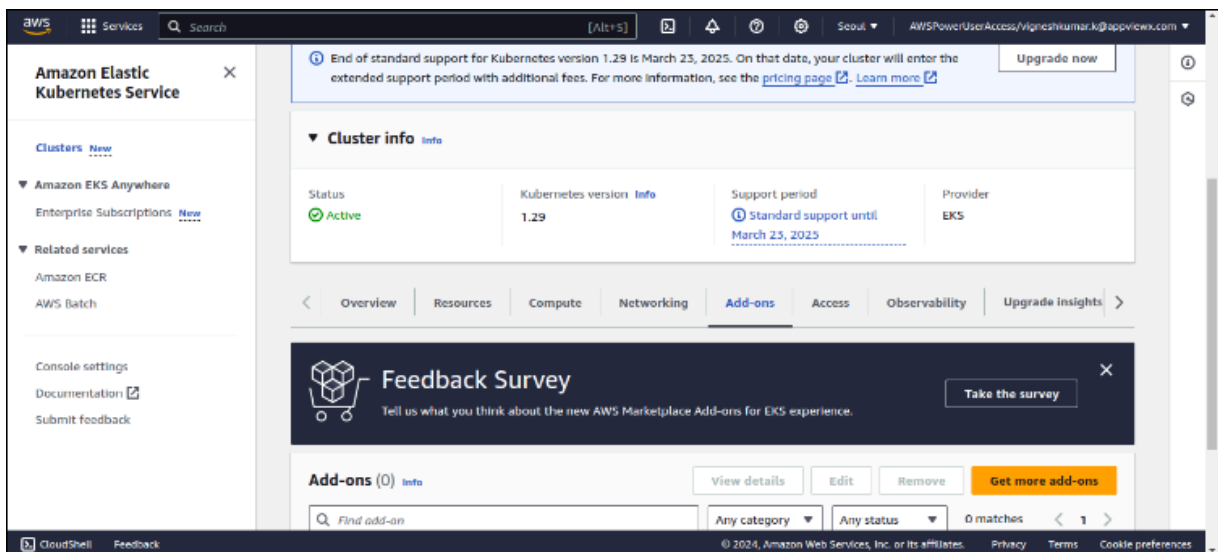


3. In the add-ons section, under the **AWS Marketplace add-ons**, do the following steps:

- a. Search for AppViewX.
- b. Select the **AppViewX EKS Addon - Certificate Lifecycle Management for containers** checkbox.
- c. Click **Next**.

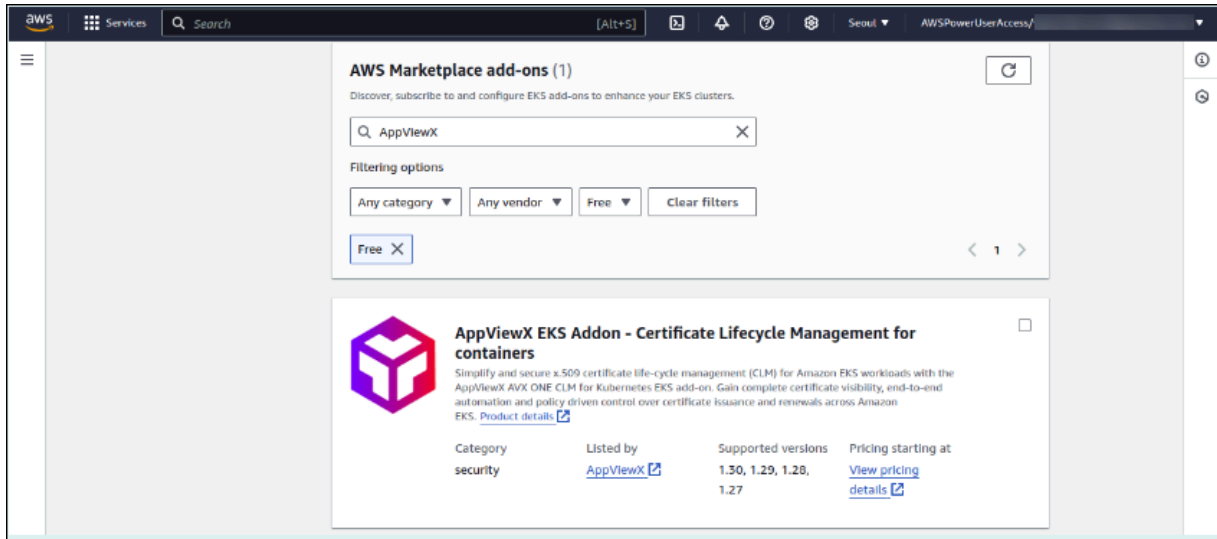


4. Choosing the Add-on and making the marketplace subscription:

- a. Select the add-on version click on **View Subscription**.

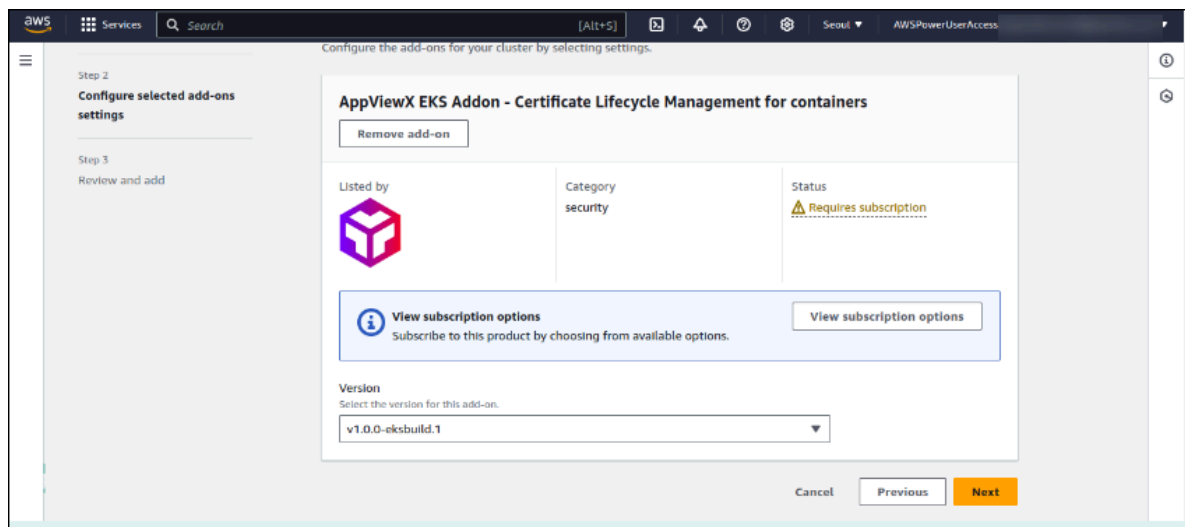


b. Verify the subscription options, and then click **Subscribe**.

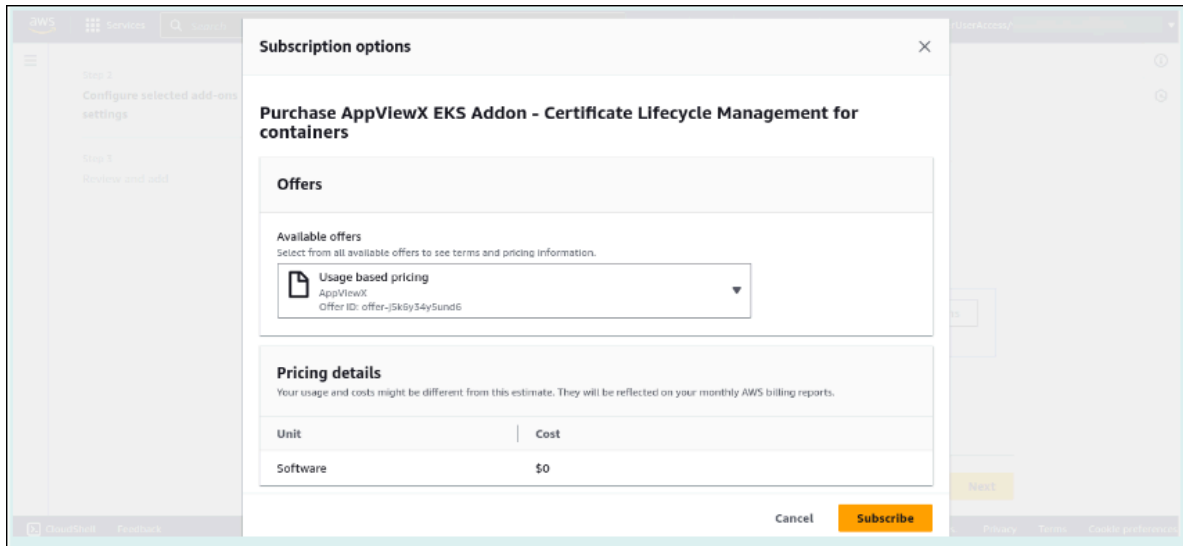


5. Continuing with add-on configuration & installation


a. Once the subscription status is **Ready to Install** continue select the version and click **Next**.

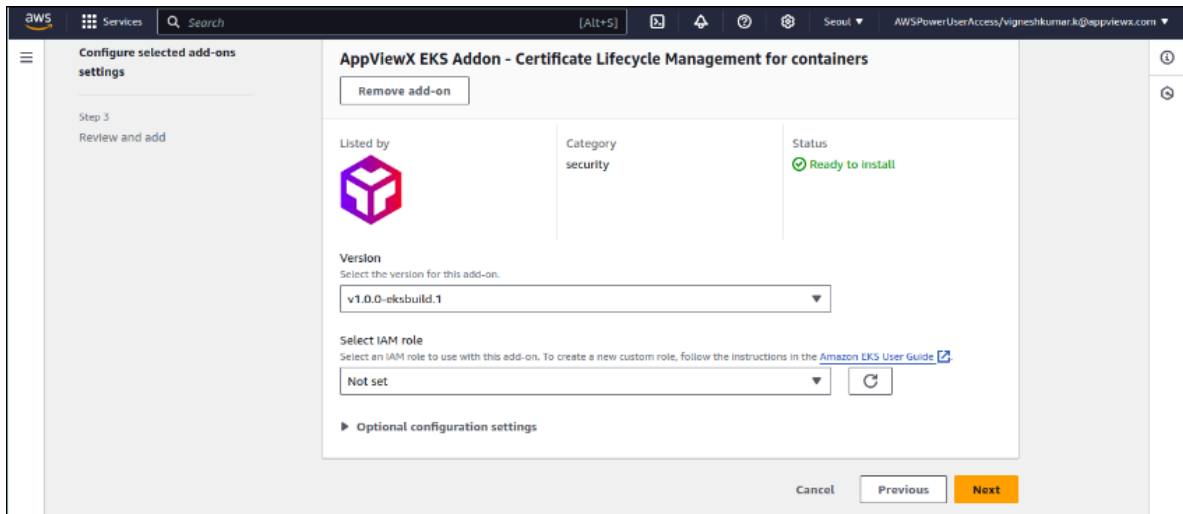

b. In the next page, review the subscription and the add-on configuration, and then click **Create**.

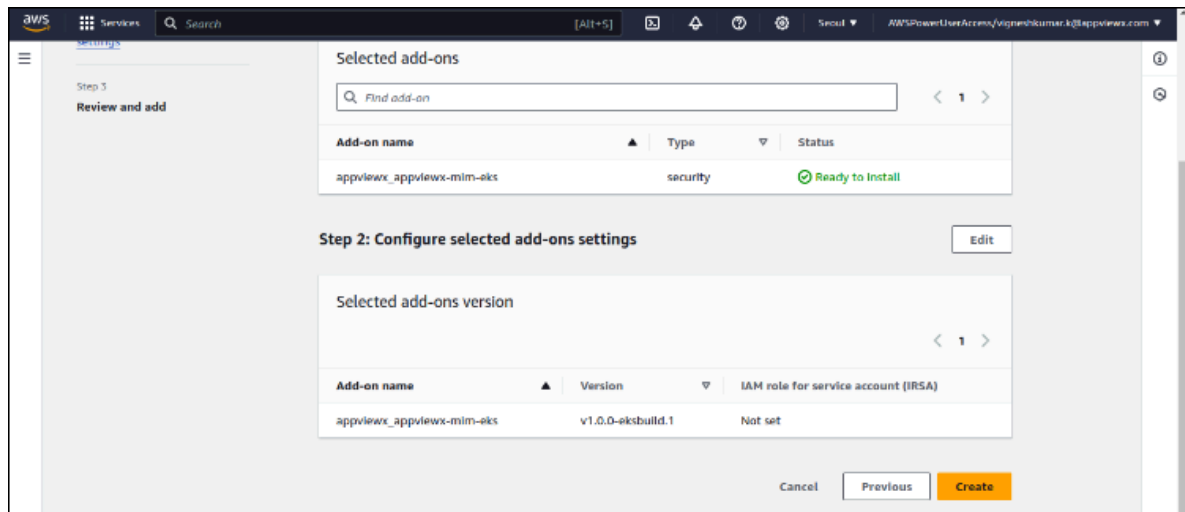

6. Verifying the add-on installation at the cluster end - After selecting the **Create** action, the KUBE+ add-on is automatically deployed to the clusters, and the status on the cluster add-on page updates to **Creating**.

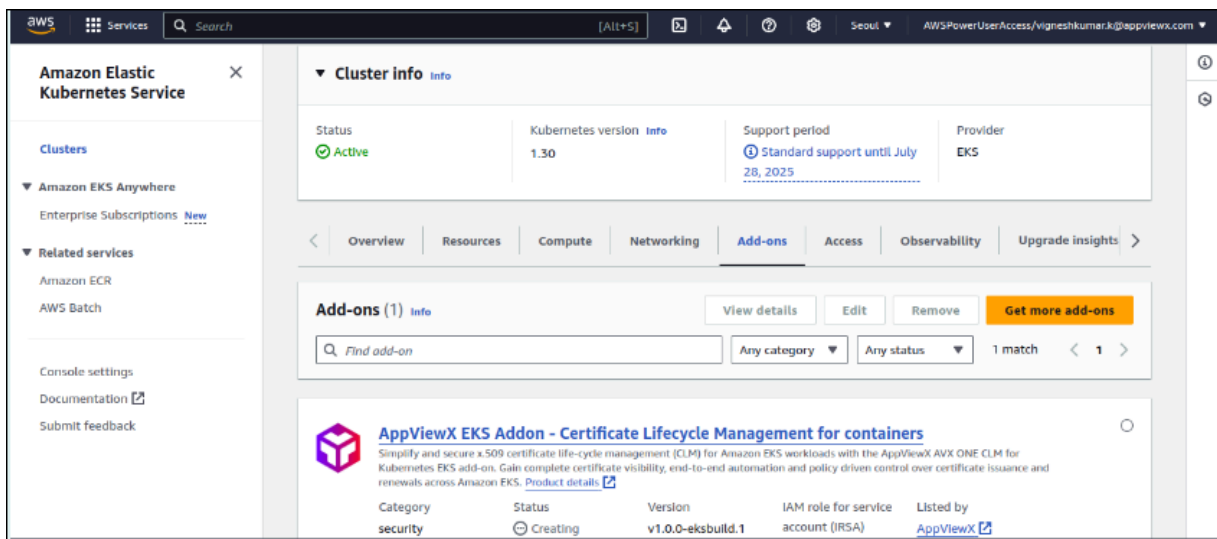

7. To verify the add-on pod running status, log in to the cluster and verify the install.

- Log in to bastion / cluster and with necessary access permissions, execute the `kubectl` commands to verify the pod status.
- To verify if the pod is running, execute the command `kubectl get pods -n crypto-mesh`.

```

appviewx@ip-10-181-57-3 ~]$ kubectl get pods -A
NAMESPACE   NAME                                     READY   STATUS             RESTARTS   AGE
crypto-mesh  cert-orchestrator-7748595f75-2svkw    1/2     CrashLoopBackOff   5 (2m44s ago)  5m58s
kube-system  aes-node-px4t4                         2/2     Running          0           20m
kube-system  coredns-f94fb47d9-297ms               1/1     Running          0           24d
kube-system  coredns-f94fb47d9-3c9ms               1/1     Running          0           24d
kube-system  kube-proxy-rxrb6                      1/1     Running          0           20m
appviewx@ip-10-181-57-3 ~]$

```



Note: The result of the command provided above is expected to have a **CrashLoopBackoff** status.

The administrator/user should download the credentials from a valid AppViewX Subscription to connect the add-on to an AppViewX KUBE+ environment.

Step 2: Ensure access to a valid AppViewX KUBE+ Subscription


For users evaluating the AppViewX KUBE+ solution as a Service (SaaS), which enables turnkey Certificate Lifecycle Management on the container workloads, AppViewX enables multiple channels to onboard you for a free trial / paid subscription of the product:

- via the AWS Marketplace
- via request to AppViewX
- Alternatively existing AppViewX customers ensure to have KUBE+ license subscription

1. Via AWS Marketplace

- a. Navigate to the [Marketplace](#).

The **AppViewX KUBE+** page is displayed.

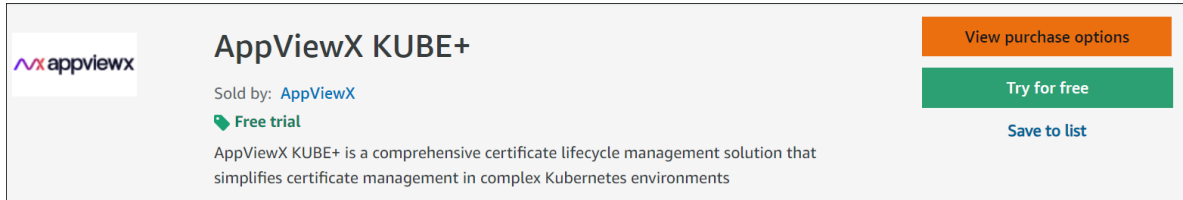

2. Sign into your account or create your account if you are new to AWS Marketplace.
3. Click **Continue to Subscribe**.



Note: The marketplace subscription steps for KUBE+ product of AppViewX are provided [here](#).


4. Via request to AppViewX - For a SaaS instance from appviewx for free trial or paid subscription reach sales@appviewx.com

Step 3: Connect your EKS cluster to AppViewX


To connect EKS cluster to AppViewX, ensure the following:

- You have access to the AppViewX (available as) SaaS, Onprem or Managed K8s based deployments.
- You have sufficient Permission to access the KUBE+ feature sets.


1. Accessing the AppViewX console - Access your AppViewX tenant/deployment with the login credentials. Go to **Menu > KUBE+**.

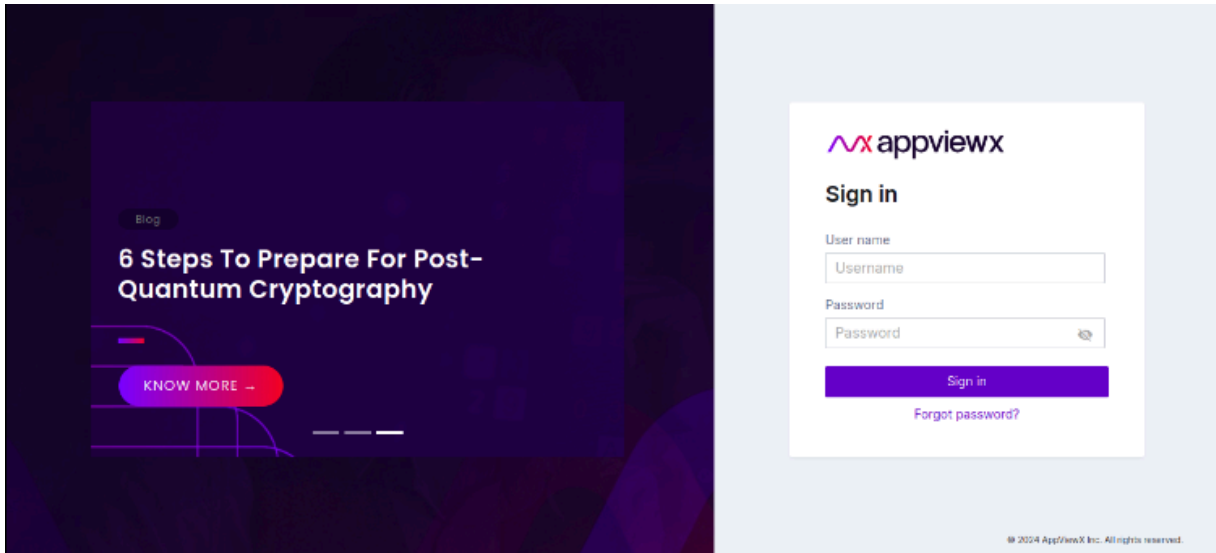

2. Generate Credentials or Access Token for connectivity:
 - a. Generate authentication credentials for connecting the EKS add-on to AppViewX. Go to **Menu > KUBE+ > Cluster Inventory > Connect Cluster > EKS Addon > Get started**.

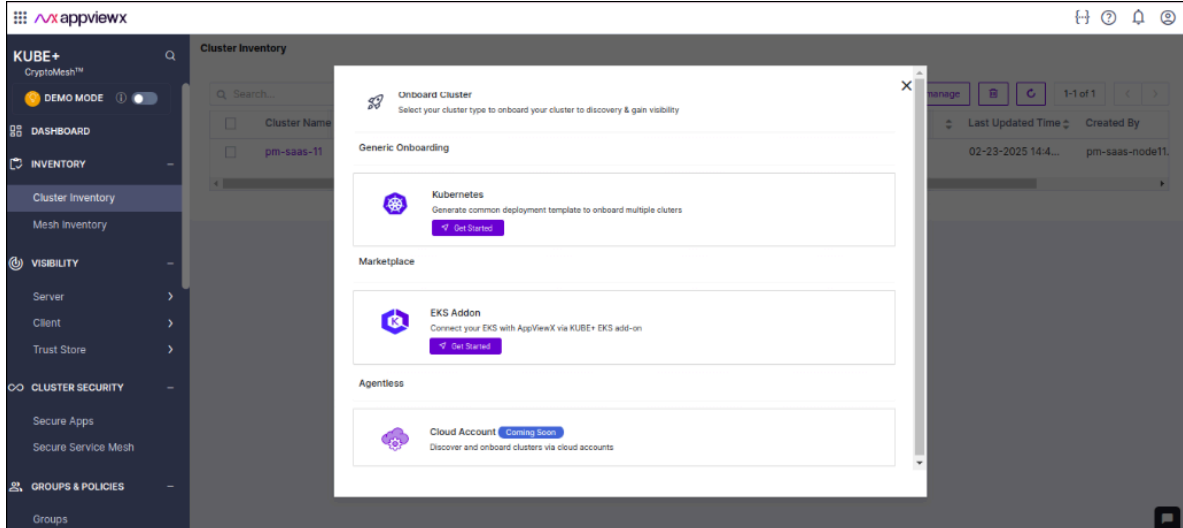

- b. Provide the cluster name and select the vendor and click **Generate Install Command**.

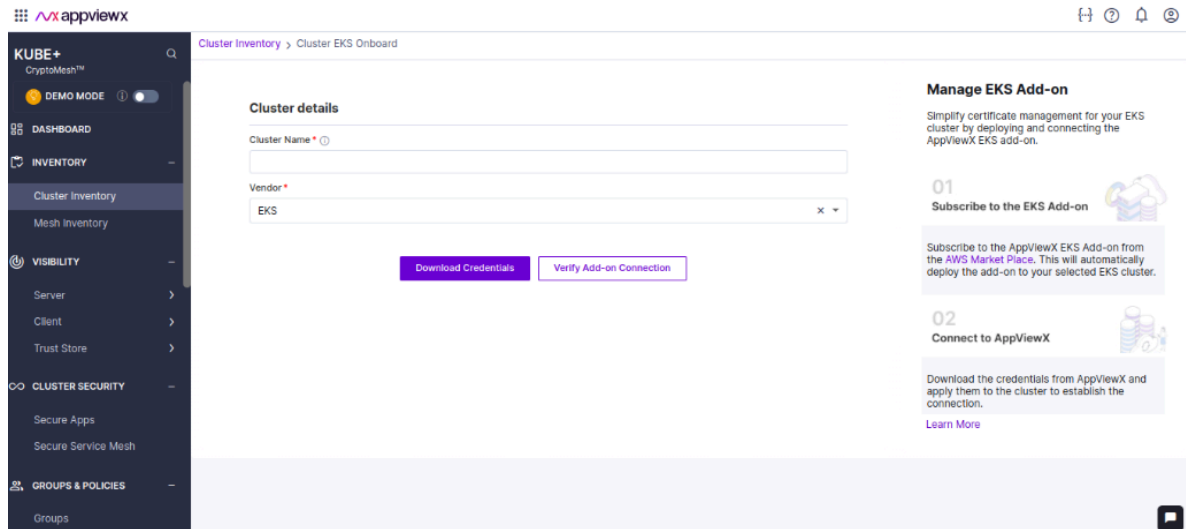


c. Download the authentication credentials as YAML by clicking the **Download Credentials** and exit back to the inventory.

3. Deploy credentials in the EKS cluster: Copy the YAML to the Bastion host or to the cluster for deploying the credentials in the cluster.

Step 4: Deploy credentials and manage EKS cluster in AppViewX

Deploy the above saved YAML to the cluster with the command `kubectl apply -f secret.yaml` and once the connection is established the cluster is automatically managed in AppViewX KUBE+ Cluster Inventory.

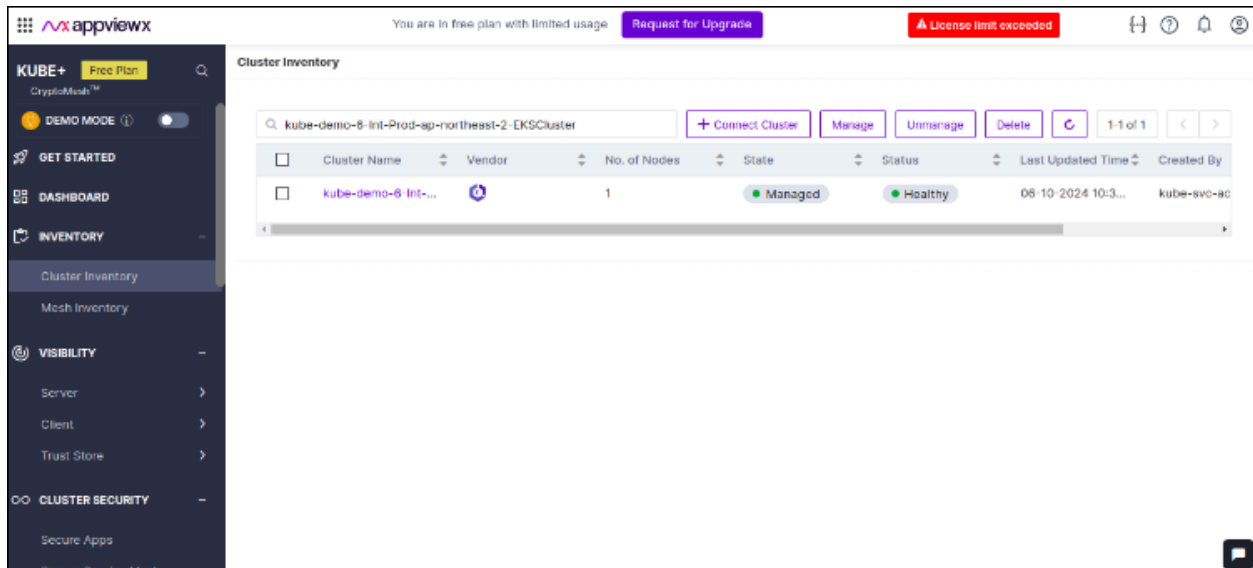

Manage SSL/TLS certificates in your EKS

With the above mentioned steps you should be able to successfully deploy the AppViewX KUBE+ EKS addon and manage the cluster in the AppViewX Cluster Inventory.

Once the cluster is managed, you can refer to the [AppViewX KUBE+](#) documentation on how to use KUBE+ for certificate management operations (discover, monitor and enroll certificates) for your EKS cluster.


Signing Up for the Free Trial via the AWS Marketplace

To get started with the KUBE+ SaaS free trial, you can sign up via the AWS Marketplace and set up the SaaS by following the steps given below:

Step 1: Accessing the AWS Marketplace Sign Up Page

1. Navigate to the [AWS Marketplace](#) page.
2. Sign into your account or create your account if you are new to AWS Marketplace.
3. Search for AppViewX KUBE+ in the search bar and select it from the search result.

The **AppViewX KUBE+** page is displayed.

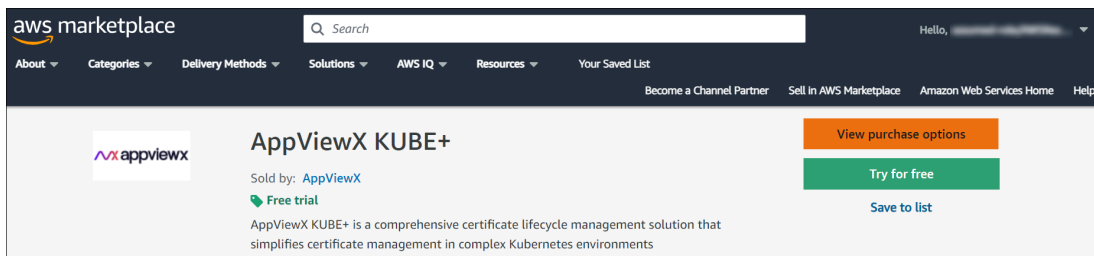

4. In case you have a private offer from AppViewX, it will be listed on top of the next page. Make sure you select the private offer and not the public offers.

In case you are here for the first time and do not have a private offer listed, select **Try for free** option.

5. Select the desired **Contract**

Configure your Software Contract

Choose the offer that suits your needs. You will be charged for your purchase on your AWS bill. After you purchase a contract, you will be directed to the vendor's website to complete setup and begin using this software. For any software use beyond your contract limit, you will be charged based on usage pricing.

How long do you want your contract to run?

☒ 30 days

Renewal settings

Automatic Renewal is not offered for this offer. Your contract will expire at the duration you select above. Please reach out to the seller with any questions.

Contract options

☒ Free **\$0 / Units**

For Monitoring/Managing SSL Certs in 20 Worker Nodes (30 Days Trial)

Purchase order [Learn more](#)

Purchase order number - *optional*

[Add purchase order number](#)

[Create contract](#)

By subscribing to this software, you agree to the pricing terms and the seller's [End User License Agreement \(EULA\)](#). You also agree and acknowledge that AWS may, on your behalf, share information about this transaction (including your payment terms) with the respective seller, reseller or underlying provider, as applicable, in accordance with the [AWS Privacy Notice](#). AWS will issue invoices and collect payments from you on behalf of the seller through your AWS account. Your use of AWS services is subject to the [AWS Customer Agreement](#) or other agreement with AWS governing your use of such services. If you are receiving a private offer from a channel partner, you may click [here](#) (for CPPO transaction) or [here](#) (for SPPO transaction) for more information on the channel partner.

options.

6. Click **Create contract** to create the contract for AppViewX KUBE+.

A confirmation dialog box is displayed.

7. In the confirmation dialog box, click **Setup your account** to complete the signup.

You will be redirected to the AppViewX SaaS registration page.

Step 2: Filling the Sign Up Form

1. To get started with your free trail, enter the following details:

Field	Description
First Name*	Enter your first name.
Last name*	Enter your last name.
Business Email*	Enter your business email address.

Field	Description
Company Name*	Enter your company name.
Enter Custom Domain*	By default, the company name is auto-filled. Enter a custom domain if you want to.
Select Service Region*	The service region is where your SaaS account will be set up and localized. You cannot migrate data between regions. Select from one of the service regions: • US (Americas) • EMEA • APAC
Select Country*	Select the country from the dropdown list.


**Note:**

- Fields marked with the asterisk (*) symbol are mandatory.
- If you are creating a free or trial account, there are email restrictions put in place for security reasons. Email addresses from Gmail.com, Outlook.com, Yahoo.com, and other personalized email addresses are restricted and may not be used for trial account creation purposes.

2. From the **What are you trying to solve** list, select the corresponding checkboxes for your requirements.
3. To acknowledge that you have read and reviewed AppViewX's Terms of Service and their Privacy Policy, select the **By checking this box, I acknowledge...** checkbox.
4. Click **Get Started**. The message, *Thank you for signing up for the free trial! You will receive an email from us shortly*, is displayed.

Step 3: Verifying your Email

On clicking **Get Started**, you will get a verification email to your registered email address. Click **Verify Email Address** to get your SaaS account set-up.

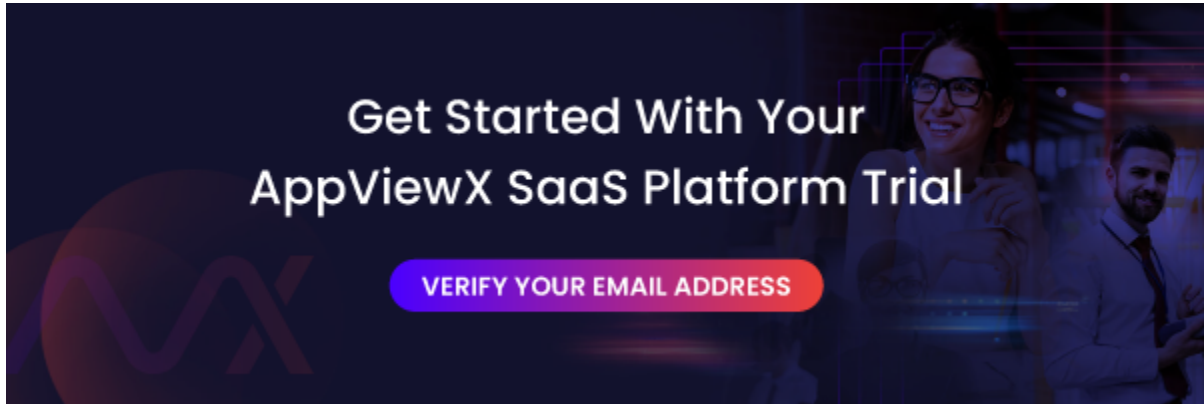**Note:**

- If you do not see the email in your inbox, then check the Junk/Spam folder. Whitelist the email address so you receive all AppViewX emails in your inbox.
- Confirm your email address within 48hours.


Wait for a couple of minutes until your email address is successfully verified.

Step 4: Logging in to your SaaS Account

Based on the details entered, you will receive a welcome email on your registered email ID. The email includes your login URL and temporary credentials.

1. Navigate to the login URL.

The login page is displayed.

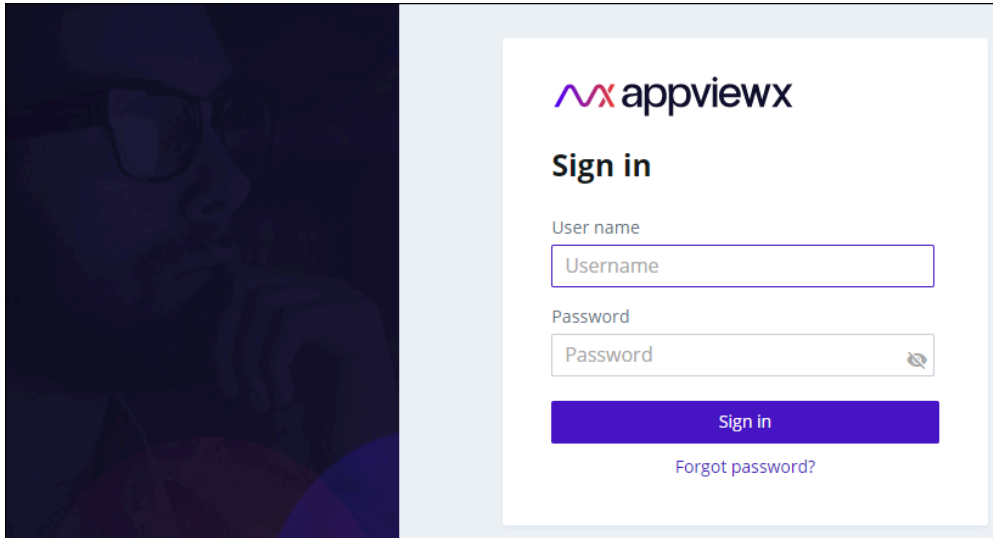

2. From the welcome email, login using the credentials provided.

On successful login, the OTP verification screen is displayed. You will receive the OTP on your registered email address.

A screenshot of the AppViewX OTP verification screen. It shows a message: 'We have sent an otp to your email ID nik*****j@appviewx.com'. Below this is a section titled 'Enter OTP' with a text input field containing the placeholder 'Enter verification code'. A blue 'Continue' button is positioned below the input field. Under the button is a link: 'Didn't receive a code? Resend in 55 Sec'. At the bottom, there is a checkbox labeled 'Do not ask OTP again for 24 hours'.

3. Enter the OTP received.

On entering the correct OTP, the **Change password** screen is displayed.

Change password

Your password must be changed before logging in for first time.

Enter New Password ⓘ

Enter new password

Confirm New Password

Confirm new password

Continue

[← Back to Login](#)

4. Enter and reenter your new password in the **Enter New Password** and **Confirm New Password** fields respectively.



Note: The password must:

- Have at least one uppercase character
- Have at least one lowercase character
- Have one special character such as ~!@#\$%^&* _-+=|()
- Have minimum of 6 characters and maximum of 24 characters
- Not contain user name
- Not contain more than 3 same characters continuously, for example, aaa
- Not contain blank space

5. Click **Continue**.

A message notifying successful password change is displayed.

You will be redirected to the login page again.

6. Sign in with your new credentials.
7. In the **OTP Verification** screen, enter the OTP received on your registered email and click **Continue**.
8. On the **Terms of Service** screen, select the **I accept the terms and conditions** checkbox and click **Continue**.

The **AppViewX Platform** landing page is displayed.

9. To try a product, click **Try Now** to start your 30-day trial of the product.

You will be redirected to the **GET STARTED** page of the selected product.



Note: The 30-day trial period starts from the day you receive the welcome email. The trial period can be extended by 60 more days (which makes the trial duration 90 days). For more details on how you can extend your trial, please reach out to [AppViewX Support](#).

Step 5: Setting up the AppViewX Cloud Connector

The AppViewX Cloud Connector can be set up in two different ways:

- Using the Automated Script

For instructions on setting up the AppViewX Cloud Consumer using the Automated Script, click [here](#).

- Using AppViewX User Interface

For instructions on setting up the AppViewX Cloud Consumer using AppViewX User Interface, click [here](#).

To understand the difference between the two methods, click [here](#).

Step 6: Getting Started with AppViewX SaaS

To simplify your interaction with the product's features, AppViewX offers exhaustive documentation in the form of the following guides:

- [AppViewX Cloud Connector User Guide](#)
- [KUBE+ User Guide](#)

You can access the complete AppViewX documentation [here](#).